

3 Watt Plastic Surface Mount Zener Voltage Regulators

SZ1SMB59xxT3G-VF01 Series

This complete new line of 3 W Zener diodes offers the following advantages.

Features

- Zener Voltage Range – 3.3 V to 100 V
- ESD Rating of Class 3 (> 16 kV) per Human Body Model
- Flat Handling Surface for Accurate Placement
- Package Design for Top Side or Bottom Circuit Board Mounting
- SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant*

Mechanical Characteristics:

CASE: Void-free, transfer-molded plastic

FINISH: All external surfaces are corrosion resistant and leads are readily solderable

MAXIMUM LEAD TEMPERATURE FOR SOLDERING PURPOSES:
260°C for 10 Seconds

LEADS: Modified L-Bend providing more contact area to bond pads

POLARITY: Cathode indicated by polarity band

FLAMMABILITY RATING: UL 94 V-0

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Maximum Steady State Power Dissipation @ $T_L = 75^\circ\text{C}$ Measured at Zero Lead Length Derate Above 75°C	P_D	3.0	W
Thermal Resistance from Junction-to-Lead	$R_{\theta JL}$	40 25	mW/°C °C/W
Maximum Steady State Power Dissipation @ $T_A = 25^\circ\text{C}$ (Note) Derate Above 25°C Thermal Resistance from Junction-to-Ambient	P_D $R_{\theta JA}$	550 4.4 226	mW mW/°C °C/W
Operating and Storage Temperature Range	T_J, T_{stg}	-65 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


1. FR-4 board, using recommended footprint.

*For additional information on our Pb-Free strategy and soldering details, please download the [onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D](#).

PLASTIC SURFACE MOUNT ZENER VOLTAGE REGULATOR DIODES 3.3–100 V, 3 W DC POWER



SMB
CASE 403A
PLASTIC



MARKING DIAGRAM



- A = Assembly Location
Y = Year
WW = Work Week
9xxB = Device Code (Refer to page 2)
■ = Pb-Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

Device	Package	Shipping†
SZ1SMB59xxBT3G-VF01	SMB (Pb-Free)	2,500 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, [BRD8011/D](#).

DEVICE MARKING INFORMATION

See specific marking information in the device marking column of the Electrical Characteristics table on page 2 of this data sheet.


SZ1SMB59xxT3G-VF01 Series

ELECTRICAL CHARACTERISTICS

($T_L = 30^\circ\text{C}$ unless otherwise noted,

$V_F = 1.5\text{ V Max. @ } I_F = 200\text{ mA(dc)}$ for all types)

Symbol	Parameter
V_Z	Reverse Zener Voltage @ I_{ZT}
I_{ZT}	Reverse Current
Z_{ZT}	Maximum Zener Impedance @ I_{ZT}
I_{ZK}	Reverse Current
Z_{ZK}	Maximum Zener Impedance @ I_{ZK}
I_R	Reverse Leakage Current @ V_R
V_R	Reverse Voltage
I_F	Forward Current
V_F	Forward Voltage @ I_F
I_{ZM}	Maximum DC Zener Current

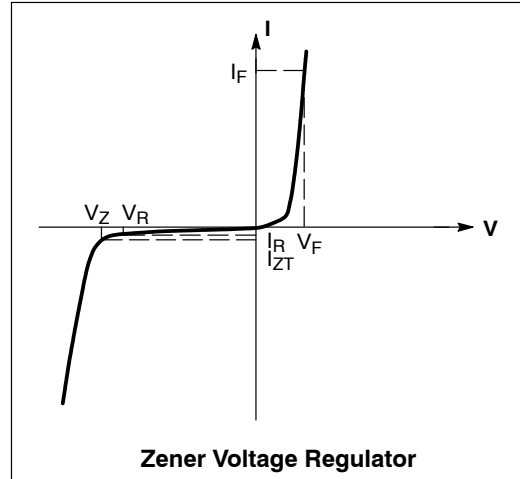

ELECTRICAL CHARACTERISTICS ($T_L = 30^\circ\text{C}$ unless otherwise noted, $V_F = 1.5\text{ V Max. @ } I_F = 200\text{ mA(dc)}$ for all types)

(Devices listed in **bold, italic** are onsemi Preferred devices.)

Device (Note 2)	Device Marking	Zener Voltage (Note 3)				Zener Impedance (Note 4)			Leakage Current		I _{ZM}
		V _Z (Volts)			@ I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _R @ V _R			
		Min	Nom	Max	mA	Ω	Ω	mA	μA	Volts	
SZ1SMB5914BT3G-VF01 <i>SZ1SMB5915BT3G-VF01</i>	914B <i>915B</i>	3.42 <i>3.70</i>	3.6 <i>3.9</i>	3.78 <i>4.10</i>	104.2 <i>96.1</i>	9 <i>7.5</i>	500 <i>500</i>	1 <i>1</i>	75 <i>25</i>	1 <i>1</i>	416 <i>384</i>
<i>SZ1SMB5917BT3G-VF01</i>	<i>917B</i>	<i>4.46</i>	<i>4.7</i>	<i>4.94</i>	<i>79.8</i>	<i>5</i>	<i>500</i>	<i>1</i>	<i>5</i>	<i>1.5</i>	<i>319</i>
<i>SZ1SMB5918BT3G-VF01</i>	<i>918B</i>	<i>4.84</i>	<i>5.1</i>	<i>5.36</i>	<i>73.5</i>	<i>4</i>	<i>350</i>	<i>1</i>	<i>5</i>	<i>2</i>	<i>294</i>
<i>SZ1SMB5919BT3G-VF01</i>	<i>919B</i>	<i>5.32</i>	<i>5.6</i>	<i>5.88</i>	<i>66.9</i>	<i>2</i>	<i>250</i>	<i>1</i>	<i>5</i>	<i>3</i>	<i>267</i>
<i>SZ1SMB5920BT3G-VF01</i>	<i>920B</i>	<i>5.89</i>	<i>6.2</i>	<i>6.51</i>	<i>60.5</i>	<i>2</i>	<i>200</i>	<i>1</i>	<i>5</i>	<i>4</i>	<i>241</i>
<i>SZ1SMB5923BT3G-VF01</i>	<i>923B</i>	<i>7.79</i>	<i>8.2</i>	<i>8.61</i>	<i>45.7</i>	<i>3.5</i>	<i>400</i>	<i>0.5</i>	<i>5</i>	<i>6.5</i>	<i>182</i>
SZ1SMB5924BT3G-VF01	924B	8.64	9.1	9.56	41.2	4	500	0.5	5	7	164
<i>SZ1SMB5925BT3G-VF01</i>	<i>925B</i>	<i>9.5</i>	<i>10</i>	<i>10.5</i>	<i>37.5</i>	<i>4.5</i>	<i>500</i>	<i>0.25</i>	<i>5</i>	<i>8</i>	<i>150</i>
<i>SZ1SMB5926BT3G-VF01</i>	<i>926B</i>	<i>10.45</i>	<i>11</i>	<i>11.55</i>	<i>34.1</i>	<i>5.5</i>	<i>550</i>	<i>0.25</i>	<i>1</i>	<i>8.4</i>	<i>136</i>
<i>SZ1SMB5927BT3G-VF01</i>	<i>927B</i>	<i>11.4</i>	<i>12</i>	<i>12.6</i>	<i>31.2</i>	<i>6.5</i>	<i>550</i>	<i>0.25</i>	<i>1</i>	<i>9.1</i>	<i>125</i>
SZ1SMB5928BT3G-VF01	928B	12.35	13	13.65	28.8	7	550	0.25	1	9.9	115
<i>SZ1SMB5929BT3G-VF01</i>	<i>929B</i>	<i>14.25</i>	<i>15</i>	<i>15.75</i>	<i>25</i>	<i>9</i>	<i>600</i>	<i>0.25</i>	<i>1</i>	<i>11.4</i>	<i>100</i>
SZ1SMB5930BT3G-VF01	930B	15.2	16	16.8	23.4	10	600	0.25	1	12.2	93
<i>SZ1SMB5931BT3G-VF01</i>	<i>931B</i>	<i>17.1</i>	<i>18</i>	<i>18.9</i>	<i>20.8</i>	<i>12</i>	<i>650</i>	<i>0.25</i>	<i>1</i>	<i>13.7</i>	<i>83</i>
SZ1SMB5932BT3G-VF01	932B	19	20	21	18.7	14	650	0.25	1	15.2	75
SZ1SMB5933BT3G-VF01	933B	20.9	22	23.1	17	17.5	650	0.25	1	16.7	68
<i>SZ1SMB5934BT3G-VF01</i>	<i>934B</i>	<i>22.8</i>	<i>24</i>	<i>25.2</i>	<i>15.6</i>	<i>19</i>	<i>700</i>	<i>0.25</i>	<i>1</i>	<i>18.2</i>	<i>62</i>
<i>SZ1SMB5935BT3G-VF01</i>	<i>935B</i>	<i>25.65</i>	<i>27</i>	<i>28.35</i>	<i>13.9</i>	<i>23</i>	<i>700</i>	<i>0.25</i>	<i>1</i>	<i>20.6</i>	<i>55</i>
<i>SZ1SMB5936BT3G-VF01</i>	<i>936B</i>	<i>28.5</i>	<i>30</i>	<i>31.5</i>	<i>12.5</i>	<i>28</i>	<i>750</i>	<i>0.25</i>	<i>1</i>	<i>22.8</i>	<i>50</i>
SZ1SMB5937BT3G-VF01	937B	31.35	33	34.65	11.4	33	800	0.25	1	25.1	45
<i>SZ1SMB5938BT3G-VF01</i>	<i>938B</i>	<i>34.2</i>	<i>36</i>	<i>37.8</i>	<i>10.4</i>	<i>38</i>	<i>850</i>	<i>0.25</i>	<i>1</i>	<i>27.4</i>	<i>41</i>
SZ1SMB5939BT3G-VF01	939B	37.05	39	40.95	9.6	45	900	0.25	1	29.7	38
SZ1SMB5940BT3G-VF01	940B	40.85	43	45.15	8.7	53	950	0.25	1	32.7	34
SZ1SMB5941BT3G-VF01	941B	44.65	47	49.35	8	67	1000	0.25	1	35.8	31
SZ1SMB5944BT3G-VF01	944B	58.9	62	65.1	6	100	1500	0.25	1	47.1	24
SZ1SMB5945BT3G-VF01	945B	64.6	68	71.4	5.5	120	1700	0.25	1	51.7	22
<i>SZ1SMB5949BT3G-VF01</i>	<i>949B</i>	<i>95</i>	<i>100</i>	<i>105</i>	<i>3.7</i>	<i>250</i>	<i>3100</i>	<i>0.25</i>	<i>1</i>	<i>76</i>	<i>15</i>

2. **TOLERANCE AND TYPE NUMBER DESIGNATION** The type numbers listed indicate a tolerance of $\pm 5\%$.

3. **ZENER VOLTAGE (V_Z) MEASUREMENT**

Nominal Zener voltage is measured with the device junction in thermal equilibrium with ambient temperature at 25°C .

4. **ZENER IMPEDANCE (Z_Z) DERIVATION** Z_{ZT} and Z_{ZK} are measured by dividing the ac voltage drop across the device by the ac current applied. The specified limits are for $I_{Z(ac)} = 0.1 I_{Z(dc)}$ with the ac frequency = 60 Hz.

SZ1SMB59xxT3G-VF01 Series

RATING AND TYPICAL CHARACTERISTIC CURVES ($T_A = 25^\circ\text{C}$)

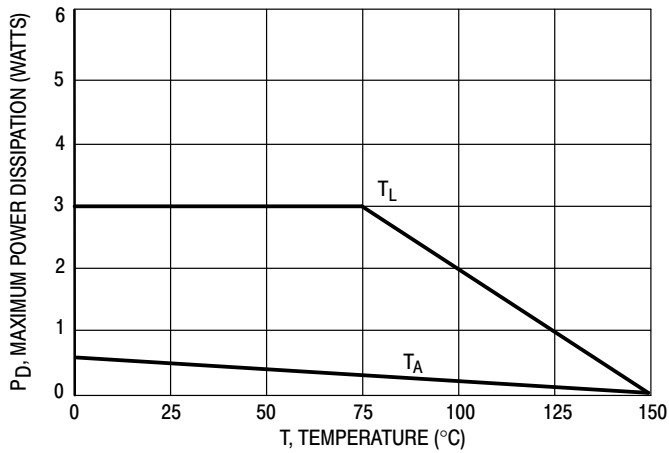


Figure 1. Steady State Power Derating

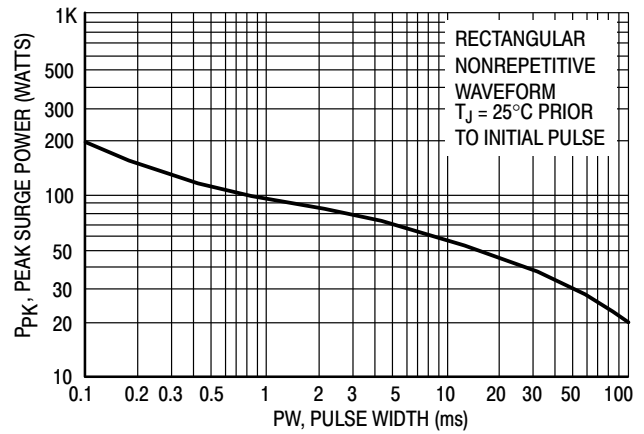


Figure 2. Maximum Surge Power

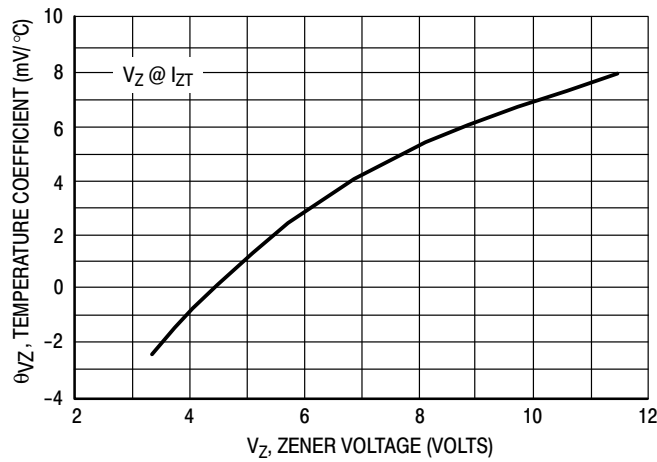


Figure 3. Zener Voltage - To 12 Volts

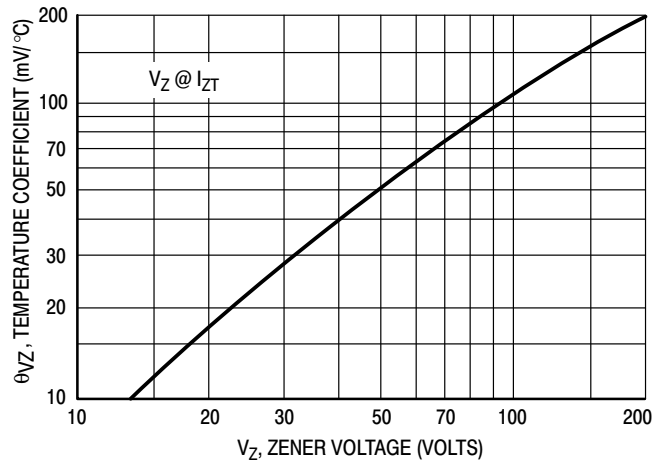


Figure 4. Zener Voltage - 14 To 200 Volts

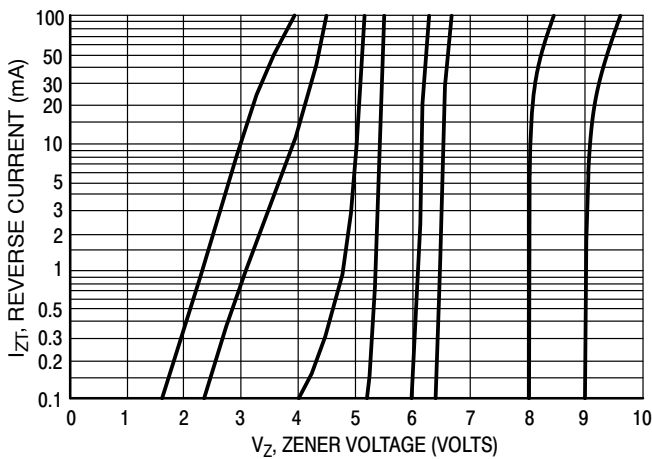


Figure 5. $V_Z = 3.3$ thru 10 Volts

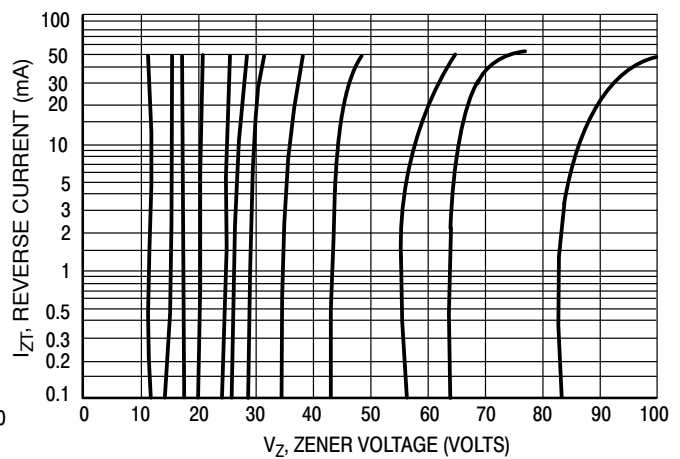


Figure 6. $V_Z = 12$ thru 82 Volts

SZ1SMB59xxT3G-VF01 Series

RATING AND TYPICAL CHARACTERISTIC CURVES ($T_A = 25^\circ\text{C}$)

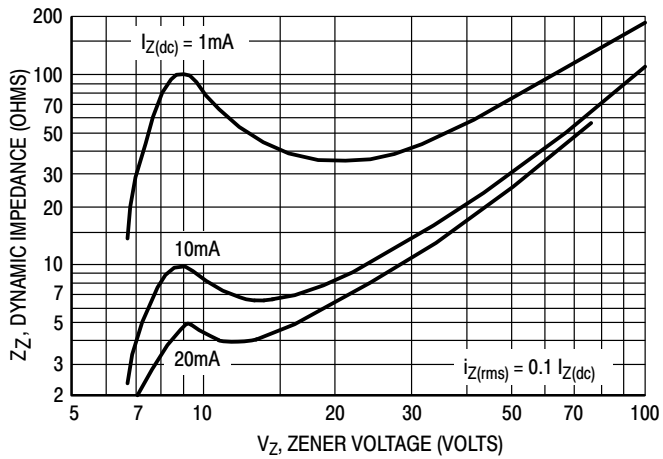


Figure 7. Effect of Zener Voltage

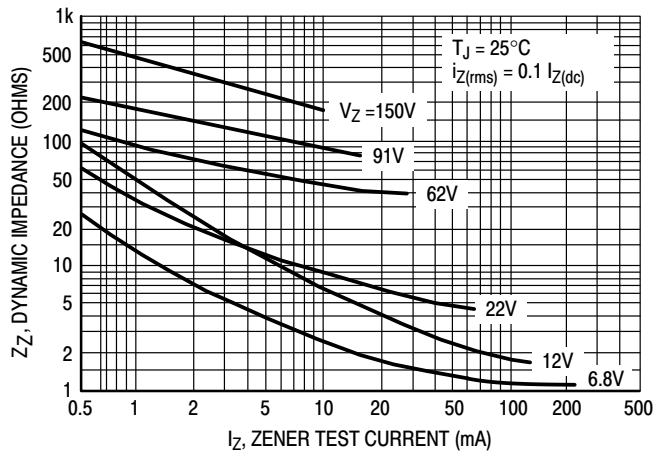


Figure 8. Effect of Zener Current

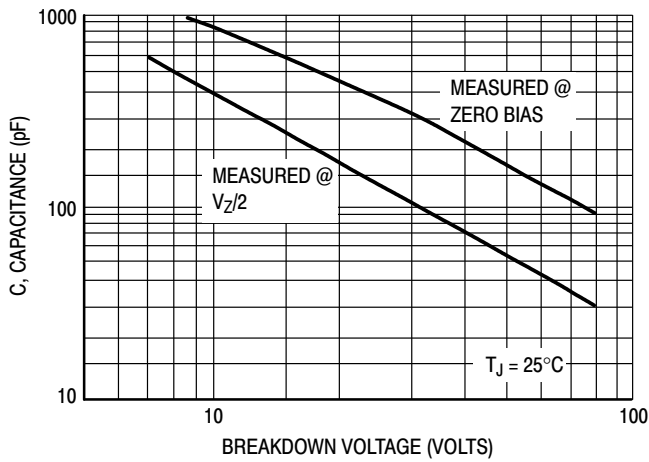


Figure 9. Capacitance Curve

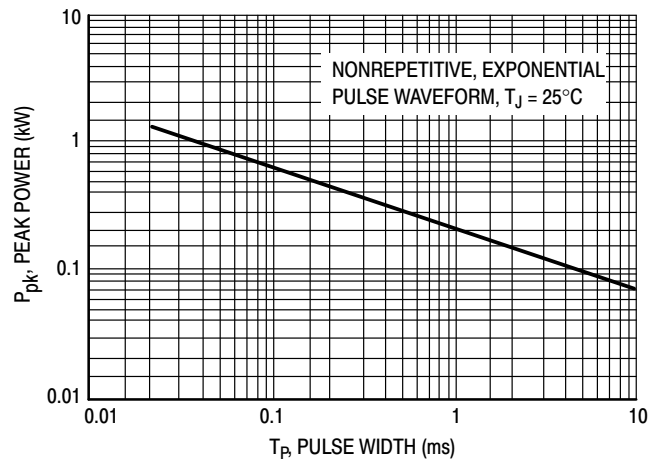


Figure 10. Typical Pulse Rating Curve

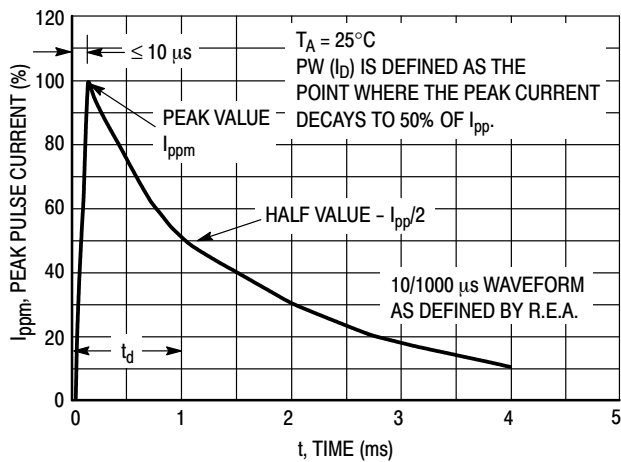


Figure 11. Pulse Waveform

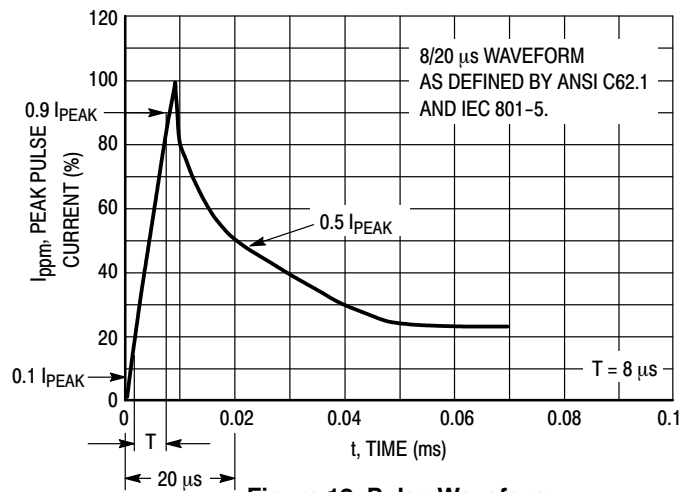


Figure 12. Pulse Waveform



SCALE 1:1

Polarity Band



SCALE 1:1


Non-Polarity Band

SMB


CASE 403A-03

ISSUE J

DATE 19 JUL 2012

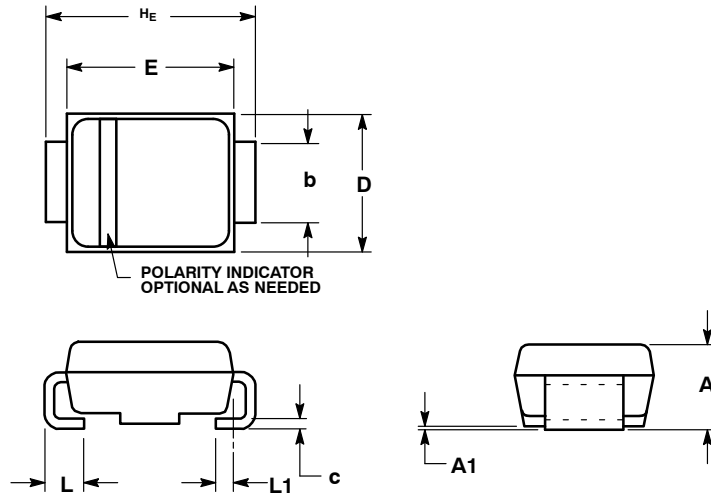

SOLDERING FOOTPRINT*

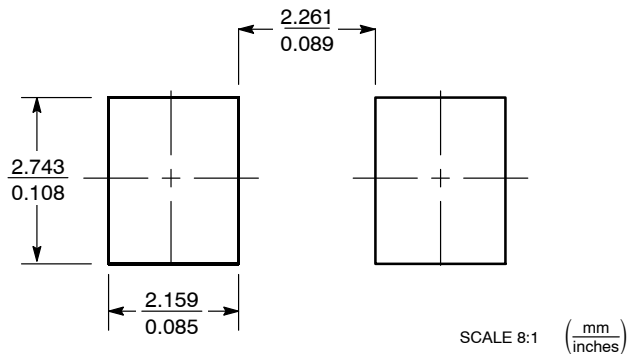


*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERM/D.

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION b SHALL BE MEASURED WITHIN DIMENSION $L1$.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.95	2.30	2.47	0.077	0.091	0.097
A1	0.05	0.10	0.20	0.002	0.004	0.008
b	1.96	2.03	2.20	0.077	0.080	0.087
c	0.15	0.23	0.31	0.006	0.009	0.012
D	3.30	3.56	3.95	0.130	0.140	0.156
E	4.06	4.32	4.60	0.160	0.170	0.181
H_E	5.21	5.44	5.60	0.205	0.214	0.220
L	0.76	1.02	1.60	0.030	0.040	0.063
L1	0.51 REF			0.020 REF		

GENERIC MARKING DIAGRAM*

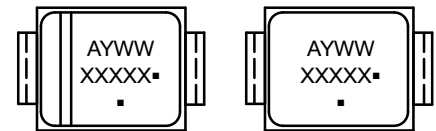

Polarity Band

Non-Polarity Band

XXXXX = Specific Device Code
 A = Assembly Location
 Y = Year
 WW = Work Week
 ▪ = Pb-Free Package

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98ASB42669B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	SMB	PAGE 1 OF 1

onsemi and **onsemi** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales