

## PYTHON Image Sensor Evaluation Kits

### Description

ON Semiconductor PYTHON Image Sensor Evaluation Kits enable customers to easily and quickly evaluate the performance of the PYTHON CMOS Image Sensors without the need to develop a full camera design. When combined with ON Semiconductor Sensor Studio II software, this hardware allows full control of the image sensor's register settings and enables video recording, still image capture, and image analysis. With this level of programmability, CMOS sensor functionality such as global shutter, very fast frame rate, high NIR sensitivity, and multiple regions of interest can be rapidly evaluated.

### Features

- Full Access to Image Sensor Register Settings
- Supports HDR Operation and ROI Readout
- USB Interface for Sensor Control, Image Capture, and Firmware Downloads
- Socketed Sensor\* for Easy Sensor Replacement
- Integrated Tripod Mount (1/4–20 thread)
- Additional Headboards (sold separately) Allow Evaluation of Multiple PYTHON Products
- Lens Mount Kit (sold separately) Provides Support for C and F Mount Lenses, Includes IR Cut Filter for Color Imaging Evaluation

### Kit Includes

- Image Capture Board with Integral Tripod Mount
- Headboard (Sensor installed & Lens Mount affixed)
- USB 3.0 Cable (2 meter length)
- Quick Start Guide

\*Not applicable to PYTHON 480 kit

### GENERAL SPECIFICATIONS

| Parameter                   | Typical Value                                      |
|-----------------------------|----------------------------------------------------|
| Hardware Interfaces         | USB 3.0, USB 2.0                                   |
| Typical Data Rate (USB 3.0) | Up to 300 Mb/sec<br>(Varies with USB Adapter used) |

### KIT SPECIFIC SPECIFICATIONS


| Evaluation Kit                                     | PYTHON 480 | PYTHON 1300 | PYTHON 5000 | PYTHON 25k |
|----------------------------------------------------|------------|-------------|-------------|------------|
| LVDS Lanes                                         | 1          | 4           | 8           | 32         |
| Max Frame Rate, Full Resolution (fps)              | 120        | 168         | 82          | 35         |
| Display Frame Rate, Full Resolution, USB 3.0 (fps) | 62         | 26          | 6.8         | 1.6        |
| On Board Buffer Capacity, Full Resolution (Frames) | 256        | 64          | 32          | 8          |
| Included Lens Mount                                | C mount    | C mount     | C mount     | F mount    |
| Compatible with Optional Lens Mount Kit            | No         | Yes         | Yes         | Yes        |



**ON Semiconductor®**

[www.onsemi.com](http://www.onsemi.com)

## EVAL BOARD USER'S MANUAL

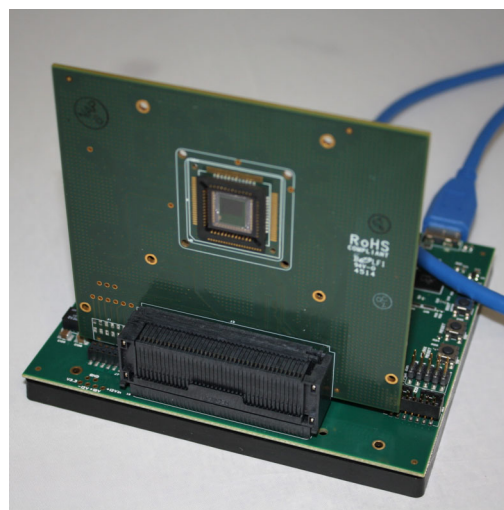

**Figure 1. PYTHON Image Sensor Evaluation Board**

**ORDERING INFORMATION**

| Part Number             | Description                                                                         | Compatible Devices<br>(Sold Separately) |
|-------------------------|-------------------------------------------------------------------------------------|-----------------------------------------|
| NOIP1SN0480A-STI-A-GEVK | PYTHON 480 (SVGA) Monochrome Image Sensor Evaluation Kit (Image Sensor Included)    | N/A                                     |
| NOIP1SE0480A-STI-A-GEVK | PYTHON 480 (SVGA) Color Image Sensor Evaluation Kit (Image Sensor Included)         | N/A                                     |
| NOIP1SN1300A-QDI-A-GEVK | PYTHON 1300 (1.3 MP) Monochrome Image Sensor Evaluation Kit (Image Sensor Included) | PYTHON 300, PYTHON 500                  |
| NOIP1SN5000A-QDI-A-GEVK | PYTHON 5000 (5.3 MP) Monochrome Image Sensor Evaluation Kit (Image Sensor Included) | PYTHON 2000 LCC                         |
| NOIP1SN025KA-GDI-A-GEVK | PYTHON 25K (26.2 MP) Monochrome Image Sensor Evaluation Kit (Image Sensor Included) | PYTHON 10K, PYTHON 12K, PYTHON 16K      |

**OPTIONAL HARDWARE ORDERING INFORMATION**

| Part Number                     | Description                                                             | Compatible Devices<br>(Sold Separately)                         |
|---------------------------------|-------------------------------------------------------------------------|-----------------------------------------------------------------|
| NOIP1SN0480A-STI-HEAD-BD-A-GEVK | PYTHON 480 Monochrome Headboard (Image Sensor Included)                 | N/A                                                             |
| NOIP1SE0480A-STI-HEAD-BD-A-GEVK | PYTHON 480 Color Headboard (Image Sensor Included)                      | N/A                                                             |
| NOIP-48PIN-HEAD-BD-A-GEVB       | 48-Pin Headboard Only (Image Sensor Not Included)                       | PYTHON 300, PYTHON 500, PYTHON 1300                             |
| NOIP-84PIN-HEAD-BD-A-GEVK       | 84-Pin Headboard Only (Image Sensor Not Included)                       | PYTHON 2000 LCC, PYTHON 5000 LCC                                |
| NOIP-355PIN-HEAD-BD-A-GEVB      | 355-Pin Headboard Only (Image Sensor Not Included)                      | PYTHON 10K, PYTHON 12K, PYTHON 16K, PYTHON 25K                  |
| LENS-MOUNT-KIT-D-GEVK           | Lens Mount Kit to Support C and F Mount Lenses (Includes IR Cut-Filter) | All PYTHON evaluation kits and headboards other than PYTHON 480 |

**REQUIRED HARDWARE AND SOFTWARE**

**Host Computer**

- 2 GHz processor, 8 GB RAM, USB 2.0 / 3.0 interface, Windows 7 and Windows 10 Operating System (64 bit)
- Sensor Studio II software. Available for [download](http://www.onsemi.com) at [www.onsemi.com](http://www.onsemi.com).

**For Maximum Speed**

- Native USB 3.0 chipset

**Other (User Supplied)**

- +12 VDC, 2 Amp, power supply with 2.1 mm center positive DC jack
- Camera lens
- IR cut filter (required for evaluating color image sensors)
- Table-top tripod (optional)

All brand names and product names appearing in this document are registered trademarks or trademarks of their respective holders.

**onsemi**, **onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and will only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

**THE BOARD IS PROVIDED BY ONSEMI TO YOU "AS IS" AND WITHOUT ANY REPRESENTATIONS OR WARRANTIES WHATSOEVER. WITHOUT LIMITING THE FOREGOING, ONSEMI (AND ITS LICENSORS/SUPPLIERS) HEREBY DISCLAIMS ANY AND ALL REPRESENTATIONS AND WARRANTIES IN RELATION TO THE BOARD, ANY MODIFICATIONS, OR THIS AGREEMENT, WHETHER EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION ANY AND ALL REPRESENTATIONS AND WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, AND THOSE ARISING FROM A COURSE OF DEALING, TRADE USAGE, TRADE CUSTOM OR TRADE PRACTICE.**

**onsemi** reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by **onsemi** shall not constitute any representation or warranty by **onsemi**, and no additional obligations or liabilities shall arise from **onsemi** having provided such information or services.

**onsemi** products including the boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. You agree to indemnify, defend and hold harmless **onsemi**, its directors, officers, employees, representatives, agents, subsidiaries, affiliates, distributors, and assigns, against any and all liabilities, losses, costs, damages, judgments, and expenses, arising out of any claim, demand, investigation, lawsuit, regulatory action or cause of action arising out of or associated with any unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of any products and/or the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

**FCC WARNING** – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by **onsemi** to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

**onsemi** does not convey any license under its patent rights nor the rights of others.

**LIMITATIONS OF LIABILITY:** **onsemi** shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if **onsemi** is advised of the possibility of such damages. In no event shall **onsemi**'s aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

The board is provided to you subject to the license and other terms per **onsemi**'s standard terms and conditions of sale. For more information and documentation, please visit [www.onsemi.com](http://www.onsemi.com).

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)