**ON Semiconductor** 

Is Now

# Onsemi

To learn more about onsemi<sup>™</sup>, please visit our website at <u>www.onsemi.com</u>

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product factures, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and asfety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or by customer's technical experts. onsemi products and actal performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiari

Preferred Device

# General Purpose Transistors

# **PNP Silicon**

#### Features

• Pb-Free Packages are Available\*

#### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector – Emitter Voltage	V <sub>CEO</sub>	40	Vdc
Collector – Base Voltage	V <sub>CBO</sub>	40	Vdc
Emitter – Base Voltage	V <sub>EBO</sub>	5.0	Vdc
Collector Current – Continuous	۱ <sub>C</sub>	600	mAdc
Total Device Dissipation @ $T_A = 25^{\circ}C$ Derate above 25°C	P <sub>D</sub>	625 5.0	mW mW/⁰C
Total Device Dissipation @ $T_C = 25^{\circ}C$ Derate above 25°C	PD	1.5 12	W mW/°C
Operating and Storage Junction Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C

#### THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	200	°C/W
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	83.3	°C/W


Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.




# **ON Semiconductor®**

http://onsemi.com





### MARKING DIAGRAM



2N4403= Device CodeA= Assembly LocationY= YearWW= Work Week•= Pb-Free Package

(Note: Microdot may be in either location)

#### **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

Preferred devices are recommended choices for future

use and best overall value.

\*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# **ELECTRICAL CHARACTERISTICS** ( $T_A = 25^{\circ}C$ unless otherwise noted)

Characteristic			Symbol	Min	Max	Unit
OFF CHARACTERISTICS					•	•
Collector-Emitter Breakdowr	Voltage (Note 1)	$(I_{C} = 1.0 \text{ mAdc}, I_{B} = 0)$	V <sub>(BR)CEO</sub>	40	-	Vdc
Collector-Base Breakdown \	/oltage	$(I_{C} = 0.1 \text{ mAdc}, I_{E} = 0)$	V <sub>(BR)CBO</sub>	40	-	Vdc
Emitter-Base Breakdown Voltage		$(I_E = 0.1 \text{ mAdc}, I_C = 0)$	V <sub>(BR)EBO</sub>	5.0	-	Vdc
Base Cutoff Current		(V <sub>CE</sub> = 35 Vdc, V <sub>EB</sub> = 0.4 Vdc)		_	0.1	μAdc
Collector Cutoff Current		(V <sub>CE</sub> = 35 Vdc, V <sub>EB</sub> = 0.4 Vdc)	I <sub>CEX</sub>	_	0.1	μAdc
ON CHARACTERISTICS						
DC Current Gain			hFE	30 60 100 100 20	_ _ 300 _	_
Collector-Emitter Saturation	Voltage (Note 1)	$(I_C = 150 \text{ mAdc}, I_B = 15 \text{ mAdc})$ $(I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc})$	V <sub>CE(sat)</sub>	-	0.4 0.75	Vdc
$ \begin{array}{ll} \text{Base-Emitter Saturation Voltage (Note 1)} & (I_C = 150 \text{ mAdc}, I_B = 15 \text{ mAdc}) \\ (I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc}) \end{array} $		V <sub>BE(sat)</sub>	0.75	0.95 1.3	Vdc	
SMALL-SIGNAL CHARACT	ERISTICS					
Current-Gain - Bandwidth P	roduct (	I <sub>C</sub> = 20 mAdc, V <sub>CE</sub> = 10 Vdc, f = 100 MHz)	f <sub>T</sub>	200	-	MHz
Collector-Base Capacitance		(V <sub>CB</sub> = 10 Vdc, I <sub>E</sub> = 0, f = 1.0 MHz)	C <sub>cb</sub>	_	8.5	pF
Emitter-Base Capacitance		$(V_{EB} = 0.5 \text{ Vdc}, I_{C} = 0, f = 1.0 \text{ MHz})$	C <sub>eb</sub>	_	30	pF
Input Impedance (		(I <sub>C</sub> = 1.0 mAdc, V <sub>CE</sub> = 10 Vdc, f = 1.0 kHz)	h <sub>ie</sub>	1.5 k	15 k	Ω
Voltage Feedback Ratio (		(I <sub>C</sub> = 1.0 mAdc, V <sub>CE</sub> = 10 Vdc, f = 1.0 kHz)	h <sub>re</sub>	0.1	8.0	X 10 <sup>-4</sup>
Small–Signal Current Gain (		(I <sub>C</sub> = 1.0 mAdc, V <sub>CE</sub> = 10 Vdc, f = 1.0 kHz)	h <sub>fe</sub>	60	500	-
Output Admittance		(I <sub>C</sub> = 1.0 mAdc, V <sub>CE</sub> = 10 Vdc, f = 1.0 kHz)	h <sub>oe</sub>	1.0	100	μmhos
SWITCHING CHARACTERIS	STICS					
Delay Time	(V <sub>CC</sub> = 30 Vdc, V <sub>BE</sub> = +2.0 Vdc, I <sub>C</sub> = 150 mAdc, I <sub>B1</sub> = 15 mAdc)		t <sub>d</sub>	_	15	ns
Rise Time			t <sub>r</sub>	_	20	ns
Storage Time	(V <sub>CC</sub> = 30 Vdc, I <sub>C</sub> = 150 mAdc,		t <sub>s</sub>	_	225	ns
Fall Time	$I_{B1} = 15 \text{ mA}, I_{B2} =$	= 15 mA)	t <sub>f</sub>	_	30	ns


1. Pulse Test: Pulse Width  $\leq$  300 µs, Duty Cycle  $\leq$  2.0%.


#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
2N4403	TO-92	5000 Units / Bulk
2N4403G	TO-92 (Pb-Free)	5000 Units / Bulk
2N4403RLRA	TO-92	2000 / Tape & Reel
2N4403RLRAG	TO-92 (Pb-Free)	2000 / Tape & Reel
2N4403RLRM	TO-92	2000 / Ammo Pack
2N4403RLRMG	TO-92 (Pb-Free)	2000 / Ammo Pack
2N4403RLRPG	TO–92 (Pb–Free)	2000 / Ammo Pack

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

## SWITCHING TIME EQUIVALENT TEST CIRCUIT

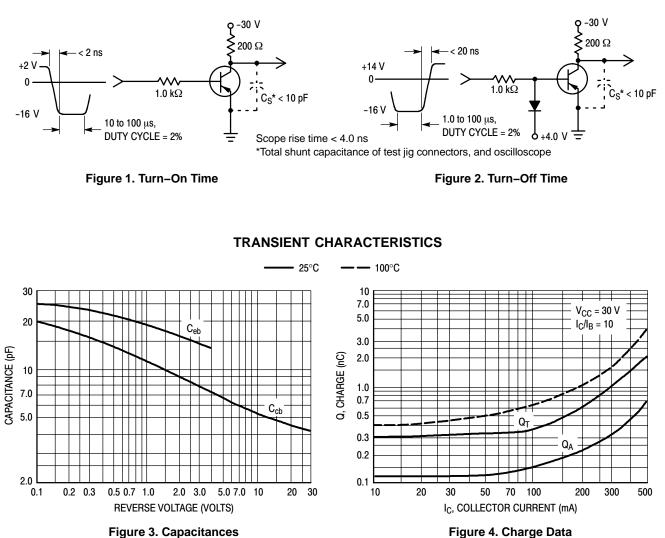

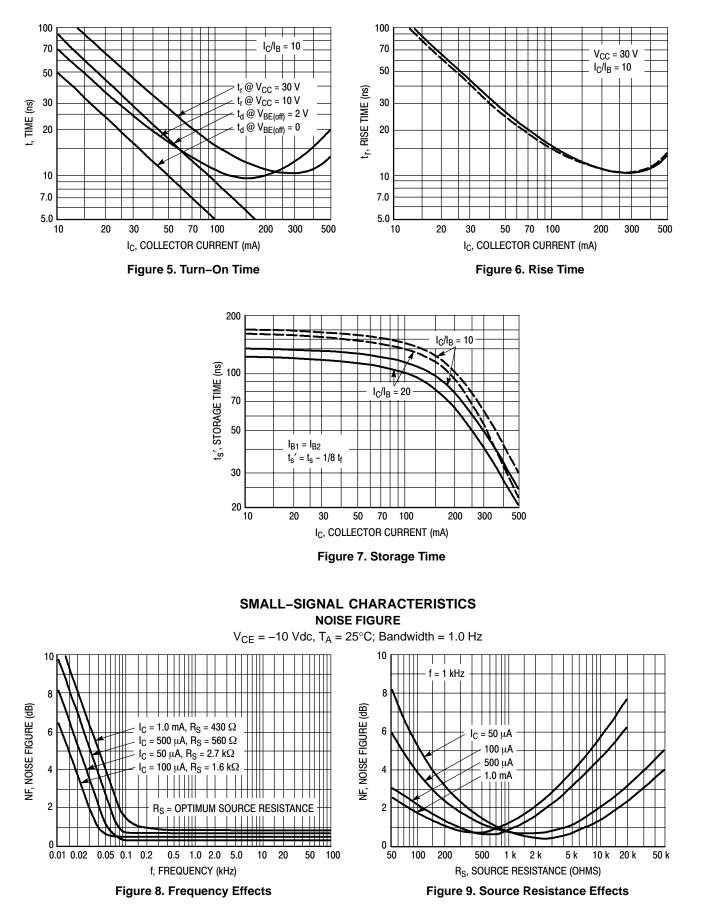

#### h PARAMETERS

 $V_{CE} = -10 \text{ Vdc}, \text{ f} = 1.0 \text{ kHz}, \text{ } \text{T}_{\text{A}} = 25^{\circ}\text{C}$ 

This group of graphs illustrates the relationship between  $h_{fe}$  and other "h" parameters for this series of transistors. To obtain these curves, a high–gain and a low–gain unit were

selected from the 2N4403 lines, and the same units were used to develop the correspondingly–numbered curves on each graph.


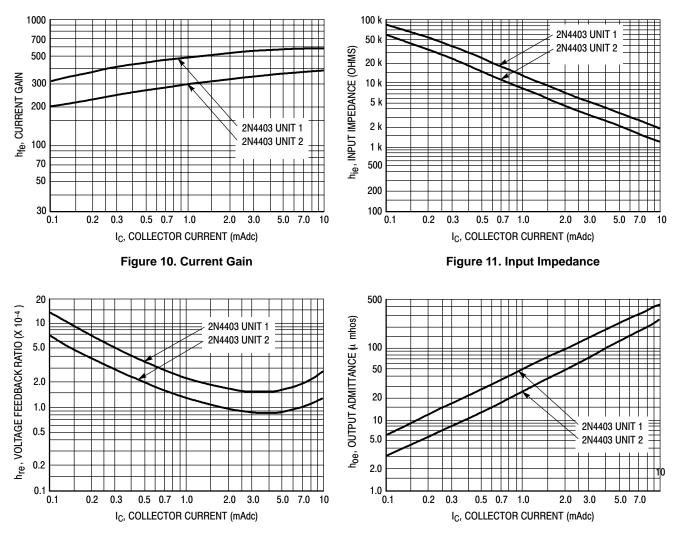


Figure 12. Voltage Feedback Ratio


Figure 13. Output Admittance



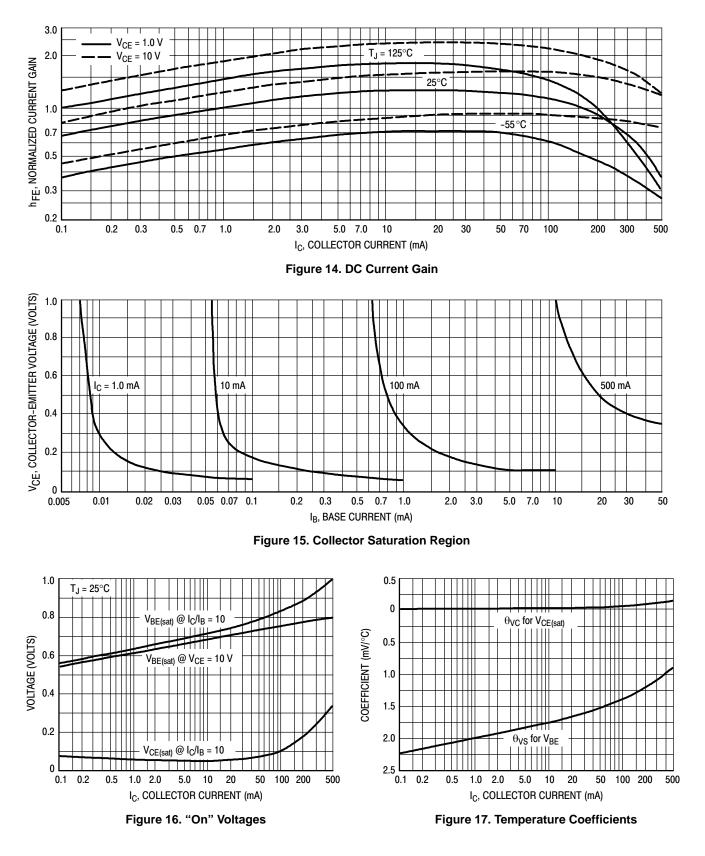

#### PACKAGE DIMENSIONS

TO-92 (TO-226) CASE 29-11 ISSUE AM

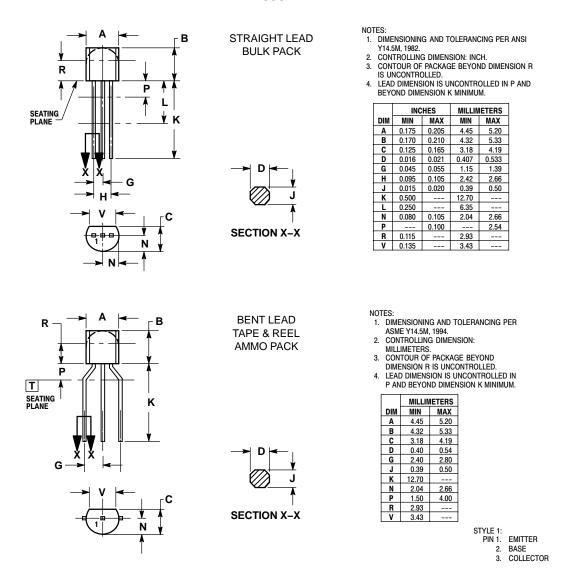

ON Semiconductor and I are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application intended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC was negligent regarding the design or manufacture of the part. SCILLC and its officers, employee. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81–3–5773–3850 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative