

# Is Now Part of



# ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="general-regarding-numbers-n

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



March 1995 Revised June 2002

# 74LCX16500

# Low Voltage 18-Bit Universal Bus Transceivers with 5V Tolerant Inputs and Outputs

# **General Description**

These 18-bit universal bus transceivers combine D-type latches and D-type flip-flops to allow data flow in transparent, latched, and clocked modes.

Data flow in <u>each</u> direction is controlled by output-enable (OEAB and <u>OEBA</u>), latch-enable (LEAB and LEBA), and clock (<u>CLKAB</u> and <u>CLKBA</u>) inputs.

The LCX16500 is designed for low voltage (2.5V or 3.3V)  $V_{CC}$  applications with the capability of interfacing to a 5V signal environment.

The LCX16500 is fabricated with an advanced CMOS technology to achieve high speed operation while maintaining CMOS low power.

#### **Features**

- 5V tolerant inputs and outputs
- 2.3V-3.6V V<sub>CC</sub> specifications provided
- $\blacksquare$  6.0 ns t<sub>PD</sub> max (V<sub>CC</sub> = 3.3V), 20  $\mu$ A I<sub>CC</sub> max
- Power down high impedance inputs and outputs
- Supports live insertion/withdrawal (Note 1)
- $\pm$ 24 mA output drive ( $V_{CC} = 3.0V$ )
- Uses proprietary noise/EMI reduction circuitry
- Latch-up performance exceeds 500 mA
- ESD performance:

Human body model > 2000V

Machine model > 200V

■ Also packaged in plastic Fine-Pitch Ball Grid Array (FBGA)

**Note 1:** To ensure the high-impedance state during power up or down,  $\overline{\text{OE}}$  should be tied to  $V_{CC}$  and  $\overline{\text{OE}}$  tied to GND through a resistor: the minimum value or the resistor is determined by the current-sourcing capability of the driver.

# **Ordering Code:**


Order Number	Package Number	Package Description
74LCX16500G (Note 2)(Note 3)	BGA54A	54-Ball Fine-Pitch Ball Grid Array (FBGA), JEDEC MO-205, 5.5mm Wide
74LCX16500MEA (Note 3)	MS56A	56-Lead Shrink Small Outline Package (SSOP), JEDEC MO-118, 0.300" Wide
74LCX16500MTD (Note 3)	MTD56	56-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide

Note 2: Ordering code "G" indicates Trays.


Note 3: Devices also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

# **Connection Diagrams**

#### Pin Assignment for SSOP and TSSOP

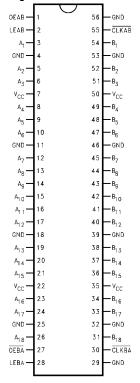

#### Pin Assignment for FBGA



(Top Thru View)

# **Pin Descriptions**

Pin Names	Description
A <sub>1</sub> - A <sub>18</sub>	Data Register A Inputs/3-STATE Outputs
B <sub>1</sub> - B <sub>18</sub>	Data Register B Inputs/3-STATE Outputs
CLKAB, CLKBA	Clock Pulse Inputs
LEAB, LEBA	Latch Enable Inputs
OEBA, OEBA	Output Enable Inputs

# **FBGA Pin Assignments**

	1	2	3	4	5	6
Α	A <sub>2</sub>	A <sub>1</sub>	OEAB	GND	B <sub>1</sub>	B <sub>2</sub>
В	A <sub>4</sub>	$A_3$	LEAB	CLKAB	B <sub>3</sub>	B <sub>4</sub>
С	A <sub>6</sub>	A <sub>5</sub>	V <sub>CC</sub>	V <sub>CC</sub>	B <sub>5</sub>	В <sub>6</sub>
D	A <sub>8</sub>	A <sub>7</sub>	GND	GND	B <sub>7</sub>	B <sub>8</sub>
Е	A <sub>10</sub>	A <sub>9</sub>	GND	GND	B <sub>9</sub>	B <sub>10</sub>
F	A <sub>12</sub>	A <sub>11</sub>	GND	GND	B <sub>11</sub>	B <sub>12</sub>
G	A <sub>14</sub>	A <sub>13</sub>	V <sub>CC</sub>	V <sub>CC</sub>	B <sub>13</sub>	B <sub>14</sub>
Н	A <sub>16</sub>	A <sub>15</sub>	OEBA	CLKBA	B <sub>15</sub>	B <sub>16</sub>
J	A <sub>17</sub>	A <sub>18</sub>	LEBA	GND	B <sub>18</sub>	B <sub>17</sub>

#### Truth Table (Note 4)

	Inputs				
OEAB	LEAB	CLKAB	An	B <sub>n</sub>	
L	Х	Χ	Х	Z	
Н	Н	Χ	L	L	
Н	Н	Χ	Н	Н	
Н	L	$\downarrow$	L	L	
Н	L	$\downarrow$	Н	Н	
Н	L	Н	Χ	B <sub>0</sub> (Note 5)	
Н	L	L	Χ	B <sub>0</sub> (Note 6)	

Note 4: A-to-B data flow is shown: B-to-A flow is similar but uses OEBA, LEBA, and CLKBA.

Note 5: Output level before the indicated steady-state input conditions

Note 6: Output level before the indicated steady-state input conditions were established, provided that \$\overline{CLKAB}\$ was LOW before LEAB went LOW.

#### **Functional Description**

For A-to-B data flow, the LCX16500 operates in the transparent mode when LEAB is HIGH. When LEAB is LOW, the A data is latched if CLKAB is held at a HIGH or LOW logic level. If LEAB is LOW, the A bus data is stored in the latch/flip-flop on the HIGH-to-LOW transition of CLKAB. Output-enable OEAB is active-HIGH. When OEAB is HIGH, the outputs are active. When OEAB is LOW, the outputs are in the high impedance state.

 $\overline{\text{DBA}}$  flow for B to  $\overline{\text{A}}$  is similar to that of A to B but uses  $\overline{\text{OEBA}}$ , LEBA, and  $\overline{\text{CLKBA}}$ . The output enables are complementary (OEAB is active HIGH and  $\overline{\text{OEBA}}$  is active LOW).

# **Logic Diagram** To 17 Other Channels

# **Absolute Maximum Ratings**(Note 7)

Symbol	Parameter	Value	Conditions	Units
V <sub>CC</sub>	Supply Voltage	-0.5 to +7.0		V
VI	DC Input Voltage	-0.5 to +7.0		V
Vo	DC Output Voltage	-0.5 to +7.0	Output in 3-STATE	V
		$-0.5$ to $V_{CC} + 0.5$	Output in HIGH or LOW State (Note 8)	V
I <sub>IK</sub>	DC Input Diode Current	-50	V <sub>I</sub> < GND	mA
I <sub>OK</sub>	DC Output Diode Current	-50	V <sub>O</sub> < GND	mA
		+50	$V_O > V_{CC}$	IIIA
I <sub>O</sub>	DC Output Source/Sink Current	±50		mA
I <sub>CC</sub>	DC Supply Current per Supply Pin	±100		mA
I <sub>GND</sub>	DC Ground Current per Ground Pin	±100		mA
T <sub>STG</sub>	Storage Temperature	-65 to +150		°C

# **Recommended Operating Conditions**

(Note 9)

Symbol	Parameter		Min	Max	Units
V <sub>CC</sub>	Supply Voltage	Operating	2.0	3.6	V
		Data Retention	1.5	3.6	V
VI	Input Voltage		0	5.5	V
Vo	Output Voltage	HIGH or LOW State	0	V <sub>CC</sub>	V
		3-STATE	0	5.5	V
I <sub>OH</sub> /I <sub>OL</sub>	Output Current	$V_{CC} = 3.0V - 3.6V$		±24	
		$V_{CC} = 3.0V - 3.6V$ $V_{CC} = 2.7V - 3.0V$		±12	mA
		$V_{CC} = 2.3V - 2.7V$		±8	
T <sub>A</sub>	Free-Air Operating Temperature		-40	85	°C
Δt/ΔV	Input Edge Rate, V <sub>IN</sub> = 0.8V-2.0V, V <sub>CC</sub> = 3.0V		0	10	ns/V

Note 7: The Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the Absolute Maximum Ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 8: I<sub>O</sub> Absolute Maximum Rating must be observed.

Note 9: Unused (inputs or I/O's) must be held HIGH or LOW. They may not float.

#### **DC Electrical Characteristics**

Symbol	Parameter	Conditions	V <sub>CC</sub>	$T_A = -40^{\circ}C$ to $+85^{\circ}C$		Units
		Conditions	(V)	Min	Max	Ullits
V <sub>IH</sub>	HIGH Level Input Voltage		2.3 – 2.7	1.7		V
			2.7 – 3.6	2.0		V
$V_{IL}$	LOW Level Input Voltage		2.3 – 2.7		0.7	V
			2.7 – 3.6		8.0	V
V <sub>OH</sub>	HIGH Level Output Voltage	I <sub>OH</sub> = -100 μA	2.3 – 3.6	V <sub>CC</sub> - 0.2		
		$I_{OH} = -8 \text{ mA}$	2.3	1.8		
		I <sub>OH</sub> = -12 mA	2.7	2.2		V
		$I_{OH} = -18 \text{ mA}$	3.0	2.4		
		$I_{OH} = -24 \text{ mA}$	3.0	2.2		
V <sub>OL</sub>	LOW Level Output Voltage	$I_{OL} = 100 \mu A$	2.3 – 3.6		0.2	
		I <sub>OL</sub> = 8 mA	2.3		0.6	
		$I_{OL} = 12 \text{ mA}$	2.7		0.4	V
		$I_{OL} = 16 \text{ mA}$	3.0		0.4	
		I <sub>OL</sub> = 24 mA	3.0		0.55	
l <sub>l</sub>	Input Leakage Current	$0 \le V_1 \le 5.5V$	2.3 – 3.6		±5.0	μΑ
l <sub>OZ</sub>	3-STATE I/O Leakage	0 ≤ V <sub>O</sub> ≤ 5.5V	2.3 – 3.6		±5.0	A
		$V_I = V_{IH}$ or $V_{IL}$	2.3 – 3.0		±3.0	μΑ
I <sub>OFF</sub>	Power-Off Leakage Current	$V_I$ or $V_O = 5.5V$	0		10	μΑ

# DC Electrical Characteristics (Continued)

Symbol Parameter		Conditions	V <sub>CC</sub>	T <sub>A</sub> = -40°0	C to +85°C	Units
Symbol	T diamotor	Conditions	(V)	Min	Max	Oilles
I <sub>CC</sub>	Quiescent Supply Current	$V_I = V_{CC}$ or GND	2.3 – 3.6		20	μА
		3.6V ≤ V <sub>I</sub> , V <sub>O</sub> ≤ 5.5V (Note 10)	2.3 – 3.6		±20	μΛ
$\Delta I_{CC}$	Increase in I <sub>CC</sub> per Input	$V_{IH} = V_{CC} - 0.6V$	2.3 - 3.6		500	μΑ

Note 10: Outputs disabled or 3-STATE only.

# **AC Electrical Characteristics**

		$T_A = -40$ °C to $+85$ °C, $R_L = 500 \Omega$						
0	Parameter	V <sub>CC</sub> = 3.	3V ± 0.3V	V <sub>CC</sub>	= 2.7V	$V_{CC}=2$ .	5V ± 0.2V	Units
Symbol	Parameter	C <sub>L</sub> =	50 pF	C <sub>L</sub> =	50 pF	C <sub>L</sub> =	30 pF	Units
		Min	Max	Min	Max	Min	Max	
f <sub>MAX</sub>	Maximum Clock Frequency	170						MHz
t <sub>PHL</sub>	Propagation Delay	1.5	6.0	1.5	7.0	1.5	7.2	ns
t <sub>PLH</sub>	Bus to Bus	1.5	6.0	1.5	7.0	1.5	7.2	115
t <sub>PHL</sub>	Propagation Delay	1.5	6.7	1.5	8.0	1.5	8.4	
t <sub>PLH</sub>	Clock to Bus	1.5	6.7	1.5	8.0	1.5	8.4	ns
t <sub>PHL</sub>	Propagation Delay	1.5	7.0	1.5	8.0	1.5	8.4	
t <sub>PLH</sub>	LE to Bus	1.5	7.0	1.5	8.0	1.5	8.4	ns
t <sub>PZL</sub>	Output Enable Time	1.5	7.2	1.5	8.2	1.5	9.4	ns
$t_{PZH}$		1.5	7.2	1.5	8.2	1.5	9.4	115
t <sub>PLZ</sub>	Output Disable Time	1.5	7.0	1.5	8.0	1.5	8.4	
$t_{PHZ}$		1.5	7.0	1.5	8.0	1.5	8.4	ns
t <sub>S</sub>	Setup Time	2.5		2.5		3.0		ns
t <sub>H</sub>	Hold Time	1.5		1.5		2.0		ns
t <sub>W</sub>	Pulse Width	3.0		3.0		3.5		ns
toshl	Output to Output Skew		1.0					no
t <sub>OSLH</sub>	(Note 11)		1.0					ns

Note 11: Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>), or LOW-to-HIGH (t<sub>OSLH</sub>).

# **Dynamic Switching Characteristics**

Symbol	Parameter	Conditions	v <sub>cc</sub>	T <sub>A</sub> = 25°C	Units
Syllibol	r arameter	Conditions	(V)	Typical	Omits
V <sub>OLP</sub>	Quiet Output Dynamic Peak V <sub>OL</sub>	$C_L = 50 \text{ pF}, V_{IH} = 3.3 \text{V}, V_{IL} = 0 \text{V}$	3.3	0.8	V
		$C_L = 30$ pF, $V_{IH} = 2.5$ V, $V_{IL} = 0$ V	2.5	0.6	v
V <sub>OLV</sub>	Quiet Output Dynamic Valley V <sub>OL</sub>	$C_L = 50 \text{ pF}, V_{IH} = 3.3 \text{V}, V_{IL} = 0 \text{V}$	3.3	-0.8	V
		$C_L = 30 \text{ pF}, V_{IH} = 2.5 \text{V}, V_{IL} = 0 \text{V}$	2.5	-0.6	V

# Capacitance

Symbol	Parameter	Conditions	Typical	Units
C <sub>IN</sub>	Input Capacitance	$V_{CC}$ = Open, $V_I$ = 0V or $V_{CC}$	7	pF
C <sub>I/O</sub>	Input/Output Capacitance	$V_{CC} = 3.3V$ , $V_I = 0V$ or $V_{CC}$	8	pF
C <sub>PD</sub>	Power Dissipation Capacitance	$V_{CC} = 3.3V$ , $V_{I} = 0V$ or $V_{CC}$ , $f = 10$ MHz	20	pF

# AC LOADING and WAVEFORMS Generic for LCX Family






FIGURE 1. AC Test Circuit ( $C_L$  includes probe and jig capacitance)


Test	Switch
t <sub>PLH</sub> , t <sub>PHL</sub>	Open
t <sub>PZL</sub> , t <sub>PLZ</sub>	6V at $V_{CC}$ = 3.3 $\pm$ 0.3V, and 2.7V $V_{CC}$ x 2 at $V_{CC}$ = 2.5 $\pm$ 0.2V
$t_{PZH}, t_{PHZ}$	GND




**Waveform for Inverting and Non-Inverting Functions** 




3-STATE Output High Enable and Disable Times for Logic



Propagation Delay. Pulse Width and  $t_{\text{rec}}$  Waveforms



Setup Time, Hold Time and Recovery Time for Logic



3-STATE Output Low Enable and Disable Times for Logic







FIGURE 2. Waveforms (Input Characteristics; f =1MHz,  $t_r = t_f = 3ns$ )

Symbol	V <sub>cc</sub>		
	3.3V $\pm$ 0.3V	2.7V	2.5V ± 0.2V
V <sub>mi</sub>	1.5V	1.5V	V <sub>CC</sub> /2
V <sub>mo</sub>	1.5V	1.5V	V <sub>CC</sub> /2
V <sub>x</sub>	V <sub>OL</sub> + 0.3V	V <sub>OL</sub> + 0.3V	V <sub>OL</sub> + 0.15V
V <sub>y</sub>	V <sub>OH</sub> – 0.3V	V <sub>OH</sub> – 0.3V	V <sub>OH</sub> – 0.15V

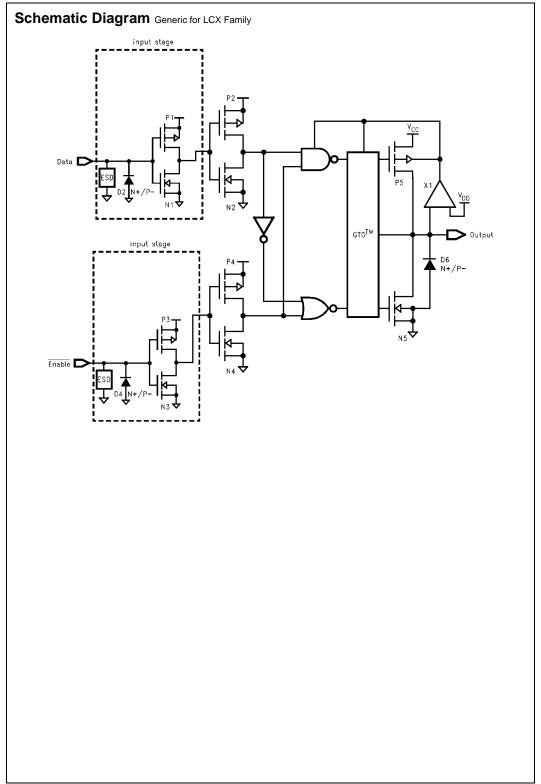

# Physical Dimensions inches (millimeters) unless otherwise noted

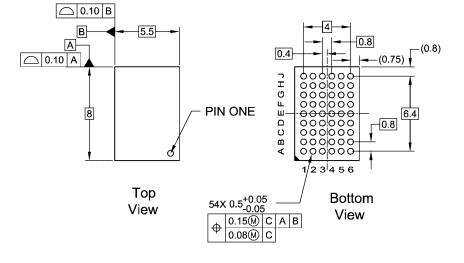





#### NOTES:

- A. THIS PACKAGE CONFORMS TO JEDEC M0-205
- **B. ALL DIMENSIONS IN MILLIMETERS**
- C. LAND PATTERN RECOMMENDATION: NSMD (Non Solder Mask Defined)
  .35MM DIA PADS WITH A SOLDERMASK OPENING OF .45MM CONCENTRIC TO PADS
  D. DRAWING CONFORMS TO ASME Y14.5M-1994

#### BGA54ArevD

54-Ball Fine-Pitch Ball Grid Array (FBGA), JEDEC MO-205, 5.5mm Wide Package Number BGA54A

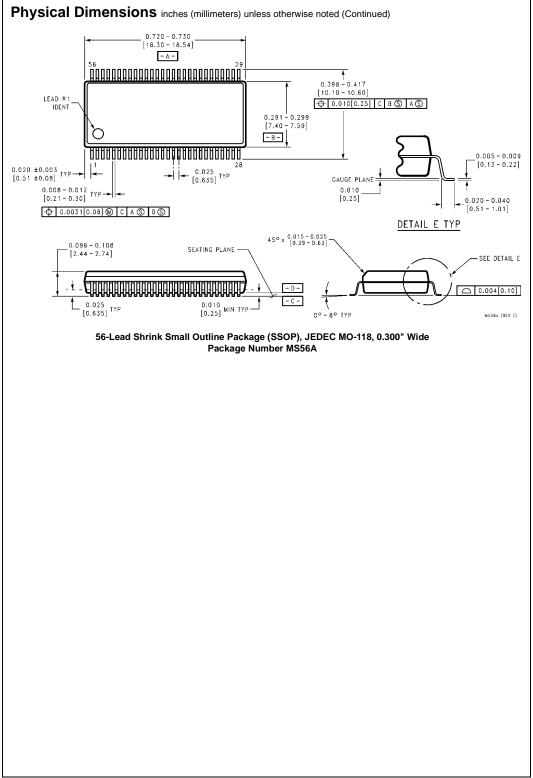

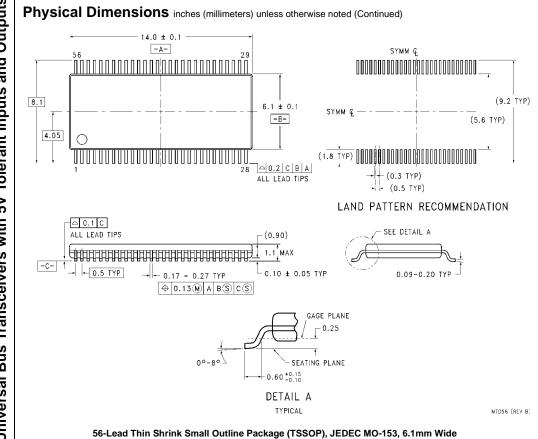

56-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide Package Number MTD56

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative