# BAS16H

# **Switching Diode**

#### **Features**

- S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

## **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Continuous Reverse Voltage	$V_R$	100	V
Peak Forward Current	lF	200	mA
Non-Repetitive Peak Forward Surge Current, 60 Hz	I <sub>FSM(surge)</sub>	1.8	Α
Repetitive Peak Forward Current (Note 2)	I <sub>FRM</sub>	1.0	Α
Non-Repetitive Peak Forward Current (Square Wave, $T_J = 25^{\circ}C$ prior to surge) $t = 1 \mu s$ $t = 10 \mu s$ $t = 100 \mu s$ $t = 1 ms$ $t = 10 ms$ $t = 100 ms$ $t = 1 s$	I <sub>FSM</sub>	36.0 18.0 6.0 3.0 1.8 1.3	A

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board (Note 1)  T <sub>A</sub> = 25°C  Derate above 25°C	P <sub>D</sub>	200 1.57	mW mW/°C
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	635	°C/W
Junction and Storage Temperature	T <sub>J</sub> , T <sub>stg</sub>	–55 to 150	°C

- 1. FR-4 Minimum Pad.
- 2. Square Wave, f = 40 kHz, PW = 200 ns Test Duration = 60 s, T<sub>J</sub> = 25°C prior to surge.



# ON Semiconductor®

#### www.onsemi.com





SOD-323 CASE 477 STYLE 1

#### MARKING DIAGRAM



A6 = Specific Device Code M = Date Code

#### **ORDERING INFORMATION**


Device	Package	Shipping†
BAS16HT1G	SOD-323 (Pb-Free)	3000 / Tape & Reel
SBAS16HT1G	SOD-323 (Pb-Free)	3000 /T ape & Reel
BAS16HT3G	SOD-323 (Pb-Free)	10000 / Tape & Reel
SBAS16HT3G	SOD-323 (Pb-Free)	10000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

**ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS	<u>.</u>			
Reverse Voltage Leakage Current $(V_R = 100 \text{ Vdc})$ $(V_R = 75 \text{ Vdc}, T_J = 150^{\circ}\text{C})$ $(V_R = 25 \text{ Vdc}, T_J = 150^{\circ}\text{C})$	I <sub>R</sub>	- - -	1.0 50 30	μAdc
Reverse Breakdown Voltage (I <sub>BR</sub> = 100 μAdc)	V <sub>(BR)</sub>	100	-	Vdc
Forward Voltage $(I_F = 1.0 \text{ mAdc})$ $(I_F = 10 \text{ mAdc})$ $(I_F = 50 \text{ mAdc})$ $(I_F = 150 \text{ mAdc})$	V <sub>F</sub>	- - -	715 855 1000 1250	mV
Diode Capacitance (V <sub>R</sub> = 0, f = 1.0 MHz)	C <sub>D</sub>	-	2.0	pF
Forward Recovery Voltage (I <sub>F</sub> = 10 mAdc, t <sub>r</sub> = 20 ns)	V <sub>FR</sub>	-	1.75	Vdc
Reverse Recovery Time $(I_F = I_R = 10 \text{ mAdc}, R_L = 50 \Omega)$	t <sub>rr</sub>	-	6.0	ns
Stored Charge (I <sub>F</sub> = 10 mAdc to $V_R$ = 5.0 Vdc, $R_L$ = 500 $\Omega$ )	Q <sub>S</sub>	-	45	pC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

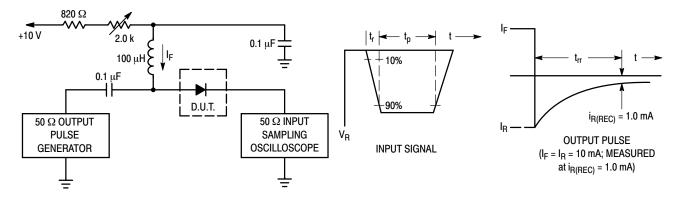

Notes: 1. A 2.0  $k\Omega$  variable resistor adjusted for a Forward Current (I<sub>F</sub>) of 10 mA.

- 2. Input pulse is adjusted so  $I_{\mbox{\scriptsize R(peak)}}$  is equal to 10 mA.
- 3.  $t_p \gg t_{rr}$

Figure 1. Recovery Time Equivalent Test Circuit

### BAS16H

## **TYPICAL CHARACTERISTICS**

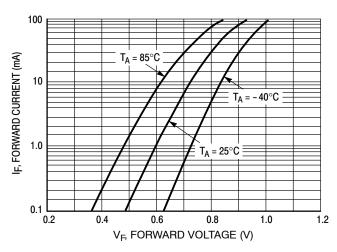


Figure 2. Forward Voltage

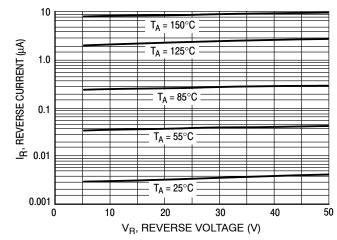


Figure 3. Leakage Current

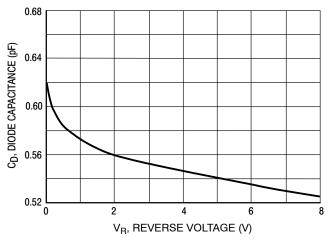


Figure 4. Capacitance

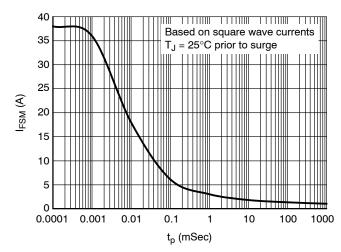



Figure 5. Maximum Non-repetitive Peak Forward Current as a Function of Pulse Duration, Typical Values






#### SOD-323 1.70x1.25x0.85 **CASE 477 ISSUE K**


**DATE 11 MAR 2024** 



#### NOTES:


- 1. DIMENSIONING AND TOLERANCING AS PER ASME Y14.5M, 2018.
- CONTROLLING DIMENSION: MILLIMETERS. LEAD THICKNESS SPECIFIED PER L/F DRAWING WITH 3. SOLDER PLATING.
- DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
  DIMENSION L IS MEASURE FROM END OF RADIUS.





DIM	MILLIMETERS			
ויונע	MIN.	N□M.	MAX.	
Α	0.80	0.90	1.00	
A1	0.00	0.05	0.10	
A2	0.75	0.85	0.95	
А3	0.15 (REF)			
b	0.25	0.32	0.4	
C	0.09	0.12	0.18	
D	1.60	1.70	1.80	
E	1.15	1.25	1.35	
Н	2.30	2.50	2.70	
L	0.08			
L1	0.40 (REF)			


MILLIMETEDS



#### RECOMMENDED MOUNTING FOOTPRINT

\*For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques
Reference manual, SDLDERRM/D.

#### **GENERIC MARKING DIAGRAM\***



XX = Specific Device Code M = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

STYLE 2: NO POLARITY PIN 1. CATHODE (POLARITY BAND) 2. ANODE

DOCUMENT NUMBER:	98ASB17533C	Electronic versions are uncontrolled except when accessed directly from the Document Repositor, Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOD-323 1.70x1.25x0.85		PAGE 1 OF 1

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales