onsemi

Dual Switching Diode, Common Anode

BAWH56W, NSVBAWH56W

Features

- 175°C T_{J(MAX)} Rated for High Temperature, Mission Critical Applications
- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS ($T_A = 25^{\circ}C$)

Symbol	Rating	Max	Unit
V _R	Reverse Voltage	70	V
١ _F	Forward Current	200	mA
I _{FSM}	Non-Repetitive Peak Surge Current (surge applied at rated load conditions, half wave, single pulse, 60 Hz)	2.0	A

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS (T_A = 25°C)


Symbol	Characteristic	Мах	Unit
P _D	Total Device Dissipation FR-5 Board (Note 1) $T_A = 25^{\circ}C$	200	mW
	Derate above 25°C	1.1	mW/°C
$R_{ hetaJA}$	Thermal Resistance, Junction-to-Ambient (Note 1)	615	°C/W
PD	Total Device Dissipation Alumina Substrate (Note 2) $T_A = 25^{\circ}C$	300	mW
	Derate above 25°C		mW/°C
$R_{ hetaJA}$	Thermal Resistance, Junction-to-Ambient (Note 2)	417	°C/W
T _J , T _{stg}	Junction and Storage Temperature	–55 to +175	°C

1. FR-5 = $1.0 \times 0.75 \times 0.062$ in.


2. Alumina = 0.4 \times 0.3 \times 0.024 in. 99.5% alumina.



STYLE 4



MARKING DIAGRAM



(Note: Microdot may be in either location)

*Date Code orientation may vary depending upon manufacturing location.

ORDERING INFORMATION

Device	Package	Shipping [†]
BAWH56WT1G	SC–70 (Pb–Free)	3,000 / Tape & Reel
NSVBAWH56WT1G	SC–70 (Pb–Free)	3,000 / Tape & Reel


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, <u>BRD8011/D</u>.

BAWH56W, NSVBAWH56W

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Symbol	Characteristic	Min	Max	Unit
OFF CHAR	ACTERISTICS			
V _(BR)	Reverse Breakdown Voltage (I _(BR) = 100 μA)	70	_	V
I _R	Reverse Voltage Leakage Current $(V_R = 25 \text{ V}, T_J = 175^{\circ}\text{C})$ $(V_R = 70 \text{ V})$ $(V_R = 70 \text{ V}, T_J = 175^{\circ}\text{C})$		30 2.5 50	μΑ
CD	Diode Capacitance ($V_R = 0, f = 1.0 \text{ MHz}$)	-	2.0	pF
V _F	Forward Voltage $(I_F = 1.0 \text{ mA})$ $(I_F = 10 \text{ mA})$ $(I_F = 50 \text{ mA})$ $(I_F = 150 \text{ mA})$	- - - -	715 855 1000 1250	mV
t _{rr}	Reverse Recovery Time (I _F = I _R = 10 mA, R _L = 100 Ω , I _{R(REC)} = 1.0 mA) (Figure 1)	-	6.0	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

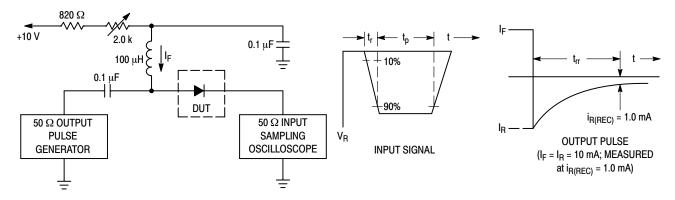

Notes: 1. A 2.0 k Ω variable resistor adjusted for a Forward Current (I_F) of 10 mA. 2. Input pulse is adjusted so I_{R(peak)} is equal to 10 mA. 3. t_p » t_{rr}

Figure 1. Recovery Time Equivalent Test Circuit

BAWH56W, NSVBAWH56W

TYPICAL CHARACTERISTICS



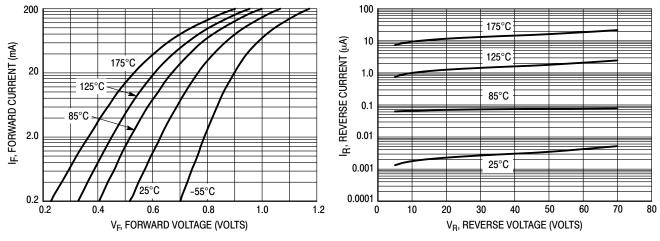


Figure 2. Forward Voltage



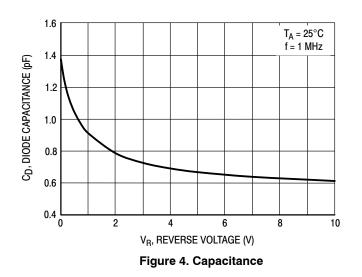

onsemi

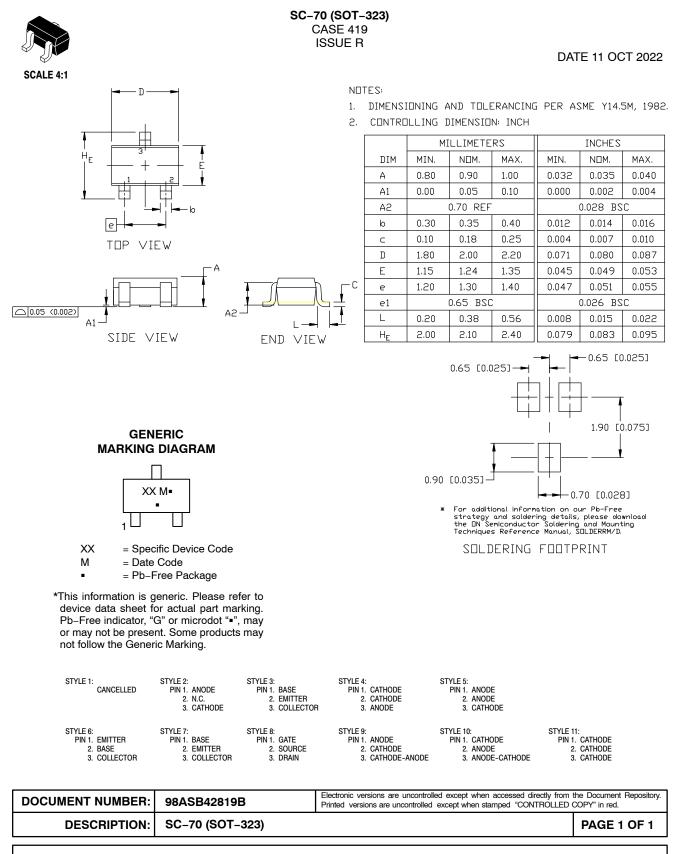

onsemi and ONSEMi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>