

Is Now Part of




ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor and is officers, employees, uniotificated use, even if such claim any manner.

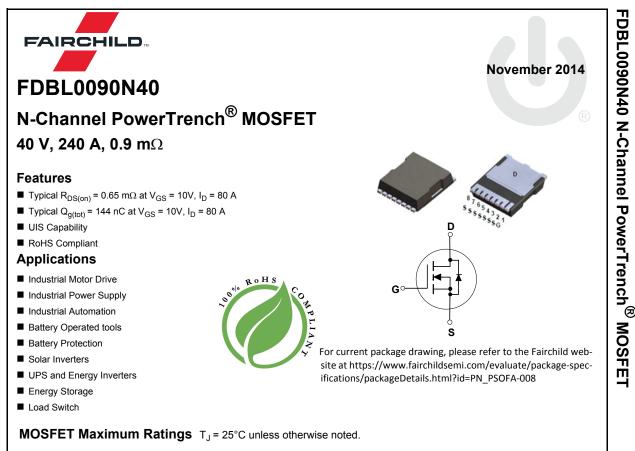

Symbol	Parameter		Ratings	Units
V _{DSS}	Drain-to-Source Voltage		40	V
V _{GS}	Gate-to-Source Voltage		±20	V
	Drain Current - Continuous (V _{GS} =10) (Note 1)	T _C =25°C	240	•
D	Pulsed Drain Current	T _C = 25°C	See Figure 4	— A
E _{AS}	Single Pulse Avalanche Energy	(Note 2)	737	mJ
D	Power Dissipation		357	W
P _D	Derate Above 25°C		2.38	W/ºC
T _J , T _{STG}	Operating and Storage Temperature		-55 to + 175	°C
$R_{\theta JC}$	Thermal Resistance, Junction to Case		0.42	°C/W
$R_{\theta JA}$	Maximum Thermal Resistance, Junction to Ambient	(Note 3)	43	°C/W

Notes:

1: Current is limited by bondwire configuration.


2: Starting $T_J = 25^{\circ}$ C, L = 0.36mH, $I_{AS} = 64A$, $V_{DD} = 40V$ during inductor charging and $V_{DD} = 0V$ during time in avalanche.


3: R_{0JA} is the sum of the junction-to-case and case-to-ambient thermal resistance, where the case thermal reference is defined as the solder mounting surface of the drain pins. R_{0JC} is guaranteed by design, while R_{0JA} is determined by the board design. The maximum rating presented here is based on mounting on a 1 in² pad of 2oz copper.

Package Marking and Ordering Information


Device Marking	Device	Package			
FDBL0090N40	FDBL0090N40	MO-299A	-	-	-

	Symbol	Parameter	Test Conditions		Min.	Тур.	Max.	Units
	-		100	Conditions		.,,,,	mux.	onne
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$		1	1			1	T	r
	B _{VDSS}			-	V			
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	Ince	Drain-to-Source Leakage Current			-	-		μA
	.033	Ű		T _J = 175 ^o C (Note 4)	-	-		mA
	I _{GSS}	Gate-to-Source Leakage Current	$V_{GS} = \pm 20V$		-	-	±100	nA
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	On Cha	racteristics						
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	V	Cata to Source Threshold Voltage	<u> </u>	- 250 4	2.0	2.2	4.0	V
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	VGS(th)	Gale to Source Threshold Voltage					-	-
Dynamic Characteristics C_{iss} Input Capacitance $V_{DS} = 25V, V_{GS} = 0V, f = 1000$ - pF C_{oss} Output Capacitance $V_{DS} = 25V, V_{GS} = 0V, f = 10Hz$ - 3260 - pF C_{rss} Reverse Transfer Capacitance $f = 1MHz$ - 3.3 - Ω $Q_g(ToT)$ Total Gate Charge at $10V$ $V_{GS} = 0$ to $10V$ $V_{DD} = 32V$ - 1444 188 nC $Q_{g(th)}$ Threshold Gate Charge $V_{GS} = 0$ to $2V$ $V_{DD} = 32V$ - 1444 188 nC $Q_{g(th)}$ Threshold Gate Charge $V_{GS} = 0$ to $2V$ $V_{DD} = 32V$ - 1444 188 nC Q_{gd} Gate-to-Source Gate Charge $V_{GS} = 0$ to $2V$ $V_{DD} = 80A$ - 22 26 nC Q_{gd} Gate-to-Drain "Miller" Charge - 16 - nC $Switching Characteristics$ $V_{DD} = 20V, I_D = 80A, V_{DD} = 20V, I_D = 80A, V_{DD} = 80A, P_{CS} = 10V, R_{GEN} = 6\Omega$ - 83 - ns $t_{d(off)}$ Turn-Off Delay $V_{GS} = $	R _{DS(on)}	Drain to Source On Resistance			-			
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $			193 101	1 10 0 (1010 4)		1.10	1.00	1113.2
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	-					(0000		
$\begin{array}{c c c c c c c c c c c c c c c c c c c $		· ·	V _{DS} = 25V, \	/ _{GS} = 0V,				•
$\begin{array}{c c c c c c c c c c c c c c c c c c c $					-		-	
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	C _{rss}		£ - 4N4LI-		-		-	
$\begin{array}{c c c c c c c c c c c c c c c c c c c $				0) (-		-	
$\begin{array}{c c c c c c c c c c c c c c c c c c c $		•						-
$\begin{array}{c c c c c c c c c c c c c c c c c c c $			$v_{GS} = 0$ to 2	V I _D = 80A				-
3"Switching CharacteristicstonTurn-On Timet_d(on)Turn-On Delay162nst_d(off)Turn-Off DelayVDD = 20V, ID = 80A, VGS = 10V, RGEN = 6073-nst_d(off)Turn-Off DelayVGS = 10V, RGEN = 6050-nst_fFall Time279nst_offTurn-Off Time279ns	Qas	-		_	-		-	
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $					-	10	-	no
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $								
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	Q _{gd} Switchi	ng Characteristics					(00	
$ \begin{array}{c c} \mbox{t}_{d(off)} & \mbox{Turn-Off Delay} & \mbox{V}_{GS} = 10 \mbox{V}, \mbox{R}_{GEN} = 6 \Omega & - & 83 & - & ns \\ \hline \mbox{t}_{f} & \mbox{Fall Time} & - & 50 & - & ns \\ \hline \mbox{t}_{off} & \mbox{Turn-Off Time} & - & 279 & ns \\ \end{array} $	Q _{gd} Switchi	ng Characteristics					162	
Image: second	Q _{gd} Switchi t _{on} t _{d(on)}	ng Characteristics Turn-On Time Turn-On Delay			-	42	-	ns
t _{off} Turn-Off Time 279 ns	Q _{gd} Switchi t _{on} t _{d(on)} t _r	ng Characteristics Turn-On Time Turn-On Delay Rise Time			-	42 73	-	ns ns
	Q _{gd} Switchi t _{on} t _{d(on)} t _r t _{d(off)}	ng Characteristics Turn-On Time Turn-On Delay Rise Time Turn-Off Delay			-	42 73 83	-	ns ns ns
Drain Source Diade Characteristics	Q _{gd} Switchi t _{on} t _{d(on)} t _r t _{d(off)} t _f	ng Characteristics Turn-On Time Turn-On Delay Rise Time Turn-Off Delay Fall Time			- - -	42 73 83 50	-	ns ns ns ns
	Q _{gd} Switchi	ng Characteristics					400	
	Q_{gd} Switchi t_{on} $t_{d(on)}$ t_r $t_{d(off)}$ t_f t_{off}	ng Characteristics Turn-On Time Turn-On Delay Rise Time Turn-Off Delay Fall Time			- - -	42 73 83 50	-	ns ns ns ns
$l_{00} = 80A V_{00} = 0V$ 1.25 V	Q_{gd} Switchi t_{on} $t_{d(on)}$ t_r $t_{d(off)}$ t_f t_{off}	ng Characteristics Turn-On Time Turn-On Delay Rise Time Turn-Off Delay Fall Time Turn-Off Time	V _{GS} = 10V,	R _{GEN} = 6Ω		42 73 83 50	- - - 279	ns ns ns ns
V_{SD} Source-to-Drain Diode Voltage $\frac{I_{SD} = 80A, V_{GS} = 0V 1.25 V}{I_{SD} = 40A, V_{GS} = 0V 1.25 V}$	Q_{gd} Switchi t_{on} $t_{d(on)}$ t_r $t_{d(off)}$ t_f t_{off} Drain-S	ng Characteristics Turn-On Time Turn-On Delay Rise Time Turn-Off Delay Fall Time Turn-Off Time cource Diode Characteristics	V _{GS} = 10V,	R _{GEN} = 6Ω _{GS} = 0V		42 73 83 50 -	- - 279 1.25	ns ns ns ns V
$ \begin{array}{c c c c c c c } V_{SD} & Source-to-Drain Diode Voltage & \hline I_{SD} = 80A, V_{GS} = 0V & - & - & 1.25 & V \\ \hline I_{SD} = 40A, V_{GS} = 0V & - & - & 1.2 & V \\ \hline I_{F} = 80A, dI_{SD}/dt = 100A/\mu s, & - & 111 & 129 & ns \\ \hline \end{array} $	Q_{gd} Switchi t_{on} $t_{d(on)}$ t_r $t_{d(off)}$ t_f t_{off} Drain-S	ng Characteristics Turn-On Time Turn-On Delay Rise Time Turn-Off Delay Fall Time Turn-Off Time cource Diode Characteristics Source-to-Drain Diode Voltage	V _{GS} = 10V,	$R_{GEN} = 6\Omega$ GS = 0V $V_{GS} = 0V$		42 73 83 50 - -	- - 279 1.25 1.2	ns ns ns ns v V

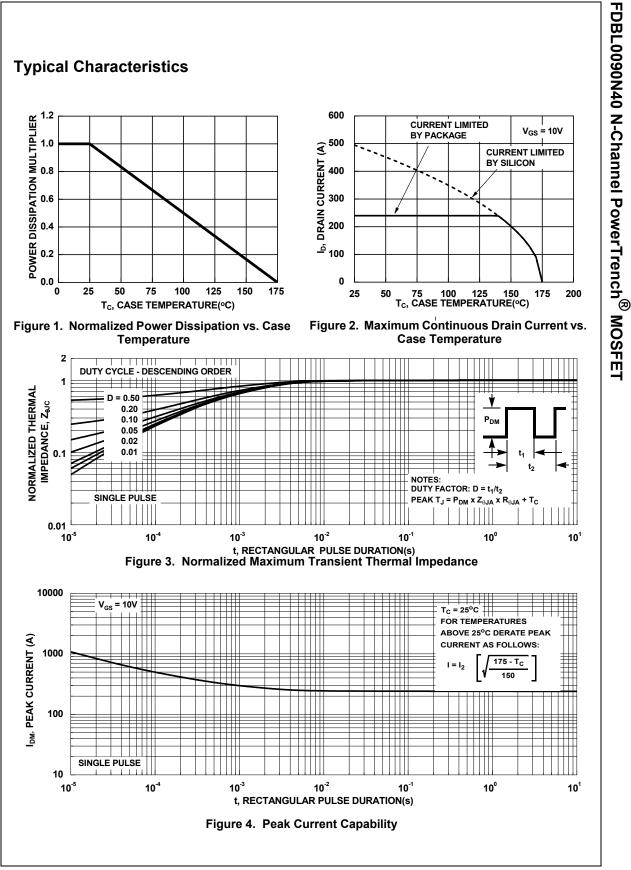

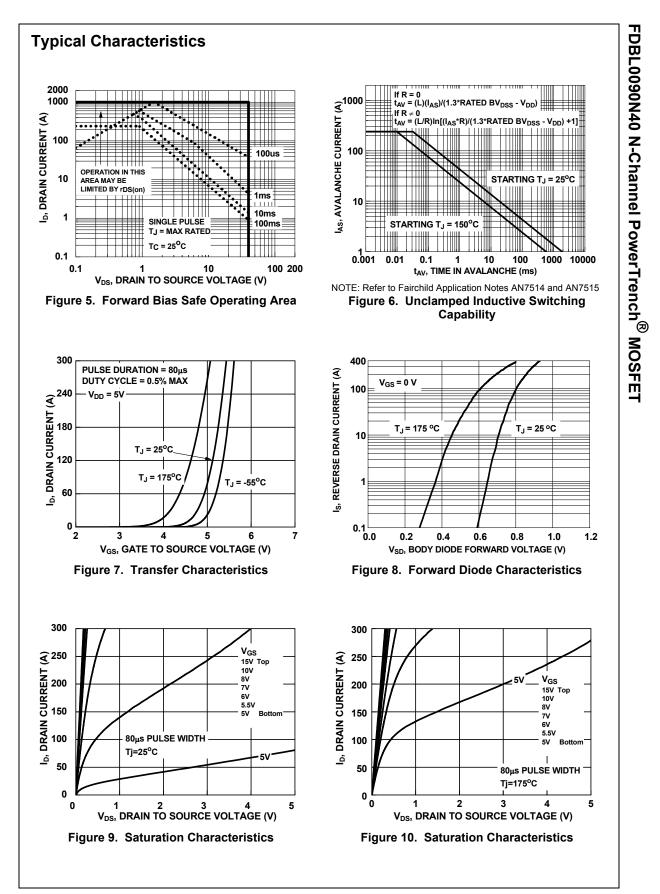

FDBL0090N40 Rev.C2

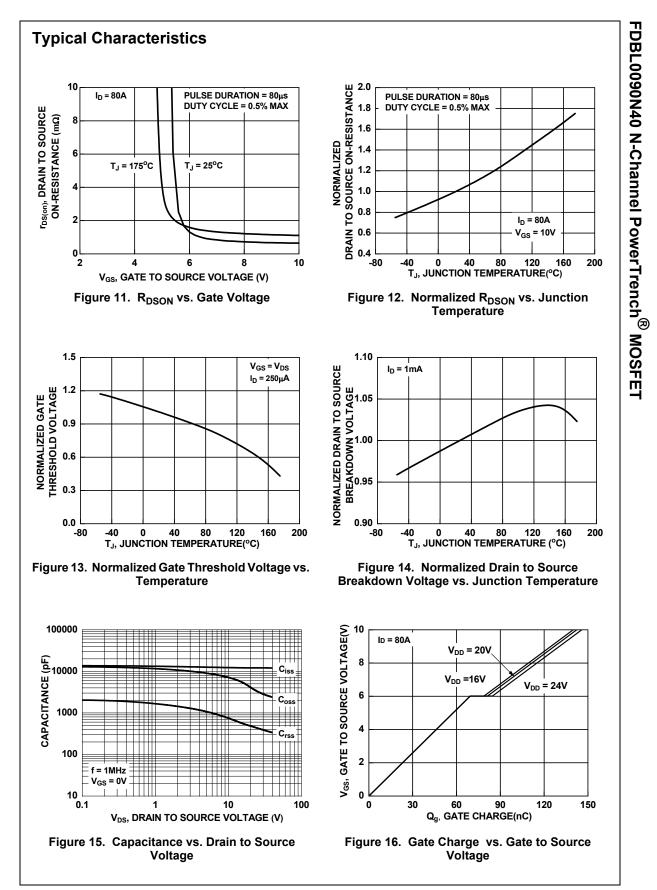

FDBL0090N40 Rev.C2



TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

Accul	Power™	F-PFS™		SYSTEM ®*
Awing	da [®]	FRFET®	®	
AX-C	AP®*	Global Power Resource SM	PowerTrench®	GENERAL
BitSiC	TM	GreenBridge™	PowerXS [™]	TinyBoost [®]
	it Now™	Green FPS™	Programmable Active Droop™	TinyBuck [®]
	PLUS™	Green FPS™ e-Series™	QFET [®]	TinyCalc™
			QS™	TinyLogic [®]
	POWER™	Gmax™		TINYOPTO™
	SSVOLT™	GTO™ Istell'MAAXTM	Quiet Series™	TinyPower™
CTL™		IntelliMAX™	RapidConfigure™	TinyPWM™
Curre	ent Transfer Logic™	ISOPLANAR™		TinyWire™
DEU	XPEED [®]	Marking Small Speakers Sound Louder		TranSiC™
	Cool™	and Better™	Saving our world, 1mW/W/kW at a time™	TriFault Detect™
	PARK [®]	MegaBuck™	SignalWise™	TRUECURRENT®*
Effice	entMax™	MICROCOUPLER™	SmartMax™	µSerDes™
ESBC	C™	MicroFET™	SMART START™	
_	R	MicroPak™	Solutions for Your Success™	
+		MicroPak2™	SPM®	Ser Des"
Fairch	hild®	MillerDrive™	STEALTH™	UHC®
	hild Semiconductor [®]	MotionMax™	SuperFET®	Ultra FRFET™
		MotionGrid®	SuperSOT™-3	UniFET™
FACT	Γ Quiet Series™ -®	MTi [®]	SuperSOT™-6	VCX™
FACT	-®	MTx®	SuperSOT™-8	VisualMax™
FAST		MVN [®]	SupreMOS®	VoltagePlus™
	Core™	mWSaver [®]	SyncFET™	XS™
	Bench™		,	
FPS™	M	OptoHiT™	Sync-Lock™	Xsens™
				仙童 ™

*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT <u>HTTP://WWW.FAIRCHILDSEMI.COM</u>. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts buyft from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC