

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild guestions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



October 2008

FDS4897AC

Dual N & P-Channel PowerTrench® MOSFET

N-Channel: 40 V, 6.1 A, 26 m Ω P-Channel: -40 V, -5.2 A, 39 m Ω

Features

Q1: N-Channel

- Max $r_{DS(on)}$ = 26 m Ω at V_{GS} = 10 V, I_D = 6.1 A
- Max $r_{DS(on)} = 31 \text{ m}\Omega$ at $V_{GS} = 4.5 \text{ V}$, $I_D = 5.6 \text{ A}$

Q2: P-Channel

- Max $r_{DS(on)}$ = 39 m Ω at V_{GS} = -10 V, I_D = -5.2 A
- Max $r_{DS(on)}$ = 65 m Ω at V_{GS} = -4.5 V, I_D = -4.1 A
- 100% UIL Tested
- RoHS Compliant





General Description

These dual N- and P-Channel MOSFETs are produced using Fairchild Semiconductor's advanced PowerTrench® process that has been especially tailored to minimize on-state resistance and yet maintain superior switching performance.

Applications

- Inverter
- Power Supplies





MOSFET Maximum Ratings T_A = 25 °C unless otherwise noted

Symbol	Parameter			Q1	Q2	Units
V_{DS}	Drain to Source Voltage			40	-40	V
V_{GS}	Gate to Source Voltage			±20	±20	V
	Drain Current - Continuous		6.1	-5.2	۸	
I _D	- Pulsed			24	-24	A
	Power Dissipation for Dual Operation			2	.0	
P_{D}	Power Dissipation for Single Operation	T _A = 25 °C	(Note 1a)	e 1a) 1.6		W
		T _A = 25 °C	(Note 1b)	0	.9	
E _{AS}	Single Pulse Avalanche Energy		(Note 3)	37	73	mJ
T _J , T _{STG}	Operating and Storage Junction Temperature Range -55 to +150				°C	

Thermal Characteristics

$R_{\theta JC}$	Thermal Resistance, Junction to Case,	(Note 1)	40	°C/M
$R_{\theta JC}$	Thermal Resistance, Junction to Ambient,	(Note 1a)	78	°C/W

Package Marking and Ordering Information

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FDS4897AC	FDS4897AC	SO-8	13 "	12 mm	2500 units

Electrical Characteristics $T_J = 25$ °C unless otherwise noted

Symbol	Parameter	Test Conditions	Type	Min	Тур	Max	Units
Off Chara	acteristics						
BV _{DSS}	Drain to Source Breakdown Voltage	$I_D = 250 \mu A, V_{GS} = 0 V$ $I_D = -250 \mu A, V_{GS} = 0 V$	Q1 Q2	40 -40			V
$\frac{\Delta BV_{DSS}}{\Delta T_{J}}$	Breakdown Voltage Temperature Coefficient	I_D = 250 μA, referenced to 25 °C I_D = -250 μA, referenced to 25 °C	Q1 Q2		37 -32		mV/°C
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 32 V, V _{GS} = 0 V V _{DS} = -32 V, V _{GS} = 0 V	Q1 Q2			1 -1	μА
I _{GSS}	Gate to Source Leakage Current	V _{GS} = ±20 V, V _{DS} = 0 V	Q1 Q2			±100 ±100	nA nA

On Characteristics

V _{GS(th)}	Gate to Source Threshold Voltage	$V_{GS} = V_{DS}$, $I_D = 250 \mu A$	Q1	1.5	2.0	3.0	V
- GS(III)		$V_{GS} = V_{DS}, I_{D} = -250 \mu A$	Q2	-1.5	-2.0	-3.0	-
$\Delta V_{GS(th)}$	Gate to Source Threshold Voltage	$I_D = 250 \mu A$, referenced to 25 °C	Q1		-6		mV/°C
ΔT_{J}	Temperature Coefficient	I_D = -250 μ A, referenced to 25 °C	Q2		6		IIIV/ C
	Static Drain to Source On Resistance	$V_{GS} = 10 \text{ V}, I_D = 6.1 \text{ A}$			20	26	
		$V_{GS} = 4.5 \text{ V}, I_D = 5.6 \text{ A}$	Q1		24	31	
-		$V_{GS} = 10 \text{ V}, I_D = 6.1 \text{ A}, T_J = 125 ^{\circ}\text{C}$			30	39	mΩ
r _{DS(on)}	Static Drain to Source On Resistance	$V_{GS} = -10 \text{ V}, I_D = -5.2 \text{ A}$			28	39	11122
		$V_{GS} = -4.5 \text{ V}, I_{D} = -4.1 \text{ A}$	Q2		45	65	
		$V_{GS} = -10 \text{ V}, I_D = -5.2 \text{ A}, T_J = 125 \text{ °C}$			41	57	
a	Forward Transconductance	$V_{DD} = 5 \text{ V}, I_D = 6.1 \text{ A}$	Q1		24		S
9 _{FS}	Forward Transconductance	$V_{DD} = -5 \text{ V}, \ I_{D} = -5.2 \text{ A}$	Q2		14		3

Dynamic Characteristics

C _{iss}	Input Capacitance	Q1 V _{DS} = 20 V, V _{GS} = 0 V, f = 1 MHZ	Q1 Q2	795 765	1055 1015	pF
C _{oss}	Output Capacitance	Q2	Q1 Q2	95 135	130 180	pF
C _{rss}	Reverse Transfer Capacitance	$V_{DS} = -20 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ MHZ}$	Q1 Q2	65 80	100 120	pF
R_g	Gate Resistance		Q1 Q2	1.7 3.6		Ω

Switching Characteristics

t _{d(on)}	Turn-On Delay Time	Q1	Q1 Q2	6 8	12 15	ns
t _r	Rise Time	$V_{DD} = 20 \text{ V, } I_{D} = 6.1 \text{ A,}$ $V_{GS} = 10 \text{ V, } R_{GEN} = 6 \Omega$	Q1 Q2	2 3	10 10	ns
t _{d(off)}	Turn-Off Delay Time	Q2 V _{DD} = -20 V, I _D = -5.2 A,	Q1 Q2	17 17	30 30	ns
t _f	Fall Time	$V_{GS} = -10 \text{ V}, R_{GEN} = 6 \Omega$	Q1 Q2	2	10 10	ns
Q _{g(TOT)}	Total Gate Charge	Q1	Q1 Q2	15 15	21 20	nC
Q _{gs}	Gate to Source Charge	$V_{GS} = 10 \text{ V}, V_{DD} = 20 \text{ V}, I_D = 6.1 \text{ A}$	Q1 Q2	2.5 2.6		nC
Q _{gd}	Gate to Drain "Miller" Charge	$V_{GS} = -10 \text{ V}, V_{DD} = -20 \text{ V}, I_D = -5.2 \text{ A}$	Q1 Q2	2.9 3.2		nC

Electrical Characteristics $T_J = 25$ °C unless otherwise noted

Parameter

Drain-	rain-Source Diode Characteristics							
V_{SD}	Source to Drain Diode Forward Voltage	$V_{GS} = 0 \text{ V}, I_S = 1.3 \text{ A}$ $V_{GS} = 0 \text{ V}, I_S = -1.3 \text{ A}$	(Note 2) (Note 2)	Q1 Q2		0.75 -0.76	1.2 -1.2	V
		V _{GS} = 0 V, I _S = -1.3 A	(Note 2)	Q2 Q1		17	31	
t _{rr}	Reverse Recovery Time	I _F = 6.1 A, di/dt = 100 A/s		Q2		20	36	ns
Q _{rr}	Reverse Recovery Charge	Q2	=	Q1		7	15	nC
∝ rr	Trovorso resourcity charge	$I_F = -5.2 \text{ A}, \text{ di/dt} = 100 \text{ A/s}$		Q2		10	20	

Test Conditions

Notes:

Symbol

1: R_{UJA} is determined with the device mounted on a 1in² pad 2 oz copper pad on a 1.5 x 1.5 in. board of FR-4 material. R_{BJC} is guaranteed by design while R_{BCA} is determined by the user's board design.



a) 78 °C/W when mounted on a 1 in² pad of 2 oz copper



b) 135 °C/W when mounted on a minimun pad

Type

Min

Тур

Max

Units

- 2: Pulse Test: Pulse Width < $300~\mu s$, Duty cycle < 2.0%. 3: Starting $T_J = 25~^{\circ}C$, N-ch: L = 3~mH, $I_{AS} = 5~A$, $V_{DD} = 40~V$, $V_{GS} = 10~V$; P-ch: L = 3~mH, $I_{AS} = -7~A$, $V_{DD} = -40~V$, $V_{GS} = -10~V$.

Typical Characteristics (Q1 N-Channel) T_J = 25 °C unless otherwise noted




Figure 1. On Region Characteristics




Figure 3. Normalized On Resistance vs Junction Temperature




Figure 5. Transfer Characteristics




Figure 2. Normalized On-Resistance vs Drain Current and Gate Voltage




Figure 4. On-Resistance vs Gate to Source Voltage




Figure 6. Source to Drain Diode Forward Voltage vs Source Current

Typical Characteristics (Q1 N-Channel) T_J = 25 °C unless otherwise noted




Figure 7. Gate Charge Characteristics




Figure 9. Unclamped Inductive Switching Capability




Figure 11. Forward Bias Safe Operating Area




Figure 8. Capacitance vs Drain to Source Voltage




Figure 10. Maximum Continuous Drain Current vs Ambient Temperature




Figure 12. Single Pulse Maximum Power Dissipation

Typical Characteristics (Q1 N-Channel) T_J = 25 °C unless otherwise noted

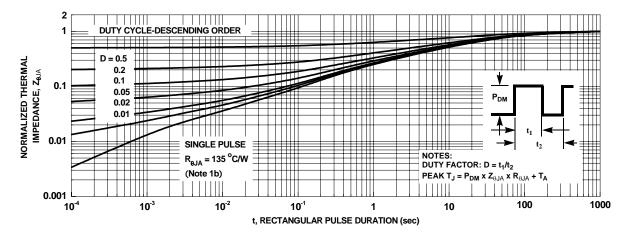


Figure 13. Junction-to-Ambient Transient Thermal Response Curve

Typical Characteristics (Q2 P-Channel) T_J = 25 °C unless otherwise noted




Figure 15. On- Region Characteristics




Figure 17. Normalized On-Resistance vs Junction Temperature




Figure 19. Transfer Characteristics




Figure 16. Normalized on-Resistance vs Drain Current and Gate Voltage




Figure 18. On-Resistance vs Gate to Source Voltage




Figure 20. Source to Drain Diode Forward Voltage vs Source Current

Typical Characteristics (Q2 P-Channel) T_J = 25 °C unless otherwise noted




Figure 21. Gate Charge Characteristics




Figure 23. Unclamped Inductive Switching Capability




Figure 25. Forward Bias Safe Operating Area




Figure 22. Capacitance vs Drain to Source Voltage




Figure 24. Maximum Continuous Drain Current vs Ambient Temperature




Figure 26. Single Pulse Maximum Power Dissipation

Typical Characteristics (Q2 P-Channel) T_J = 25 °C unless otherwise noted

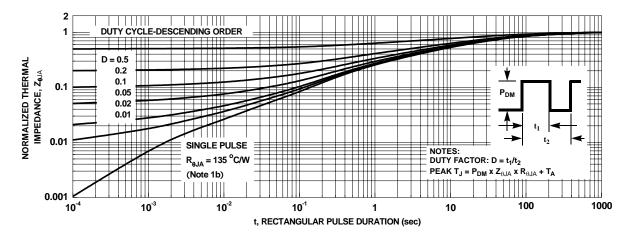


Figure 27. Junction-to-Ambient Transient Thermal Response Curve





TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

Build it Now™
CorePLUS™
CorePOWER™
CROSSVOLT™
CTL™

Current Transfer Logic™ EcoSPARK® EfficentMax™ EZSWITCH™ *

Fairchild®

Fairchild[®]
Fairchild Semiconductor[®]
FACT Quiet Series[™]

FACT®
FAST®
FastvCore™
FlashWriter® *
FPS™
F-PFS™

FRFET®
Global Power ResourceSM
Green FPS™
Green FPS™ e-Series™

GTOTM
IntelliMAXTM
ISOPLANARTM
MegaBuckTM
MICROCOUPLERTM
MicroFETTM

MicroPak™ MillerDrive™ MotionMax™ Motion-SPM™ OPTOLOGIC® OPTOPLANAR®

PDP SPMTM Power-SPMTM PowerTrench[®] PowerXSTM Programmable Active Droop™ QFET® QS™

Quiet Series™ RapidConfigure™

Saving our world, 1mW /W /kW at a time™ SmartMax™

SMART STARTTM SPM® STEALTHTM SuperFETTM SuperSOTTM-3 SuperSOTTM-6 SuperSOTTM-8 SupreMOSTM SyncFETTM

SYSTEM ®

GENERAL

The Power Franchise®

franchise
franchise
finyBoost™
finyBoost™
finyLogic®
TINYOPTO™
finyPower™
finyPWM™
finyPWM™
finyPWM™
pSerDes™

SerDes UHC®
Ultra FRFET™
UniFET™

UniFET™ VCX™ VisualMax™ XS™

* EZSWITCH™ and FlashWriter® are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN. WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are
 intended for surgical implant into the body or (b) support or sustain life,
 and (c) whose failure to perform when properly used in accordance with
 instructions for use provided in the labeling, can be reasonably
 expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Farichild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Farichild strongly encourages customers to purchase Farichild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Farichild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Farichild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. I37

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdt/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative