

Is Now Part of



# **ON Semiconductor**®

# To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="mailto:www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to <a href="mailto:Fairchild\_questions@onsemi.com">Fairchild\_questions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor and is officers, employees, uniotificated use, even if such claim any manner.



## 2SA1962/FJA4213 **PNP Epitaxial Silicon Transistor**

### Applications

- · High-Fidelity Audio Output Amplifier
- General Purpose Power Amplifier ٠

### **Features**

- High Current Capability: I<sub>C</sub> = -17A
- High Power Dissipation : 130watts •
- High Frequency : 30MHz.
- High Voltage : V<sub>CEO</sub>= -250V
- Wide S.O.A for reliable operation.
- Excellent Gain Linearity for low THD.
- Complement to 2SC5242/FJA4313.
- Thermal and electrical Spice models are available.
- Same transistor is also available in:
  - -- TO264 package, 2SA1943/FJL4215 : 150 watts
  - -- TO220 package, FJP1943 : 80 watts
  - -- TO220F package, FJPF1943 : 50 watts

Absolute Maximum Ratings* T <sub>a</sub> = 25°C unless otherwise noted					
Symbol	Parameter	Ratings	Units		
BV <sub>CBO</sub>	Collector-Base Voltage	-250	V		
BV <sub>CEO</sub>	Collector-Emitter Voltage	-250	V		
BV <sub>EBO</sub>	Emitter-Base Voltage	-5	V		
I <sub>C</sub>	Collector Current	-17	А		
I <sub>B</sub>	Base Current	-1.5	А		
P <sub>D</sub>	Total Device Dissipation( $T_C=25^{\circ}C$ ) Derate above 25°C	130 1.04	W W/°C		
T <sub>J</sub> , T <sub>STG</sub>	Junction and Storage Temperature	- 50 ~ +150	°C		

### .

\* These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

### Thermal Characteristics\* T<sub>a=25°C</sub> unless otherwise noted

Symbol	Parameter	Max.	Units
$R_{ ext{ heta}JC}$	Thermal Resistance, Junction to Case	0.96	°C/W

\* Device mounted on minimum pad size

### h<sub>FE</sub> Classification

Classification	R	0
h <sub>FE1</sub>	55 ~ 110	80 ~ 160

© 2009 Fairchild Semiconductor Corporation 2SA1962/FJA4213 Rev. C

TO-3P 1.Base 2.Collector 3.Emitter

January 2009




Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
BV <sub>CBO</sub>	Collector-Base Breakdown Voltage	I <sub>C</sub> =-5mA, I <sub>E</sub> =0	-250			V
BV <sub>CEO</sub>	Collector-Emitter Breakdown Voltage	$I_{C}$ =-10mA, $R_{BE}$ = $\infty$	-250			V
BV <sub>EBO</sub>	Emitter-Base Breakdown Voltage	I <sub>E</sub> =-5mA, I <sub>C</sub> =0	-5			V
I <sub>CBO</sub>	Collector Cut-off Current	V <sub>CB</sub> =-230V, I <sub>E</sub> =0			-5.0	μA
I <sub>EBO</sub>	Emitter Cut-off Current	V <sub>EB</sub> =-5V, I <sub>C</sub> =0			-5.0	μA
h <sub>FE1</sub>	DC Current Gain	V <sub>CE</sub> =-5V, I <sub>C</sub> =-1A	55		160	
h <sub>FE2</sub>	DC Current Gain	V <sub>CE</sub> =-5V, I <sub>C</sub> =-7A	35	60		
V <sub>CE</sub> (sat)	Collector-Emitter Saturation Voltage	I <sub>C</sub> =-8A, I <sub>B</sub> =-0.8A		-0.4	-3.0	V
V <sub>BE</sub> (on)	Base-Emitter On Voltage	V <sub>CE</sub> =-5V, I <sub>C</sub> =-7A		-1.0	-1.5	V
f <sub>T</sub>	Current Gain Bandwidth Product	V <sub>CE</sub> =-5V, I <sub>C</sub> =-1A		30		MHz
C <sub>ob</sub>	Output Capacitance	V <sub>CB</sub> =-10V, f=1MHz		360		pF

<sup>t</sup> Pulse Test: Pulse Width=20µs, Duty Cycle≤2%

### **Ordering Information**

Part Number	Marking	Package	Packing Method	Remarks
2SA1962RTU	A1962R	TO-3P	TUBE	hFE1 R grade
2SA1962OTU	A1962O	TO-3P	TUBE	hFE1 O grade
FJA4213RTU	J4213R	TO-3P	TUBE	hFE1 R grade
FJA4213OTU	J4213O	TO-3P	TUBE	hFE1 O grade

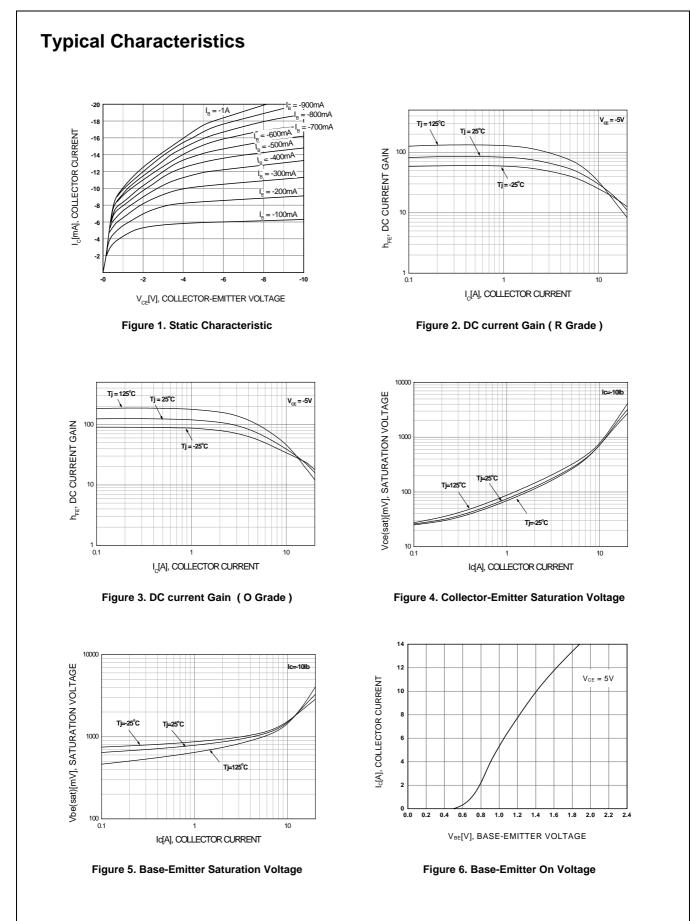

#### **Typical Characteristics** -100 1.0 Transient Thermal Resistance, $R_{\text{thic}} {}^{\text{l}}^{\text{C}} {}^{\text{V}} {}^{\text{M}}$ I<sub>c</sub> MAX. (Pulsed\*) 0.9 I<sub>c</sub> [A], COLLECTOR CURRENT 10ms 0.8 -10 I, MAX. (DC) 0.7 100ms DC 0.6 -1 0.5 0.4 0.3 -0.1 0.2 \*SINGLE NONREPETITIVE PULSE T<sub>c</sub>=25[°C] 0.1 -0.01 └ 1 10 100 1E-6 1E-5 1E-4 1E-3 0.01 0.1 $V_{ce}$ [V], COLLECTOR-EMITTER VOLTAGE Pulse duration [sec] Figure 8. Safe Operating Area Figure 7. Thermal Resistance





Figure 9. Power Derating



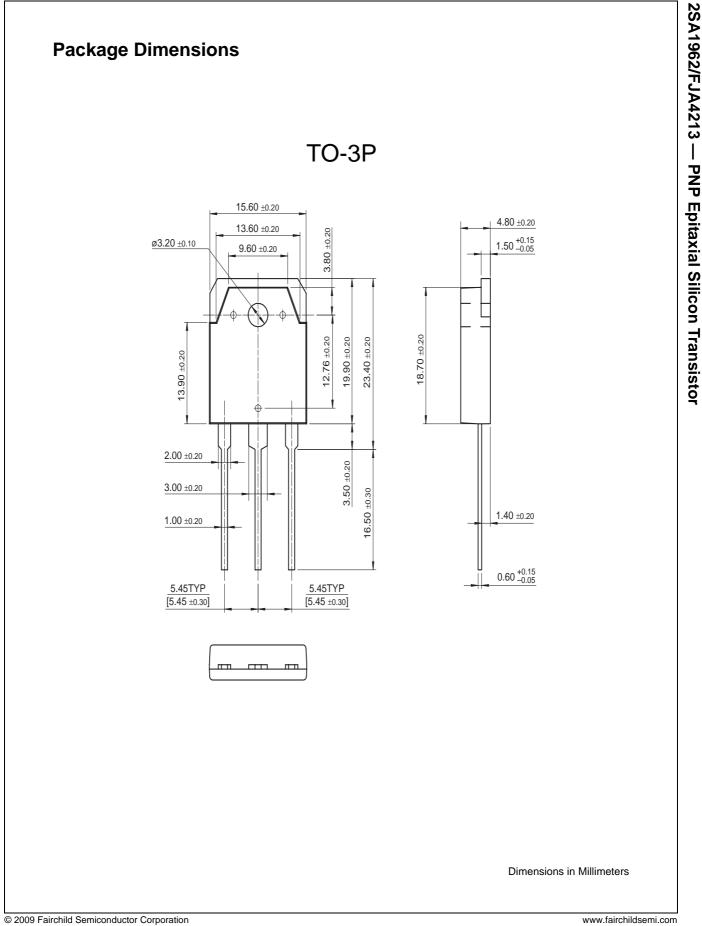

TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks

Build it Now™	FPS™	PDP SPM™	The Power Franchise®
CorePLUS™	F-PFS™	Power-SPM™	the
CorePOWER™	FRFET®	PowerTrench <sup>®</sup>	
CROSSVOLT™	Global Power Resource <sup>s™</sup>	Programmable Active Droop™	TinyBoost™
CTL™	Green FPS™	QFET®	TinyBuck™
Current Transfer Logic™	Green FPS™ e-Series™	QSTM	TinyLogic®
EcoSPARK®	GTO™	Quiet Series™	TINYOPTOM
EfficentMa×™	IntelliMAX™	RapidConfigure™	TinyPower™
EZSWITCH™ *	ISOPLANAR™	Saving our world, 1mW at a time™	TinyPVVM™
EZ™	MegaBuck™	SmartMax™	TinyWire™
	MICROCOUPLER™	SMART START™	µSerDes™
F	MicroFET™	SPM <sup>®</sup> STEALTH™	
Fairchild®	MicroPak™	SuperFET <sup>™</sup>	SerDes"
Fairchild Semiconductor®	MillerDrive™	SuperSOT <sup>M</sup> -3	UHC
FACT Quiet Series™	MotionMax™ Matian ORM™	SuperSOT™6	Ultra FRFET™
FACT®	Motion-SPM™ OPTOLOGIC®	SuperSOT™8	UniFET™
FAST®	OPTOPLANAR®	SupreMOS™	VCXTM
FastvCore™		SvncFET™	VisualMax™
FlashWriter <sup>®*</sup>	V (1)		
		GENERAL	

\* EZSWITCH™ and FlashWriter<sup>®</sup> are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN, NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS. SPECIFICALLY THE WARRANTY THEREIN. WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein

- intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 1. Life support devices or systems are devices or systems which, (a) are 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

#### **PRODUCT STATUS DEFINITIONS** Definition of Terms Datasheet Identification **Product Status** Definition Datasheet contains the design specifications for product development. Specifications may change in Formative / In Design Advance Information any manner without notice Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Preliminary **First Production** Semiconductor reserves the right to make changes at any time without notice to improve design. Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes No Identification Needed Full Production at any time without notice to improve the design. Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The Obsolete Not In Production datasheet is for reference information only.

Rev. 135

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death a

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC