# MBRB2545CTG, SBRB2545CTG

# Schottky Power Rectifier, Switch-Mode, 30 A, 45 V

The D<sup>2</sup>PAK Power Rectifier is a state-the-art device that employs the Schottky Barrier principle with a platinum barrier metal.

#### **Features**

- Center-Tap Configuration
- Guardring for Stress Protection
- Low Forward Voltage
- 175°C Operating Junction Temperature
- Epoxy Meets UL 94 V-0 @ 0.125 in
- Short Heat Sink Tab Manufactured Not Sheared
- Similar in Size to the Industry Standard TO-220 Package
- AEC-Q101 Qualified and PPAP Capable
- SBRB Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements
- All Packages are Pb-Free\*

#### **Mechanical Characteristics**

- Case: Epoxy, Molded, Epoxy Meets UL 94 V-0
- Weight: 1.7 Grams (Approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Device Meets MSL1 Requirements
- ESD Ratings:
  - ◆ Machine Model = C (> 400 V)
  - ♦ Human Body Model = 3B (> 8000 V)




#### ON Semiconductor®

http://onsemi.com


## SCHOTTKY BARRIER RECTIFIER 30 AMPERES, 45 VOLTS



D<sup>2</sup>PAK CASE 418B STYLE 3



#### **MARKING DIAGRAM**



A = Assembly Location

Y = Year
WW = Work Week
B2545 = Device Code
G = Pb-Free Package
AKA = Diode Polarity

#### **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

<sup>\*</sup>For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

### MBRB2545CTG, SBRB2545CTG

#### MAXIMUM RATINGS (Per Leg)

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	45	V
Average Rectified Forward Current (Rated $V_R$ , $T_C = 164^{\circ}C$ ) Total Device	I <sub>F(AV)</sub>	15 30	А
Peak Repetitive Forward Current (Rated V <sub>R</sub> , Square Wave, 20 kHz, T <sub>C</sub> = 160°C)	I <sub>FRM</sub>	30	А
Non-Repetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz)	I <sub>FSM</sub>	150	А
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I <sub>RRM</sub>	1.0	Α
Storage Temperature Range	T <sub>stg</sub>	-65 to +175	°C
Operating Junction Temperature (Note 1)	TJ	-65 to +175	°C
Voltage Rate of Change (Rated V <sub>R</sub> )	dv/dt	10,000	V/μs

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

#### THERMAL CHARACTERISTICS (Per Leg)

Characteristic	Symbol	Value	Unit
Thermal Resistance,			°C/W
Junction-to-Case	$R_{ heta JC}$	1.5	
Junction-to-Ambient (Note 2)	$R_{\theta JA}$	50	

<sup>2.</sup> When mounted using minimum recommended pad size on FR-4 board.

#### **ELECTRICAL CHARACTERISTICS** (Per Diode)

Symbol	Characteristic	Condition	Min	Тур	Max	Unit
V <sub>F</sub>	Instantaneous Forward Voltage (Note 3)	I <sub>F</sub> = 15 Amp, T <sub>J</sub> = 25°C I <sub>F</sub> = 15 Amp, T <sub>J</sub> = 125°C I <sub>F</sub> = 30 Amp, T <sub>J</sub> = 25°C I <sub>F</sub> = 30 Amp, T <sub>J</sub> = 125°C	- - -	- 0.50 - 0.65	0.62 0.57 0.82 0.72	<b>V</b>
I <sub>R</sub>	Instantaneous Reverse Current (Note 3)	$V_R$ = 45 Volts, $T_J$ = 25°C $V_R$ = 45 Volts, $T_J$ = 125°C	-	9.0	0.2 25	mA

<sup>3.</sup> Pulse Test: Pulse Width = 300  $\mu$ s, Duty Cycle  $\leq$  2.0%.


#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
MBRB2545CTG	D <sup>2</sup> PAK (Pb-Free)	50 Units / Rail
SBRB2545CTG	D <sup>2</sup> PAK (Pb-Free)	50 Units / Rail
MBRB2545CTT4G	D <sup>2</sup> PAK (Pb-Free)	800 Units / Tape & Reel
SBRB2545CTT4G	D <sup>2</sup> PAK (Pb-Free)	800 Units / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

<sup>1.</sup> The heat generated must be less than the thermal conductivity from Junction-to-Ambient:  $dP_D/dT_J < 1/R_{\theta JA}$ .

### MBRB2545CTG, SBRB2545CTG

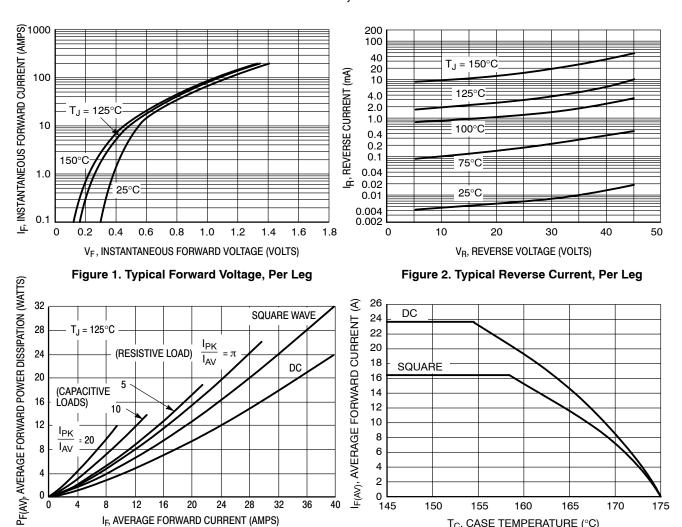

IF, AVERAGE FORWARD CURRENT (AMPS) Figure 3. Typical Forward Power Dissipation

Figure 4. Current Derating, Case per Leg

T<sub>C</sub>, CASE TEMPERATURE (°C)






D<sup>2</sup>PAK 3 CASE 418B-04 **ISSUE L** 


**DATE 17 FEB 2015** 

#### SCALE 1:1

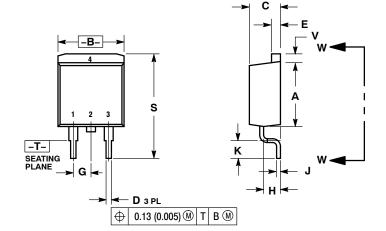

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
   CONTROLLING DIMENSION: INCH.
- 3. 418B-01 THRU 418B-03 OBSOLETE,
- NEW STANDARD 418B-04.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
Α	0.340	0.380	8.64	9.65
В	0.380	0.405	9.65	10.29
C	0.160	0.190	4.06	4.83
D	0.020	0.035	0.51	0.89
E	0.045	0.055	1.14	1.40
F	0.310	0.350	7.87	8.89
G	0.100 BSC		2.54 BSC	
Н	0.080	0.110	2.03 2.79	
J	0.018	0.025	0.46 0.64	
K	0.090	0.110	2.29 2.79	
L	0.052	0.072	1.32	1.83
М	0.280	0.320	7.11	8.13
N	0.197 REF		5.00 REF	
P	0.079 REF		2.00 REF	
R	0.039 REF		0.99 REF	
S	0.575	0.625	14.60	15.88
V	0.045	0.055	1.14	1.40

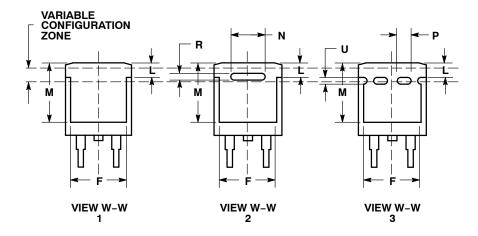

STYLE 1: PIN 1. BASE 2. COLLECTOR
3. EMITTER
4. COLLECTOR STYLE 2: PIN 1. GATE 2. DRAIN 3. SOURCE 4. DRAIN STYLE 3: PIN 1. ANODE 2. CATHODE 3. ANODE 4. CATHODE

STYLE 4:

PIN 1. GATE 2. COLLECTOR 3. EMITTER 4. COLLECTOR

STYLE 5: PIN 1. CATHODE 2. ANODE 3. CATHODE 4. ANODE

STYLE 6: PIN 1. NO CONNECT 2. CATHODE 3. ANODE 4. CATHODE


#### **MARKING INFORMATION AND FOOTPRINT ON PAGE 2**

DOCUMENT NUMBER:	98ASB42761B	Electronic versions are uncontrolled except when accessed directly from the Document Repository Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	D <sup>2</sup> PAK 3		PAGE 1 OF 2	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves brisefin and of 160 m are trademarked so defined values of services and of the confined values and of the values of the confined values and of the values of the confined values and of the values of the v special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**DATE 17 FEB 2015** 


# GENERIC MARKING DIAGRAM\*

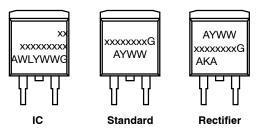

xx = Specific Device Code A = Assembly Location

WL = Wafer Lot
Y = Year
WW = Work Week
G = Pb-Free Package
AKA = Polarity Indicator

#### **SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98ASB42761B	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	D <sup>2</sup> PAK 3		PAGE 2 OF 2	

onsemi and ONSeMi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

<sup>\*</sup>This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales