# IGBT - Field Stop II / 4 Lead

This Insulated Gate Bipolar Transistor (IGBT) features a robust and cost effective Field Stop II Trench construction, and provides superior performance in demanding switching applications, offering both low on state voltage and minimal switching loss. In addition, this new device is packaged in a TO-247-4L package that provides significant reduction in Eon Losses compared to standard TO-247-3L package. The IGBT is well suited for UPS and solar applications. Incorporated into the device is a soft and fast co-packaged free wheeling diode with a low forward voltage.

#### Features

- Extremely Efficient Trench with Field Stop Technology
- $T_{Jmax} = 175^{\circ}C$
- Improved Gate Control Lowers Switching Losses
- Separate Emitter Drive Pin
- TO-247-4L for Minimal Eon Losses
- Optimized for High Speed Switching
- This is a Pb–Free Devices

#### **Typical Applications**

- Solar Inverters
- Uninterruptible Power Supplies (UPS)
- Neutral Point Clamp Topology

#### **ABSOLUTE MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Collector-emitter voltage	V <sub>CES</sub>	1200	V
Collector current @ Tc = 25°C @ Tc = 100°C	Ι <sub>C</sub>	100 25	A
Pulsed collector current, $T_{pulse}$ limited by $T_{Jmax}$	I <sub>CM</sub>	100	A
Diode forward current @ Tc = 25°C @ Tc = 100°C	١ <sub>F</sub>	100 25	A
Diode pulsed current, $T_{pulse}$ limited by $T_{Jmax}$	I <sub>FM</sub>	100	A
Gate-emitter voltage Transient gate-emitter voltage $(T_{pulse} = 5 \ \mu s, D < 0.10)$	V <sub>GE</sub>	±20 ±30	V
Power Dissipation @ Tc = 25°C @ Tc = 100°C	PD	385 192	W
Operating junction temperature range	Τ <sub>J</sub>	-55 to +175	°C
Storage temperature range	T <sub>stg</sub>	-55 to +175	°C
Lead temperature for soldering, 1/8" from case for 5 seconds	T <sub>SLD</sub>	260	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.




# **ON Semiconductor®**


www.onsemi.com

25 A, 1200 V V<sub>CEsat</sub> = 2.0 V  $E_{on} = 0.99 \text{ mJ}$ 





MARKING DIAGRAM



25N120FL2 = Specific Device Code

- А = Assembly Location Υ
  - = Year
- WW = Work Week G
  - = Pb-Free Package

#### **ORDERING INFORMATION**

Device	Package	Shipping
NGTB25N120FL2WAG	TO–247 (Pb–Free)	30 Units / Rail

#### THERMAL CHARACTERISTICS

Rating	Symbol	Value	Unit
Thermal resistance junction-to-case, for IGBT		0.39	°C/W
Thermal resistance junction-to-case, for Diode		0.64	°C/W
Thermal resistance junction-to-ambient		25	°C/W

#### **ELECTRICAL CHARACTERISTICS** ( $T_J = 25^{\circ}C$ unless otherwise specified)

Parameter	Test Conditions	Symbol	Min	Тур	Мах	Unit
STATIC CHARACTERISTIC						
Collector-emitter breakdown voltage, gate-emitter short-circuited	$V_{GE} = 0 \text{ V}, \text{ I}_{C} = 500 \mu\text{A}$	V <sub>(BR)CES</sub>	1200	-	_	V
Collector-emitter saturation voltage	$V_{GE}$ = 15 V, I <sub>C</sub> = 25 A $V_{GE}$ = 15 V, I <sub>C</sub> = 25 A, T <sub>J</sub> = 175°C	V <sub>CEsat</sub>	-	2.00 2.40	2.40 -	V
Gate-emitter threshold voltage	$V_{GE} = V_{CE}$ , $I_C = 400 \ \mu A$	V <sub>GE(th)</sub>	4.5	5.5	6.5	V
Collector-emitter cut-off current, gate- emitter short-circuited	$V_{GE} = 0 V$ , $V_{CE} = 1200 V$ $V_{GE} = 0 V$ , $V_{CE} = 1200 V$ , $T_{J} = 175^{\circ}C$	I <sub>CES</sub>		_ 4.0	0.4 -	mA
Gate leakage current, collector-emitter short-circuited	$V_{GE} = 20 \text{ V}$ , $V_{CE} = 0 \text{ V}$	I <sub>GES</sub>	I	-	200	nA


Input capacitance		Cies	-	4243	-	pF
Output capacitance	V <sub>CE</sub> = 20 V, V <sub>GE</sub> = 0 V, f = 1 MHz	C <sub>oes</sub>	-	159	-	
Reverse transfer capacitance		Cres	-	77	-	
Gate charge total		Qg	-	181	-	nC
Gate to emitter charge	$V_{CE} = 600 \text{ V}, I_C = 25 \text{ A}, V_{GE} = 15 \text{ V}$	Q <sub>ge</sub>	-	40	-	
Gate to collector charge		Q <sub>ac</sub>	-	87	_	1


#### SWITCHING CHARACTERISTIC, INDUCTIVE LOAD


Turn-on delay time		t <sub>d(on)</sub>	-	17	-	ns
Rise time		t <sub>r</sub>	-	19	_	
Turn-off delay time	T <sub>J</sub> = 25°C	t <sub>d(off)</sub>	-	113	-	
Fall time	$V_{CC} = 600 \text{ V}, \text{ I}_{C} = 50 \text{ A}$	t <sub>f</sub>	-	118	-	
Turn-on switching loss	$\begin{array}{c} T_{J} = 25^{\circ}C \\ V_{CC} = 600 \text{ V, } I_{C} = 50 \text{ A} \\ R_{g} = 10 \Omega \\ V_{GE} = \pm 15 \text{ V} \end{array}$	Eon	-	0.99	-	mJ
Turn-off switching loss		E <sub>off</sub>	-	0.66	-	
Total switching loss		E <sub>ts</sub>	-	1.65	-	
Turn-on delay time		t <sub>d(on)</sub>	-	15	-	ns
Rise time		t <sub>r</sub>	-	19	-	
Turn-off delay time	T <sub>J</sub> = 175°C	t <sub>d(off)</sub>	-	120	-	
Fall time	$T_{J} = 175 ^{\circ}C$ $V_{CC} = 600 \text{ V, } I_{C} = 50 \text{ A}$ $R_{g} = 10 \Omega$ $V_{GE} = \pm 15 \text{ V}$	t <sub>f</sub>	-	193	-	
Turn-on switching loss	$V_{GE} = \pm 15V$	Eon	-	1.2	-	mJ
Turn-off switching loss		E <sub>off</sub>	-	1.3	-	
Total switching loss		E <sub>ts</sub>	-	2.5	_	
DIODE CHARACTERISTIC						
Forward voltage	$V_{GE} = 0 \text{ V}, I_F = 25 \text{ A}$	V <sub>F</sub>	-	2.51	3.00	V


Forward voltage	V <sub>GE</sub> = 0 V, I <sub>F</sub> = 25 A V <sub>GE</sub> = 0 V, I <sub>F</sub> = 25 A, T <sub>J</sub> = 175°C	VF		2.51 2.60	3.00	V
Reverse recovery time	$T_J = 25^{\circ}C$	t <sub>rr</sub>	I	136	-	ns
Reverse recovery charge	I <sub>F</sub> = 25 Å, V <sub>R</sub> = 400 V di <sub>F</sub> /dt = 250 Å/μs	Q <sub>rr</sub>	I	0.6	-	μC
Reverse recovery current		I <sub>rrm</sub>	I	8.4	-	А
Reverse recovery time	$T_{J} = 175^{\circ}C$	t <sub>rr</sub>	I	251	-	ns
Reverse recovery charge	I <sub>F</sub> = 25 A, V <sub>R</sub> = 400 V di <sub>F</sub> /dt = 250 A/μs	Q <sub>rr</sub>	-	1.91	-	μC
Reverse recovery current		I <sub>rrm</sub>	_	14	_	Α


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

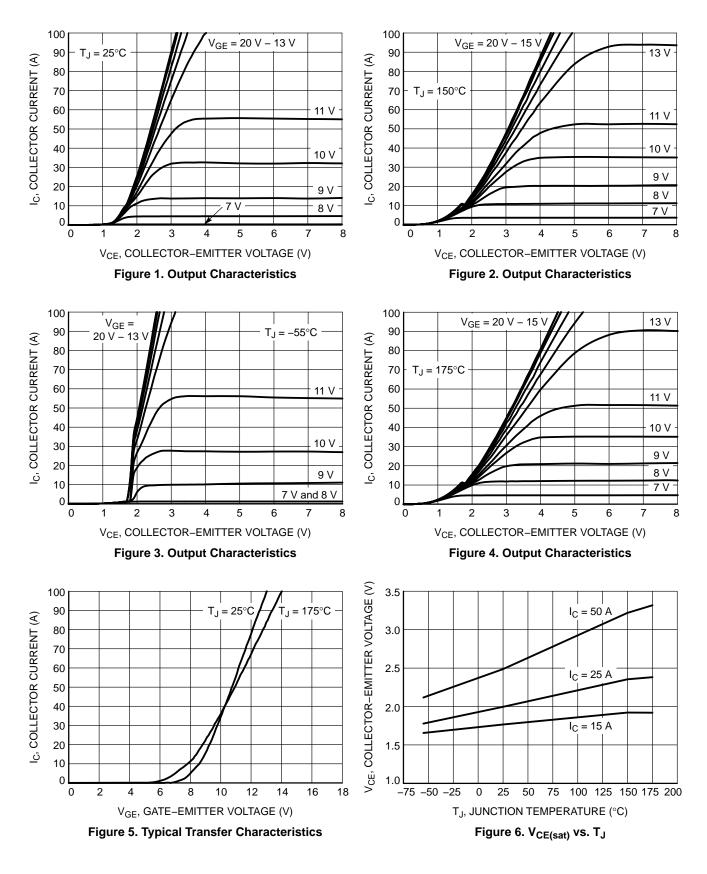

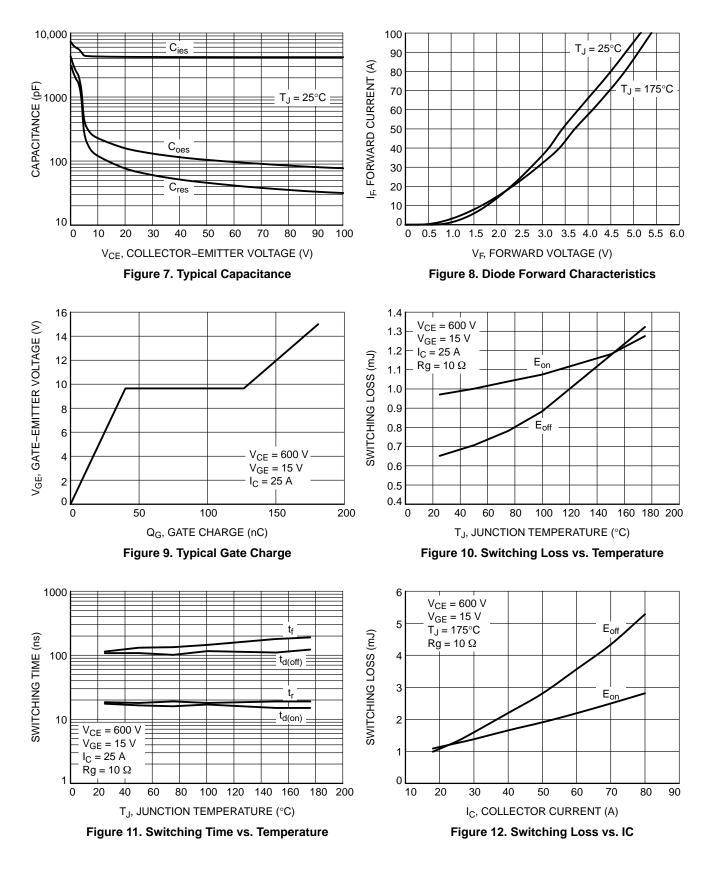

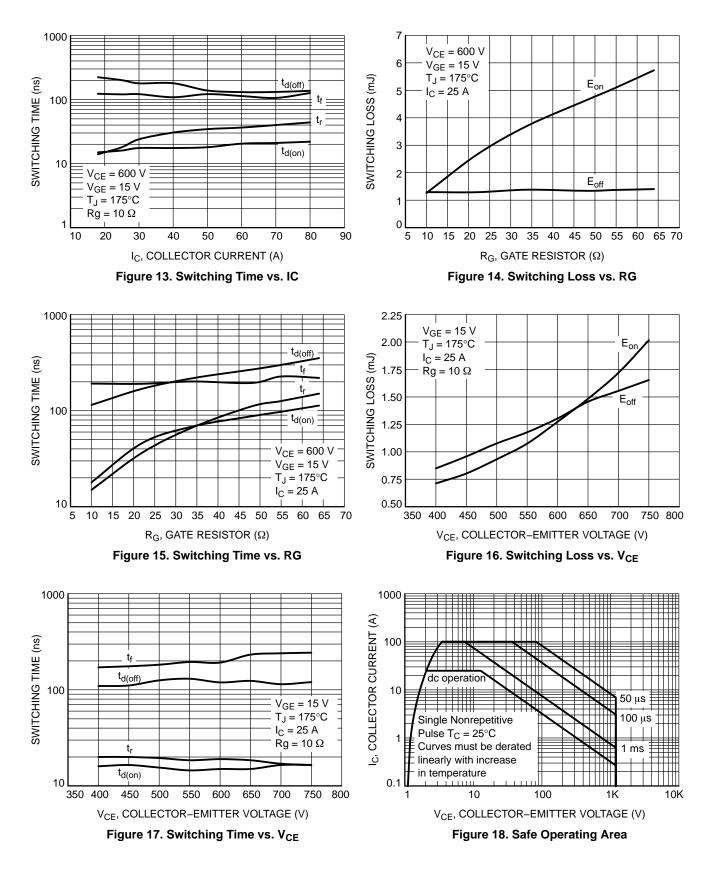

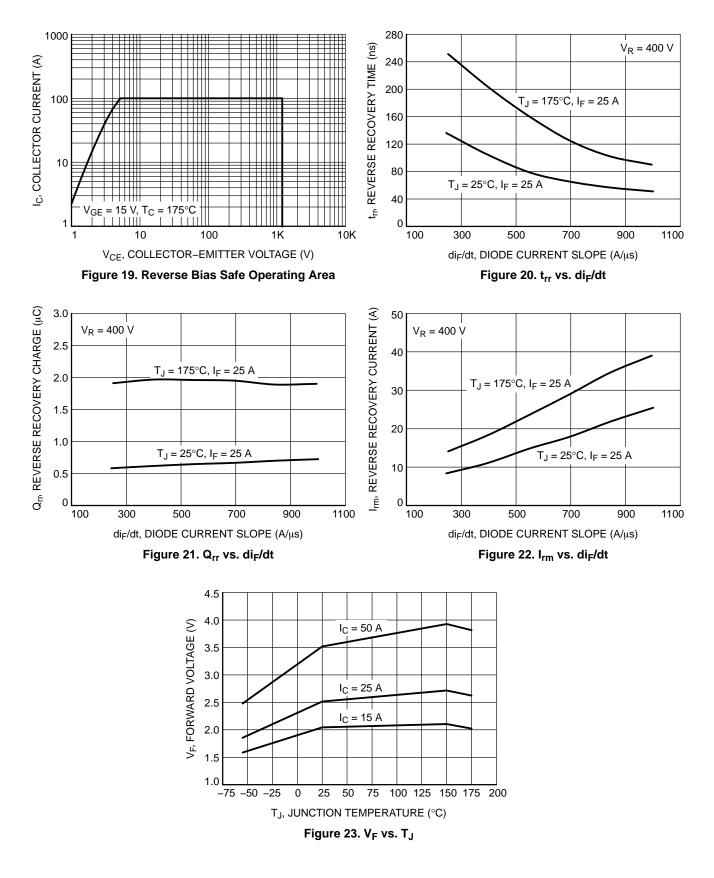

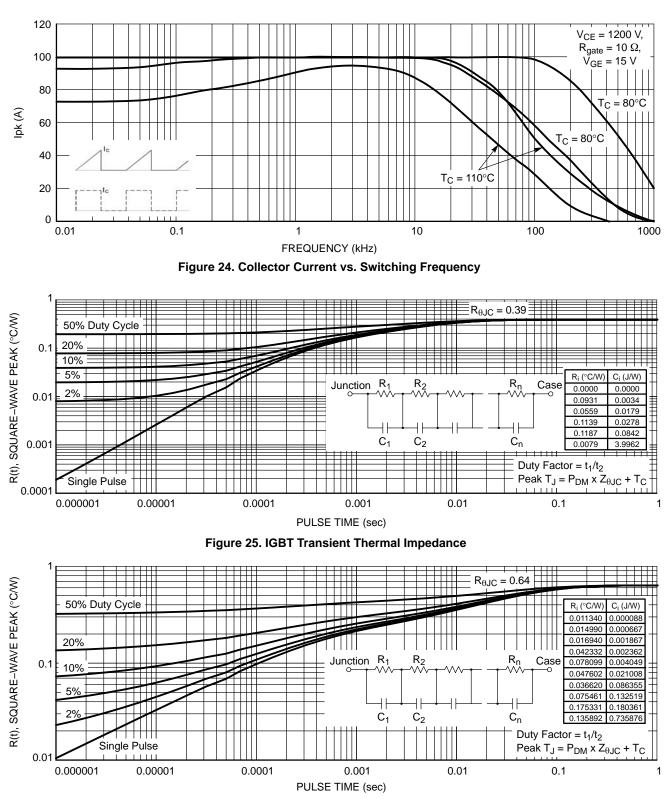



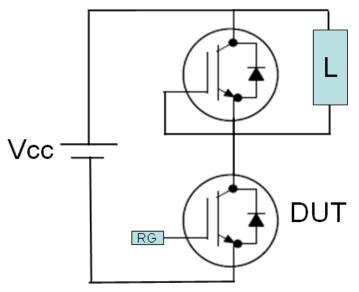


Figure 27. Test Circuit for Switching Characteristics

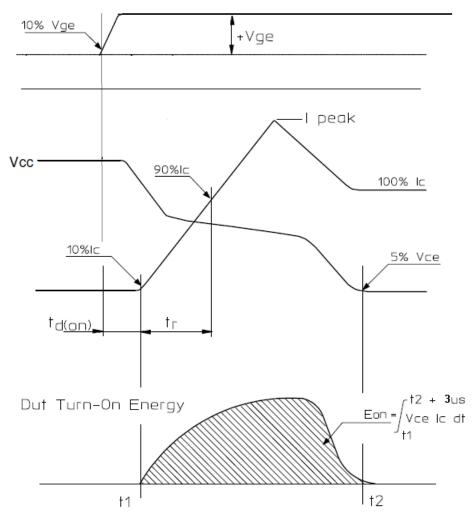


Figure 28. Definition of Turn On Waveform


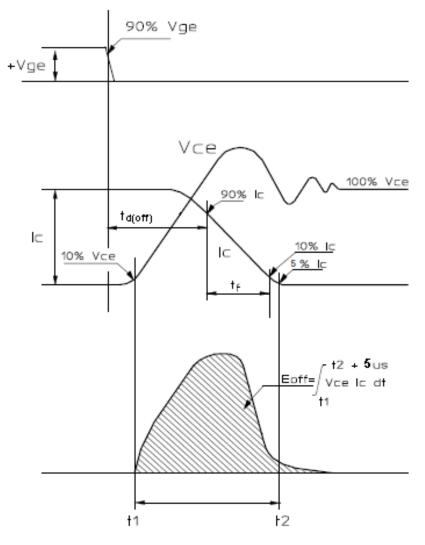


Figure 29. Definition of Turn Off Waveform

# onsemi

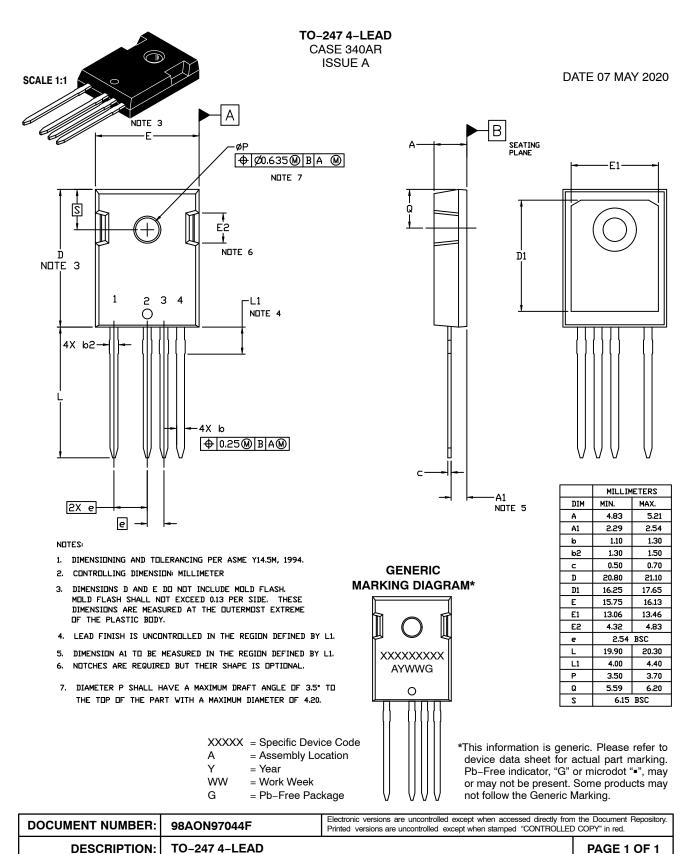

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent\_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

#### ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>