NRVBB1060, NRVBB1060W1

Switch-mode Power Rectifier

This switch–mode power rectifier uses the Schottky Barrier principle with a platinum barrier metal. This state–of–the–art device has the following features:

Features

- Low Forward Voltage
- 175°C Operating Junction Temperature
- Low Power Loss/High Efficiency
- High Surge Capacity
- For Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q101 Qualified and PPAP Capable
- This is a Pb–Free Device

Applications

- Power Supply Output Rectification
- Power Management


Mechanical Characteristics

- Case: Epoxy, Molded
- Epoxy Meets UL 94 V-0 @ 0.125 in
- Weight: 1.7 Grams (Approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds



ON Semiconductor®

www.onsemi.com

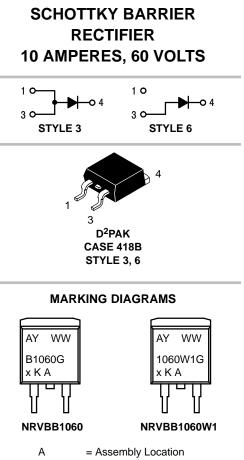

Y	= Year
WW	= Work Week
G	= Pb–Free Package
xKA	= Diode Polarity
х	= N or A

ORDERING INFORMATION

Device	Package	Shipping [†]
NRVBB1060T4G	D ² PAK (Pb–Free)	800/Tape & Reel
NRVBB1060W1T4G	D ² PAK (Pb–Free)	800/Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

NRVBB1060, NRVBB1060W1

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	60	V
Average Rectified Forward Current (Rated V_R) T_C = 133°C	I _{F(AV)}	10	А
Peak Repetitive Forward Current (Rated V _R , Square Wave, 20 kHz) T_C = 133°C	I _{FRM}	20	A
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I _{FSM}	150	A
Peak Repetitive Reverse Surge Current (2.0 µs, 1.0 kHz)	I _{RRM}	0.5	А
Operating Junction Temperature (Note 1)	TJ	-65 to +175	°C
Storage Temperature	T _{stg}	-65 to +175	°C
Voltage Rate of Change (Rated V _R)	dv/dt	10,000	V/µs


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected. 1. The heat generated must be less than the thermal conductivity from Junction–to–Ambient: $dP_D/dT_J < 1/R_{\theta JA}$.

THERMAL CHARACTERISTICS


Maximum Thermal Resistance, Junction-to-Case	R _{θJC}	2.0	°C/W
Maximum Thermal Resistance, Junction-to-Ambient	R _{θJA}	60	°C/W
ELECTRICAL CHARACTERISTICS			
$\label{eq:constant} \begin{array}{l} \mbox{Maximum Instantaneous Forward Voltage (Note 2)} \\ (i_F = 10 \mbox{ Amps, } T_C = 125^\circ C) \\ (i_F = 10 \mbox{ Amps, } T_C = 25^\circ C) \\ (i_F = 20 \mbox{ Amps, } T_C = 125^\circ C) \\ (i_F = 20 \mbox{ Amps, } T_C = 25^\circ C) \end{array}$	VF	0.7 0.8 0.85 0.95	V
Maximum Instantaneous Reverse Current (Note 2) (Rated dc Voltage, $T_C = 125^{\circ}C$) (Rated dc Voltage, $T_C = 25^{\circ}C$)	i _R	25 0.10	mA

2. Pulse Test: Pulse Width = 300 μ s, Duty Cycle \leq 2.0%.

NRVBB1060, NRVBB1060W1

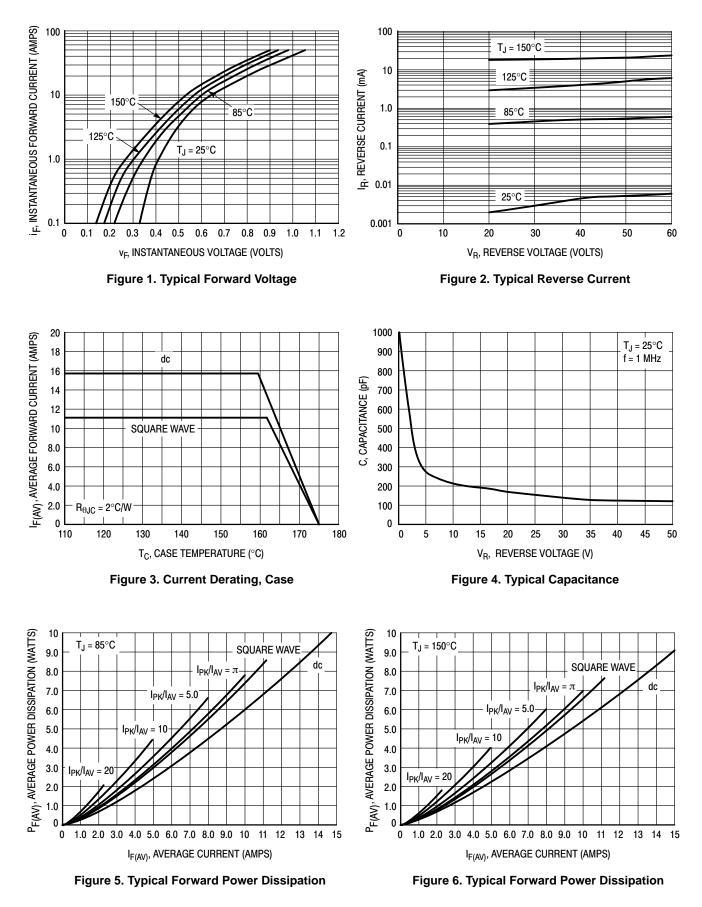


NRVBB1060, NRVBB1060W1



Curves, Various Mounting Conditions



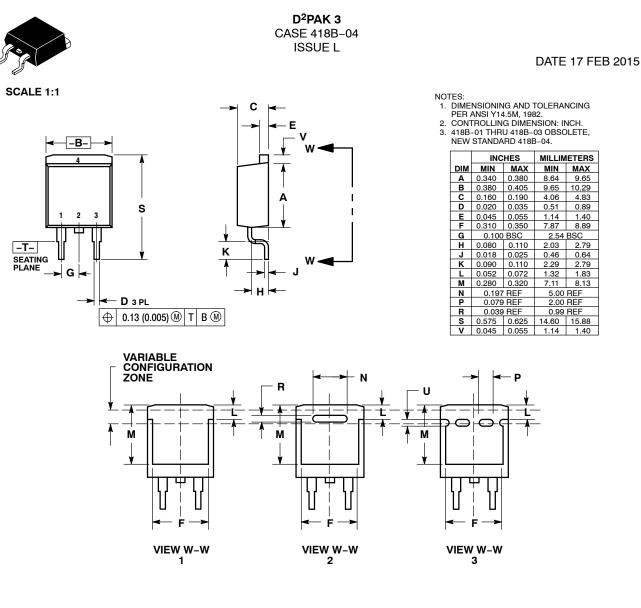

STYLE 1:	STYLE 2:	STYLE 3:	STYLE 4:	STYLE 5:	STYLE 6:
PIN 1. BASE	PIN 1. GATE	PIN 1. ANODE	PIN 1. GATE	PIN 1. CATHODE	PIN 1. NO CONNECT
2. COLLECTOR	2. DRAIN	2. CATHODE	2. COLLECTOR	2. ANODE	2. CATHODE
3. EMITTER	SOURCE	ANODE	3. EMITTER	CATHODE	3. ANODE
4. COLLECTOR	4. DRAIN	4. CATHODE	4. COLLECTOR	4. ANODE	4. CATHODE


MARKING INFORMATION AND FOOTPRINT ON PAGE 2

DOCUMENT NUMBER:	98ASB42761B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	D ² PAK 3		PAGE 1 OF 2		
ON Semiconductor and (1) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.					

D²PAK 3 CASE 418B-04 ISSUE L


DATE 17 FEB 2015

GENERIC MARKING DIAGRAM*

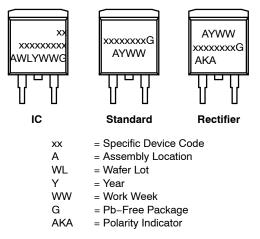

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " •", may or may not be present.

SOLDERING FOOTPRINT*



*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98ASB42761B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	D ² PAK 3		PAGE 2 OF 2	
ON Semiconductor and I are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.				

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>