

# 40 V, 2.0 A, Low V<sub>CE(sat)</sub> **PNP Transistor**


# NSS40200UW6T1G, **NSV40200UW6T1G**


onsemi's e<sup>2</sup>PowerEdge family of low V<sub>CE(sat)</sub> transistors are miniature surface mount devices featuring ultra low saturation voltage (V<sub>CE(sat)</sub>) and high current gain capability. These are designed for use in low voltage, high speed switching applications where affordable efficient energy control is important.

Typical applications are DC-DC converters and power management in portable and battery powered products such as cellular and cordless phones, PDAs, computers, printers, digital cameras and MP3 players. Other applications are low voltage motor controls in mass storage products such as disc drives and tape drives. In the automotive industry they can be used in air bag deployment and in the instrument cluster. The high current gain allows e<sup>2</sup>PowerEdge devices to be driven directly from PMU's control outputs, and the Linear Gain (Beta) makes them ideal components in analog amplifiers.

- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

# -40 VOLTS **2.0 AMPS** PNP LOW V<sub>CE(sat)</sub> TRANSISTOR EQUIVALENT $R_{DS(on)}$ 100 m $\Omega$





#### MARKING DIAGRAM



VA = Specific Device Code

= Date Code

= Pb-Free Package

(Note: Microdot may be in either location)

#### ORDERING INFORMATION

Device	Package	Shipping <sup>†</sup>
NSS40200UW6T1G	WDFN6 (Pb-Free)	3000/ Tape & Reel
NSV40200UW6T1G	WDFN6 (Pb-Free)	3000/ Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

1

#### **MAXIMUM RATINGS** $(T_A = 25^{\circ}C)$

Rating	Symbol	Max	Unit
Collector-Emitter Voltage	$V_{CEO}$	-40	Vdc
Collector-Base Voltage	$V_{CBO}$	-40	Vdc
Emitter-Base Voltage	V <sub>EBO</sub>	-7.0	Vdc
Collector Current – Continuous	Ι <sub>C</sub>	-2.0	Adc
Collector Current - Peak	I <sub>CM</sub>	-4.0	Α
Electrostatic Discharge	ESD	HBM Class 3B MM Class C	

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation, T <sub>A</sub> = 25°C Derate above 25°C	P <sub>D</sub> (Note 1)	875 7.0	mW mW/°C
Thermal Resistance, Junction-to-Ambient	R <sub>θJA</sub> (Note 1)	143	°C/W
Total Device Dissipation, T <sub>A</sub> = 25°C Derate above 25°C	P <sub>D</sub> (Note 2)	1.5 11.8	W mW/°C
Thermal Resistance, Junction-to-Ambient	R <sub>θJA</sub> (Note 2)	85	°C/W
Thermal Resistance, Junction-to-Lead #1	R <sub>θJL</sub> (Note 2)	23	°C/W
Total Device Dissipation (Single Pulse < 10 sec)	P <sub>Dsingle</sub> (Notes 2 & 3)	3.0	W
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. FR-4 @ 100 mm², 1 oz copper traces.
2. FR-4 @ 500 mm², 1 oz copper traces.
3. Thermal response.

#### **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typical	Max	Unit
OFF CHARACTERISTICS	<u> </u>		•	•	•
Collector – Emitter Breakdown Voltage (I <sub>C</sub> = -10 mAdc, I <sub>B</sub> = 0)	V <sub>(BR)CEO</sub>	-40	-	-	Vdc
Collector – Base Breakdown Voltage (I <sub>C</sub> = -0.1 mAdc, I <sub>E</sub> = 0)	V <sub>(BR)CBO</sub>	-40	-	-	Vdc
Emitter – Base Breakdown Voltage $(I_E = -0.1 \text{ mAdc}, I_C = 0)$	V <sub>(BR)EBO</sub>	-7.0	-	-	Vdc
Collector Cutoff Current (V <sub>CB</sub> = -40 Vdc, I <sub>E</sub> = 0)	Ісво	_	-	-0.1	μAdc
Emitter Cutoff Current (V <sub>EB</sub> = -7.0 Vdc)	I <sub>EBO</sub>	_	-	-0.1	μAdc
ON CHARACTERISTICS			•		
DC Current Gain (Note 4) ( $I_C = -10 \text{ mA}, V_{CE} = -2.0 \text{ V}$ ) ( $I_C = -500 \text{ mA}, V_{CE} = -2.0 \text{ V}$ ) ( $I_C = -1.0 \text{ A}, V_{CE} = -2.0 \text{ V}$ ) ( $I_C = -2.0 \text{ A}, V_{CE} = -2.0 \text{ V}$ )	h <sub>FE</sub>	150 150 150 150	- - - -	- - - -	
Collector – Emitter Saturation Voltage (Note 4) ( $I_C = -0.1 \text{ A}$ , $I_B = -0.010 \text{ A}$ ) (Note 5) ( $I_C = -1.0 \text{ A}$ , $I_B = -0.100 \text{ A}$ ) ( $I_C = -1.0 \text{ A}$ , $I_B = -0.010 \text{ A}$ ) ( $I_C = -2.0 \text{ A}$ , $I_B = -0.020 \text{ A}$ )	V <sub>CE(sat)</sub>	- - - -	- -0.100 - -	-0.020 -0.120 -0.200 -0.300	V
Base – Emitter Saturation Voltage (Note 4) (I <sub>C</sub> = -1.0 A, I <sub>B</sub> = -0.01 A)	V <sub>BE(sat)</sub>	_	-0.76	-0.900	V
Base – Emitter Turn–on Voltage (Note 4) $(I_C = -2.0 \text{ A}, V_{CE} = -3.0 \text{ V})$	V <sub>BE(on)</sub>	_	-0.80	-0.900	V
Cutoff Frequency ( $I_C = -100 \text{ mA}$ , $V_{CE} = -5.0 \text{ V}$ , $f = 100 \text{ MHz}$ )	f <sub>T</sub>	140	-	-	MHz
Input Capacitance (V <sub>EB</sub> = -0.5 V, f = 1.0 MHz)	Cibo	-		500	pF
Output Capacitance (V <sub>CB</sub> = -3.0 V, f = 1.0 MHz)	Cobo	_		100	pF
SWITCHING CHARACTERISTICS					
Delay (V <sub>CC</sub> = 30 V, I <sub>C</sub> = 750 mA, I <sub>B1</sub> = 15 mA)	t <sub>d</sub>	1	_	70	ns
Rise ( $V_{CC} = 30 \text{ V}, I_C = 750 \text{ mA}, I_{B1} = 15 \text{ mA}$ )	t <sub>r</sub>	-	-	150	ns
Storage ( $V_{CC} = 30 \text{ V}, I_{C} = 750 \text{ mA}, I_{B1} = 15 \text{ mA}$ )	t <sub>s</sub>	-	-	525	ns
Fall (V <sub>CC</sub> = 30 V, I <sub>C</sub> = 750 mA, I <sub>B1</sub> = 15 mA)	t <sub>f</sub>	-	-	155	ns
			_		

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Pulsed Condition: Pulse Width = 300 μsec, Duty Cycle ≤ 2%.

5. Guaranteed by design but not tested.

#### TYPICAL CHARACTERISTICS

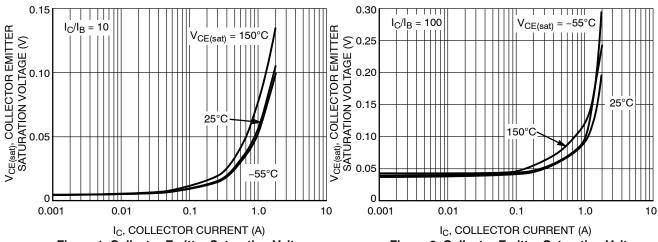


Figure 1. Collector Emitter Saturation Voltage vs. Collector Current

Figure 2. Collector Emitter Saturation Voltage vs. Collector Current




Figure 3. DC Current Gain vs. **Collector Current** 




Figure 4. Base Emitter Saturation Voltage vs. **Collector Current** 




Figure 5. Base Emitter Turn-On Voltage vs. **Collector Current** 


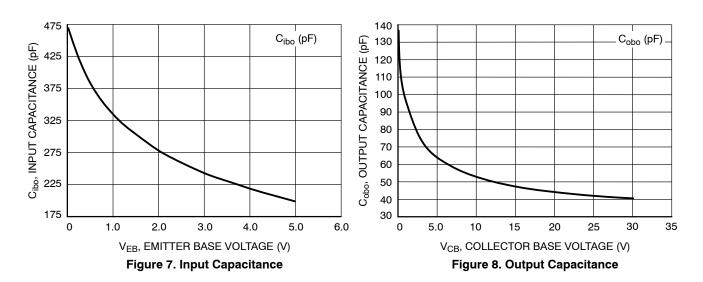


Figure 6. Saturation Region

#### **TYPICAL CHARACTERISTICS**






Figure 9. PNP Safe Operating Area



SCALE 4:1

**WDFN6 2x2** CASE 506AP **ISSUE B** 

**DATE 26 APR 2006** 

- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ASME
- 2. CONTROLLING DIMENSION: MILLIMETERS.
- 3. DIMENSION & APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.20mm FROM TERMINAL.
- 4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.
- CENTER TERMINAL LEAD IS OPTIONAL. TERMINAL LEAD IS CONNECTED TO TERMINAL LEAD # 4.
- 2. PINS 1, 2, 5 AND 6 ARE TIED TO THE FLAG.

	MILLIMETERS			
DIM	MIN	MAX		
Α	0.70	0.80		
A1	0.00	0.05		
A3	0.20 REF			
b	0.25	0.35		
b1	0.51	0.61		
D	2.00 BSC			
D2	1.00	1.20		
E	2.00 BSC			
E2	1.10 1.30			
е	0.65 BSC			
K	0.15 REF			
L	0.20	0.30		
L2	0.20	0.30		
J	0.27 REF			
J1	0.65 REF			


#### **GENERIC MARKING DIAGRAM\***



XX = Specific Device Code = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.


#### **SOLDERMASK DEFINED** MOUNTING FOOTPRINT



DOCUMENT NUMBER:	98AON20860D	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	6 PIN WDFN 2X2, 0.65P		PAGE 1 OF 1	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

# В F PIN ONE REFERENCE $\Box$ 0.10 C 0.10



STYLE 1:

- PIN 1. DRAIN
  - DRAIN 2.
  - GATE
  - SOURCE DRAIN
  - 5. 6. DRAIN
- STYLE 2:

**BOTTOM VIEW** 

PIN 1. COLLECTOR

С 0.05

NOTE 3

- COLLECTOR 2.
- 3. BASE
- EMITTER COLLECTOR
- 5.
- COLLECTOR

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales