

# NTB5411N, NTP5411N

## Power MOSFET 80 Amps, 60 Volts N-Channel D<sup>2</sup>PAK, TO-220

### Features

- Low  $R_{DS(on)}$
- High Current Capability
- Avalanche Energy Specified
- These are Pb-Free Devices

### Applications

- LED Lighting and LED Backlight Drivers
- DC-DC Converters
- DC Motor Drivers
- Power Supplies Secondary Side Synchronous Rectification

### MAXIMUM RATINGS ( $T_J = 25^\circ\text{C}$ Unless otherwise specified)

| Parameter   |                        |                           | Symbol         | Value      | Unit             |
|---|------------------------|---------------------------|----------------|------------|------------------|
| Drain-to-Source Voltage   |                        |                           | $V_{DSS}$      | 60         | V                |
| Gate-to-Source Voltage – Continuous   |                        |                           | $V_{GS}$       | $\pm 20$   | V                |
| Gate-to-Source Voltage – Nonrepetitive ( $T_P < 10 \mu\text{s}$ )   |                        |                           | $V_{GS}$       | $\pm 30$   | V                |
| Continuous Drain Current $R_{\theta JC}$ (Note 1)   | Steady State           | $T_C = 25^\circ\text{C}$  | $I_D$          | 80         | A                |
|   |                        | $T_C = 100^\circ\text{C}$ |                | 61         |                  |
| Power Dissipation $R_{\theta JC}$ (Note 1)  | Steady State           | $T_C = 25^\circ\text{C}$  | $P_D$          | 166        | W                |
| Pulsed Drain Current  | $t_p = 10 \mu\text{s}$ |                           | $I_{DM}$       | 185        | A                |
| Operating and Storage Temperature Range   |                        |                           | $T_J, T_{stg}$ | -55 to 175 | $^\circ\text{C}$ |
| Source Current (Body Diode)   |                        |                           | $I_S$          | 75         | A                |
| Single Pulse Drain-to-Source Avalanche Energy – Starting $T_J = 25^\circ\text{C}$ ( $V_{DD} = 50 V_{dc}, V_{GS} = 10 V_{dc}, I_{L(pk)} = 75 \text{ A}, L = 0.1 \text{ mH}, R_G = 25 \Omega$ ) |                        |                           | $E_{AS}$       | 280        | mJ               |
| Lead Temperature for Soldering Purposes, 1/8" from Case for 10 Seconds  |                        |                           | $T_L$          | 260        | $^\circ\text{C}$ |

### THERMAL RESISTANCE RATINGS

| Parameter                                      | Symbol          | Max | Unit                      |
|--|-----------------|-----|---------------------------|
| Junction-to-Case (Drain) Steady State (Note 1) | $R_{\theta JC}$ | 0.9 | $^\circ\text{C}/\text{W}$ |
|  | $R_{\theta JA}$ | 43  |                           |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Surface mounted on FR4 board using 1 sq in pad size, (Cu Area 1.127 sq in [1 oz] including traces).





ON Semiconductor®


<http://onsemi.com>

| $V_{(BR)DSS}$ | $R_{DS(ON)} \text{ MAX}$ | $I_D \text{ MAX}$ (Note 1) |
|---------------|--------------------------|----------------------------|
| 60 V          | 10 m $\Omega$ @ 10 V     | 80 A                       |

### N-Channel




TO-220AB  
CASE 221A  
STYLE 5



D<sup>2</sup>PAK  
CASE 418B  
STYLE 2

### MARKING DIAGRAM & PIN ASSIGNMENT

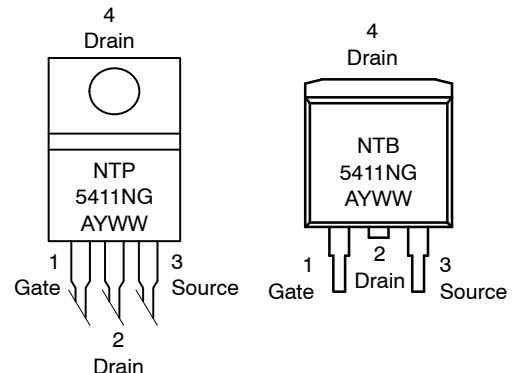

G = Pb-Free Device  
A = Assembly Location  
Y = Year  
WW = Work Week

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

# NTB5411N, NTP5411N

## ELECTRICAL CHARACTERISTICS (T<sub>J</sub> = 25°C Unless otherwise specified)

| Characteristics | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------------|--------|----------------|-----|-----|-----|------|
|-----------------|--------|----------------|-----|-----|-----|------|

### OFF CHARACTERISTICS

|   |                                      |   |                        |      |      |       |
|---|--------------------------------------|---|------------------------|------|------|-------|
| Drain-to-Source Breakdown Voltage                         | V <sub>(BR)DSS</sub>                 | V <sub>DS</sub> = 0 V, I <sub>D</sub> = 250 μA  | 60                     |      |      | V     |
| Drain-to-Source Breakdown Voltage Temperature Coefficient | V <sub>(BR)DSS</sub> /T <sub>J</sub> |   |                        | 54.2 |      | mV/°C |
| Zero Gate Voltage Drain Current                           | I <sub>DSS</sub>                     | V <sub>GS</sub> = 0 V<br>V <sub>DS</sub> = 60 V | T <sub>J</sub> = 25°C  |      | 10   | μA    |
|   |                                      |   | T <sub>J</sub> = 150°C |      | 100  |       |
| Gate-Body Leakage Current                                 | I <sub>GSS</sub>                     | V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ±20 V  |                        |      | ±100 | nA    |

### ON CHARACTERISTICS (Note 2)

|  |                                     |   |     |      |      |       |
|--|-------------------------------------|---|-----|------|------|-------|
| Gate Threshold Voltage                     | V <sub>GS(th)</sub>                 | V <sub>GS</sub> = V <sub>DS</sub> , I <sub>D</sub> = 250 μA | 2.0 | 3.2  | 4.0  | V     |
| Negative Threshold Temperature Coefficient | V <sub>GS(th)</sub> /T <sub>J</sub> |   |     | 6.6  |      | mV/°C |
| Drain-to-Source On Voltage                 | V <sub>DS(on)</sub>                 | V <sub>GS</sub> = 10 V, I <sub>D</sub> = 80 A               |     | 0.71 | 0.92 | V     |
|  |                                     | V <sub>GS</sub> = 10 V, I <sub>D</sub> = 40 A, 150°C        |     | 0.65 |      |       |
| Static Drain-to-Source On-Resistance       | R <sub>DS(on)</sub>                 | V <sub>GS</sub> = 10 V, I <sub>D</sub> = 40 A               |     | 8.4  | 10   | mΩ    |
| Forward Transconductance                   | g <sub>FS</sub>                     | V <sub>GS</sub> = 15 V, I <sub>D</sub> = 40 A               |     | 70   |      | S     |

### CHARGES, CAPACITANCES & GATE RESISTANCE

|                       |                     |  |  |      |      |    |
|-----------------------|---------------------|--|--|------|------|----|
| Input Capacitance     | C <sub>iss</sub>    | V <sub>DS</sub> = 25 V, V <sub>GS</sub> = 0 V,<br>f = 1 MHz              |  | 3365 | 4500 | pF |
| Output Capacitance    | C <sub>oss</sub>    |  |  | 615  |      |    |
| Transfer Capacitance  | C <sub>rss</sub>    |  |  | 230  |      |    |
| Total Gate Charge     | Q <sub>G(TOT)</sub> | V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 48 V,<br>I <sub>D</sub> = 80 A |  | 92   | 130  | nC |
| Threshold Gate Charge | Q <sub>G(TH)</sub>  |  |  | 4.1  |      |    |
| Gate-to-Source Charge | Q <sub>GS</sub>     |  |  | 19   |      |    |
| Gate-to-Drain Charge  | Q <sub>GD</sub>     |  |  | 43   |      |    |

### SWITCHING CHARACTERISTICS, V<sub>GS</sub> = 10 V (Note 3)

|                     |                     |  |  |     |  |    |
|---------------------|---------------------|--|--|-----|--|----|
| Turn-On Delay Time  | t <sub>d(on)</sub>  | V <sub>GS</sub> = 10 V, V <sub>DD</sub> = 48 V,<br>I <sub>D</sub> = 80 A, R <sub>G</sub> = 9.1 Ω |  | 22  |  | ns |
| Rise Time           | t <sub>r</sub>      |  |  | 122 |  |    |
| Turn-Off Delay Time | t <sub>d(off)</sub> |  |  | 116 |  |    |
| Fall Time           | t <sub>f</sub>      |  |  | 113 |  |    |

### DRAIN-SOURCE DIODE CHARACTERISTICS

|                                |                 |   |                        |      |      |     |                 |
|--------------------------------|-----------------|---|------------------------|------|------|-----|-----------------|
| Forward Diode Voltage          | V <sub>SD</sub> | V <sub>GS</sub> = 0 V<br>I <sub>S</sub> = 37.5 A  | T <sub>J</sub> = 25°C  |      | 0.91 | 1.1 | V <sub>dc</sub> |
|                                |                 |   | T <sub>J</sub> = 150°C |      | 0.8  |     |                 |
| Reverse Recovery Time          | t <sub>rr</sub> | I <sub>S</sub> = 37.5 A <sub>dc</sub> , V <sub>GS</sub> = 0 V <sub>dc</sub> ,<br>di <sub>S</sub> /dt = 100 A/μs |                        | 62   |      | ns  |                 |
| Charge Time                    | t <sub>a</sub>  |   |                        | 43   |      |     |                 |
| Discharge Time                 | t <sub>b</sub>  |   |                        | 19   |      |     |                 |
| Reverse Recovery Stored Charge | Q <sub>RR</sub> |   |                        | 0.15 |      |     | μC              |

2. Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.

3. Switching characteristics are independent of operating junction temperatures.

TYPICAL PERFORMANCE CURVES

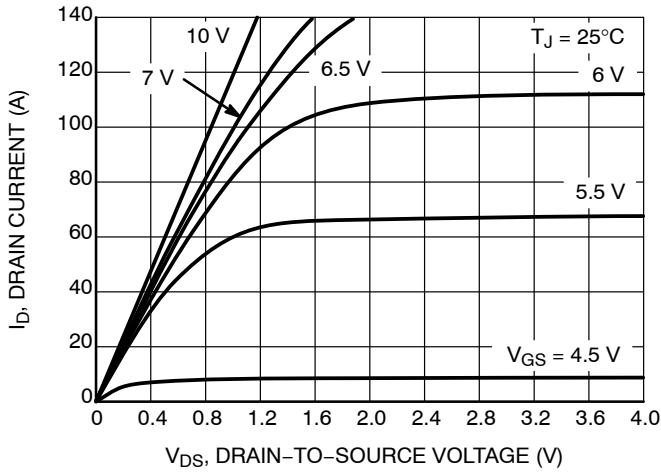


Figure 1. On-Region Characteristics

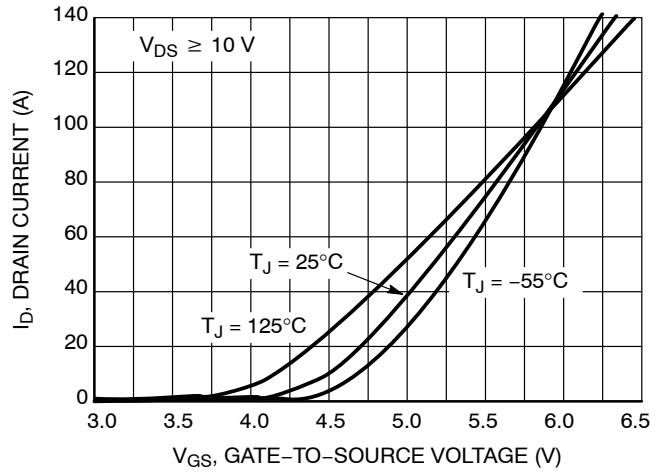


Figure 2. Transfer Characteristics

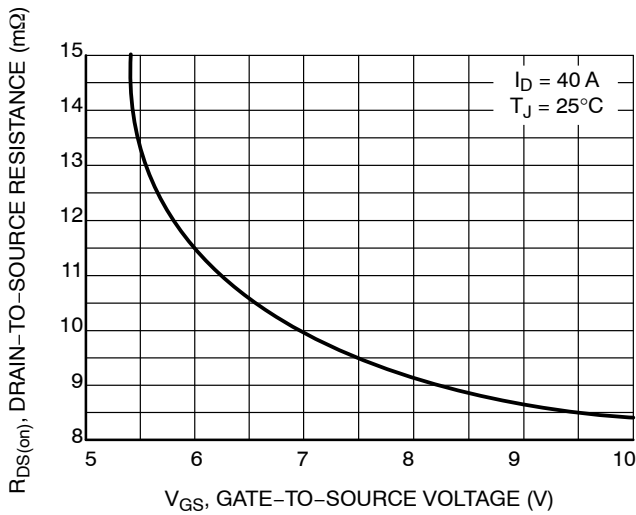


Figure 3. On-Resistance vs. Gate-to-Source Voltage

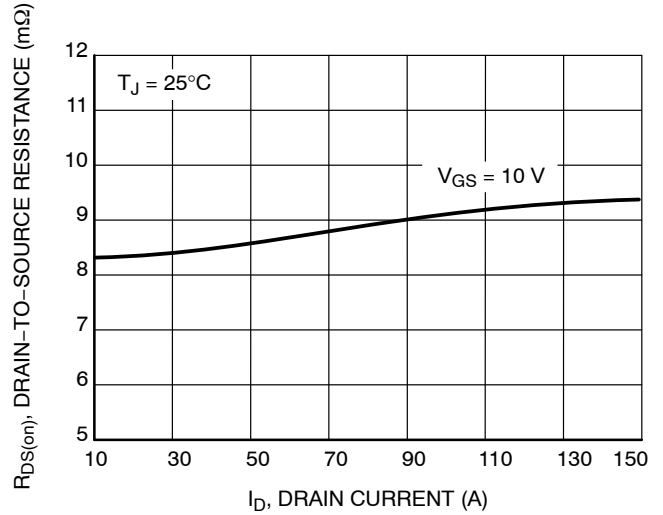


Figure 4. On-Resistance vs. Drain Current and Gate Voltage

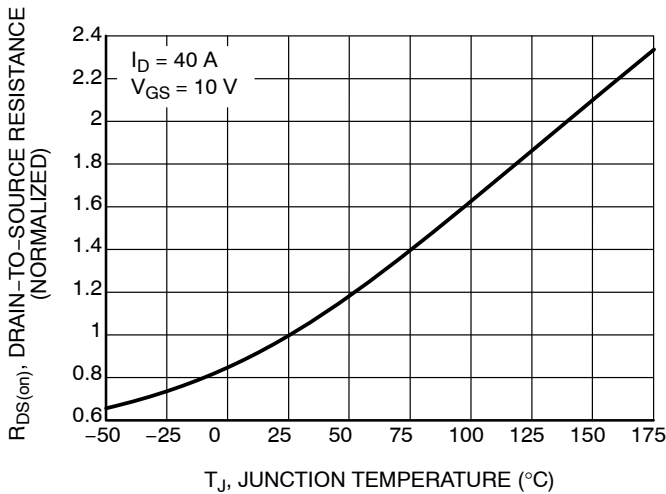


Figure 5. On-Resistance Variation with Temperature

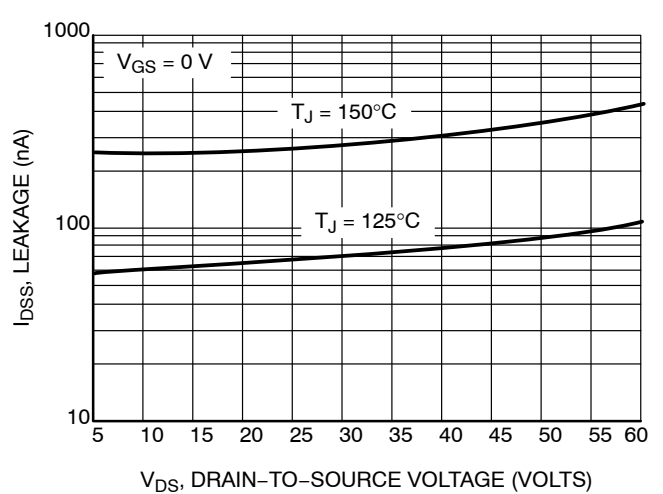


Figure 6. Drain-to-Source Leakage Current vs. Voltage

# NTB5411N, NTP5411N

## TYPICAL PERFORMANCE CURVES

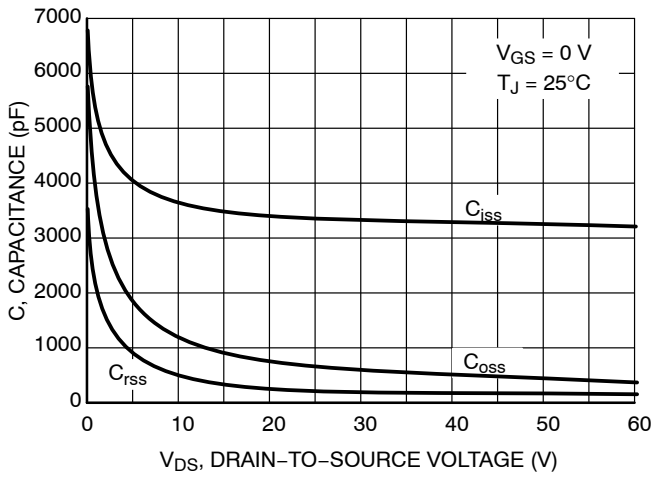


Figure 7. Capacitance Variation

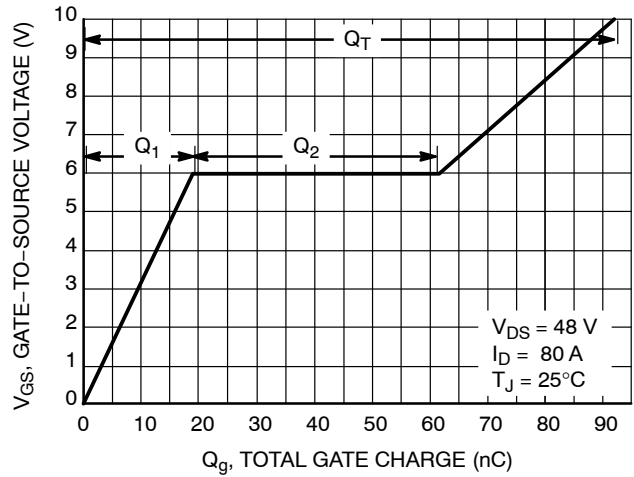


Figure 8. Gate-to-Source Voltage vs. Total Charge

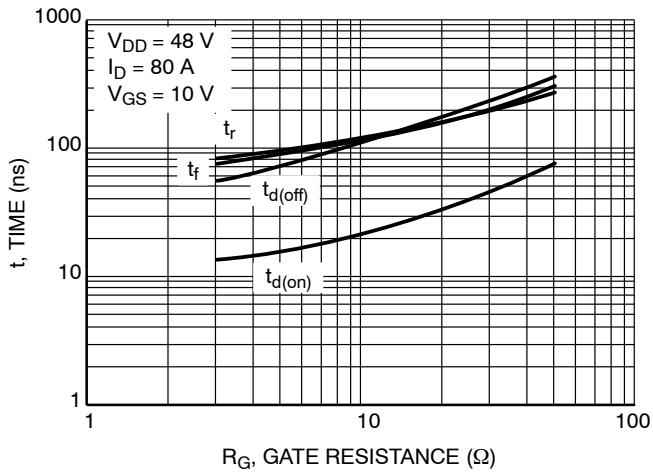


Figure 9. Resistive Switching Time Variation vs. Gate Resistance

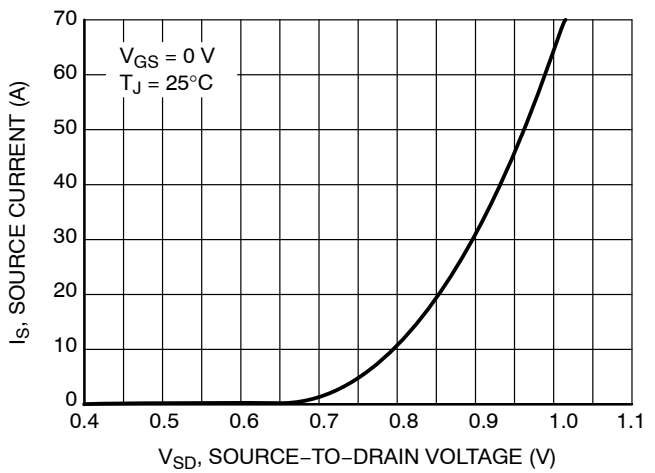


Figure 10. Diode Forward Voltage vs. Current

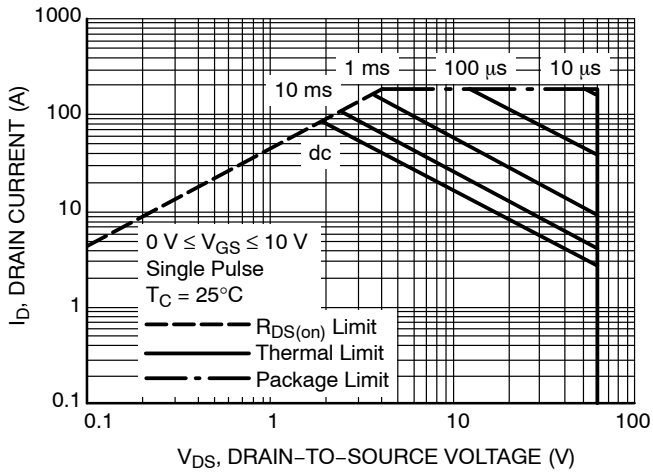


Figure 11. Maximum Rated Forward Biased Safe Operating Area

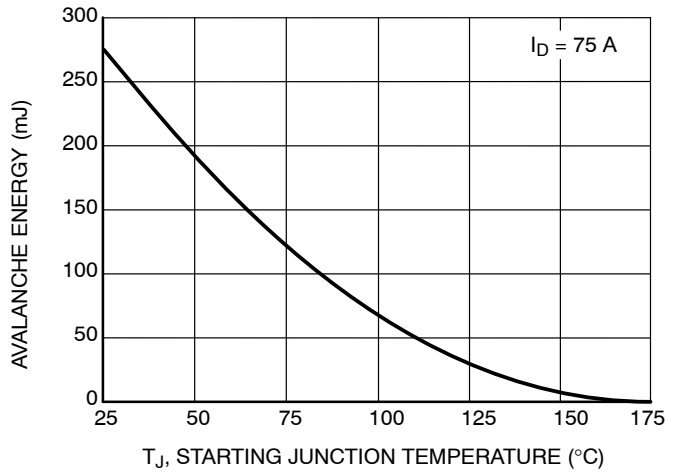
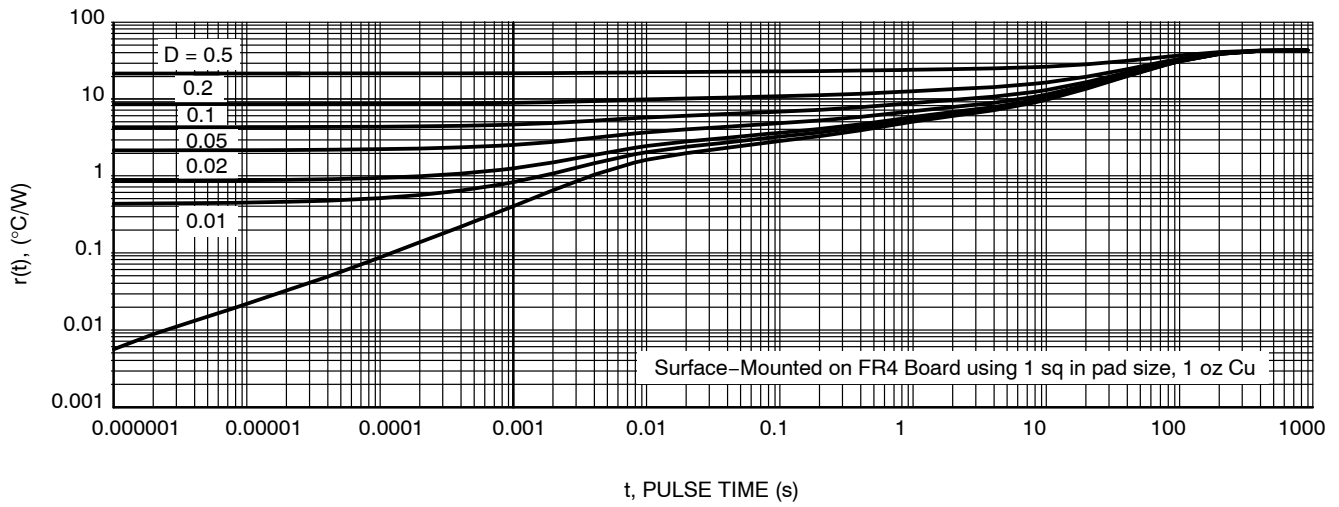


Figure 12. Maximum Avalanche Energy vs. Starting Junction Temperature

# NTB5411N, NTP5411N

## TYPICAL PERFORMANCE CURVES



**Figure 13. Thermal Response**

### ORDERING INFORMATION

| Device      | Package                         | Shipping <sup>†</sup> |
|-------------|---------------------------------|-----------------------|
| NTP5411NG   | TO-220AB<br>(Pb-Free)           | 50 Units / Rail       |
| NTB5411NT4G | D <sup>2</sup> PAK<br>(Pb-Free) | 800 / Tape & Reel     |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# MECHANICAL CASE OUTLINE

## PACKAGE DIMENSIONS

ON Semiconductor®



**D<sup>2</sup>PAK 3**  
CASE 418B-04  
ISSUE L

DATE 17 FEB 2015


SCALE 1:1



- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. 418B-01 THRU 418B-03 OBSOLETE, NEW STANDARD 418B-04.

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 0.340  | 0.380 | 8.64        | 9.65  |
| B   | 0.380  | 0.405 | 9.65        | 10.29 |
| C   | 0.160  | 0.190 | 4.06        | 4.83  |
| D   | 0.020  | 0.035 | 0.51        | 0.89  |
| E   | 0.045  | 0.055 | 1.14        | 1.40  |
| F   | 0.310  | 0.350 | 7.87        | 8.89  |
| G   | 0.100  | BSC   | 2.54        | BSC   |
| H   | 0.080  | 0.110 | 2.03        | 2.79  |
| J   | 0.018  | 0.025 | 0.46        | 0.64  |
| K   | 0.090  | 0.110 | 2.29        | 2.79  |
| L   | 0.052  | 0.072 | 1.32        | 1.83  |
| M   | 0.280  | 0.320 | 7.11        | 8.13  |
| N   | 0.197  | REF   | 5.00        | REF   |
| P   | 0.079  | REF   | 2.00        | REF   |
| R   | 0.039  | REF   | 0.99        | REF   |
| S   | 0.575  | 0.625 | 14.60       | 15.88 |
| V   | 0.045  | 0.055 | 1.14        | 1.40  |

VARIABLE CONFIGURATION ZONE

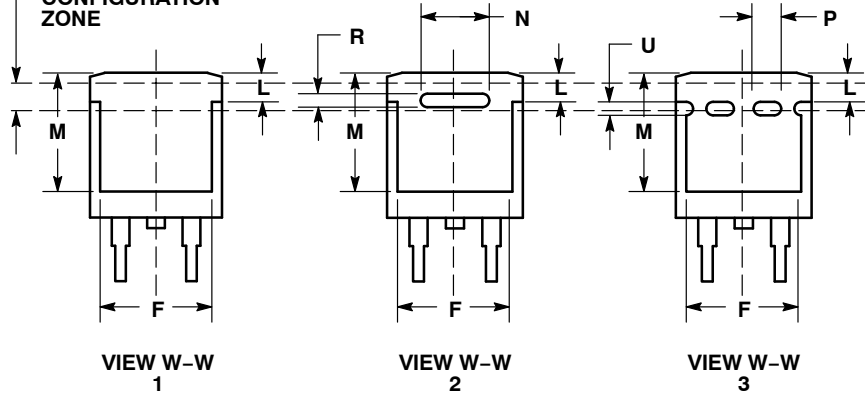

- |   |  |  |   |  |   |
|---|--|--|---|--|---|
| STYLE 1:<br>PIN 1. BASE<br>2. COLLECTOR<br>3. EMITTER<br>4. COLLECTOR | STYLE 2:<br>PIN 1. GATE<br>2. DRAIN<br>3. SOURCE<br>4. DRAIN | STYLE 3:<br>PIN 1. ANODE<br>2. CATHODE<br>3. ANODE<br>4. CATHODE | STYLE 4:<br>PIN 1. GATE<br>2. COLLECTOR<br>3. EMITTER<br>4. COLLECTOR | STYLE 5:<br>PIN 1. CATHODE<br>2. ANODE<br>3. CATHODE<br>4. ANODE | STYLE 6:<br>PIN 1. NO CONNECT<br>2. CATHODE<br>3. ANODE<br>4. CATHODE |
|---|--|--|---|--|---|

### MARKING INFORMATION AND FOOTPRINT ON PAGE 2

|                         |                           |  |
|-------------------------|---------------------------|--|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42761B</b>        | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>D<sup>2</sup>PAK 3</b> | <b>PAGE 1 OF 2</b>   |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

**D<sup>2</sup>PAK 3**  
CASE 418B-04  
ISSUE L

DATE 17 FEB 2015

**GENERIC  
MARKING DIAGRAM\***



- xx = Specific Device Code
- A = Assembly Location
- WL = Wafer Lot
- Y = Year
- WW = Work Week
- G = Pb-Free Package
- AKA = Polarity Indicator

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present.

**SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                         |                           |  |
|-------------------------|---------------------------|--|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42761B</b>        | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>D<sup>2</sup>PAK 3</b> | <b>PAGE 2 OF 2</b>   |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)

