

NTMFS5C430N MOSFET – Power, Single, N-Channel 40 V, 1.7 m Ω , 185 A

Features

- Small Footprint (5x6 mm) for Compact Design
- Low R_{DS(on)} to Minimize Conduction Losses
- Low Q_G and Capacitance to Minimize Driver Losses
- These Devices are Pb-Free and are RoHS Compliant

MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)

Parameter			Symbol	Valuef	Unit
Drain-to-Source Voltage			V _{DSS}	40	V
Gate-to-Source Voltage	9		V _{GS}	±20	V
Continuous Drain		T _C = 25°C	I _D	185	Α
Current R _{0JC} (Notes 1, 3)	Steady	T _C = 100°C	1	131	
Power Dissipation	State	T _C = 25°C	P_{D}	106	W
R _{θJC} (Note 1)		T _C = 100°C		53	
Continuous Drain		T _A = 25°C	I _D	35	Α
Current R _{0JA} (Notes 1, 2, 3)	Steady State	T _A = 100°C		25	
Power Dissipation R _{0JA} (Notes 1 & 2)		T _A = 25°C	P_{D}	3.8	W
		T _A = 100°C	1	1.9	
Pulsed Drain Current	$T_A = 25^{\circ}C$, $t_p = 10 \mu s$		I _{DM}	900	Α
Operating Junction and Storage Temperature			T _J , T _{stg}	-55 to + 175	°C
Source Current (Body Diode)			Is	102	Α
Single Pulse Drain-to-Source Avalanche Energy (I _{L(pk)} = 15 A)			E _{AS}	338	mJ
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			TL	260	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL RESISTANCE MAXIMUM RATINGS


Parameter	Symbol	Value	Unit
Junction-to-Case - Steady State	$R_{\theta JC}$	1.4	°C/W
Junction-to-Ambient - Steady State (Note 2)	$R_{\theta JA}$	40	

- The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
- 2. Surface-mounted on FR4 board using a 650 mm², 2 oz. Cu pad.
- Maximum current for pulses as long as 1 second is higher but is dependent on pulse duration and duty cycle.

V _{(BR)DSS}	R _{DS(ON)} MAX	I _D MAX
40 V	1.7 m Ω @ 10 V	185 A







5C430N = NTMFS5C430N A = Assembly Location

Y = Year
W = Work Week
ZZ = Lot Traceability

ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 5 of this data sheet.

NOTE: Some of the device on this data sheet have been **DISCONTINUED**. Please refer to the table on page 5.

ELECTRICAL CHARACTERISTICS ($T_J = 25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Test Condition		Min	Тур	Max	Unit
OFF CHARACTERISTICS				•	•		
Drain-to-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D =	250 μΑ	40			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	V _{(BR)DSS} / T _J				12.8		mV/°C
Zero Gate Voltage Drain Current	I _{DSS}	V _{GS} = 0 V, T _J = 25 °C				10	
		V _{DS} = 40 V	T _J = 125°C			100	μΑ
Gate-to-Source Leakage Current	I _{GSS}	V _{DS} = 0 V, V _{GS}	= 20 V			100	nA
ON CHARACTERISTICS (Note 4)							
Gate Threshold Voltage	V _{GS(TH)}	$V_{GS} = V_{DS}, I_D =$	= 250 μA	2.5		3.5	V
Threshold Temperature Coefficient	V _{GS(TH)} /T _J				-8.2		mV/°C
Drain-to-Source On Resistance	R _{DS(on)}	V _{GS} = 10 V	I _D = 50 A		1.4	1.7	mΩ
Forward Transconductance	9 _{FS}	V _{DS} =15 V, I _D	= 50 A		130		S
CHARGES, CAPACITANCES & GATE RE	SISTANCE						
Input Capacitance	C _{ISS}	V _{GS} = 0 V, f = 1 MHz, V _{DS} = 25 V			3300		
Output Capacitance	C _{OSS}				1600		pF
Reverse Transfer Capacitance	C _{RSS}				45		
Total Gate Charge	Q _{G(TOT)}	V _{GS} = 10 V, V _{DS} = 20 V; I _D = 50 A			47		nC
Threshold Gate Charge	Q _{G(TH)}	V _{GS} = 10 V, V _{DS} = 20 V; I _D = 50 A			10		
Gate-to-Source Charge	Q _{GS}				16		
Gate-to-Drain Charge	Q_{GD}				7		
Plateau Voltage	V _{GP}				4.7		V
SWITCHING CHARACTERISTICS (Note 5)						
Turn-On Delay Time	t _{d(ON)}				13		
Rise Time	t _r	V _{GS} = 10 V, V _{DS}	s = 20 V,		48]
Turn-Off Delay Time	t _{d(OFF)}	$I_D = 50 \text{ A}, R_G = 2.5 \Omega$			29		ns -
Fall Time	t _f				8		
DRAIN-SOURCE DIODE CHARACTERIS	TICS						
Forward Diode Voltage	V _{SD}	V _{GS} = 0 V,	T _J = 25°C		0.83	1.2	
		I _S = 50 A	50 A		V		
Reverse Recovery Time	t _{RR}	V_{GS} = 0 V, dIS/dt = 100 A/ μ s, I_{S} = 50 A			57		
Charge Time	ta				30		ns
Discharge Time	t _b				27		1
Reverse Recovery Charge	Q _{RR}				68		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 4. Pulse Test: pulse width \leq 300 μ s, duty cycle \leq 2%.

^{5.} Switching characteristics are independent of operating junction temperatures.

TYPICAL CHARACTERISTICS

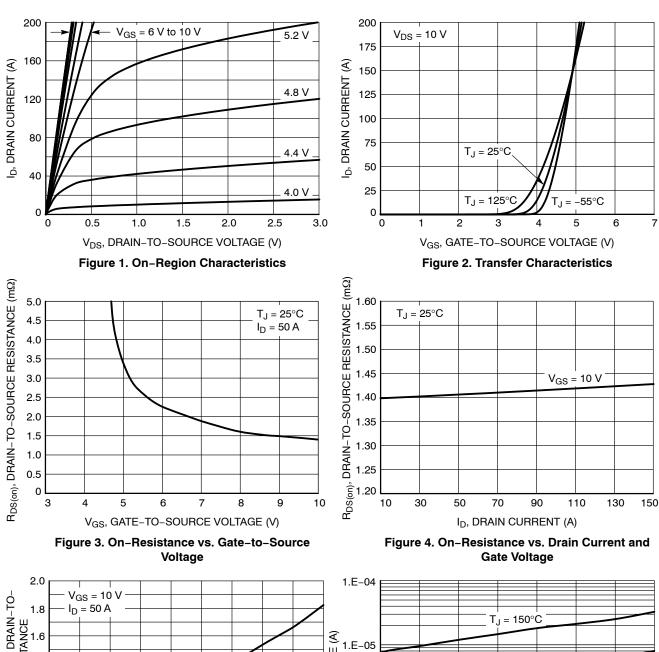


Figure 5. On–Resistance Variation with Temperature




Figure 6. Drain-to-Source Leakage Current vs. Voltage

TYPICAL CHARACTERISTICS

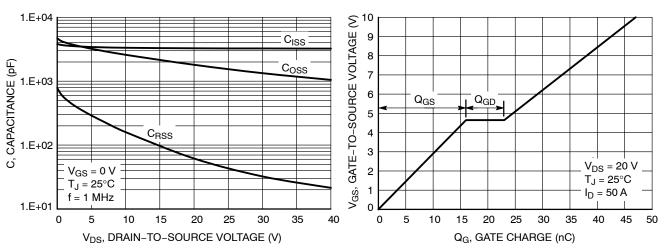


Figure 7. Capacitance Variation

Figure 8. Gate-to-Source Voltage vs. Charge




Figure 9. Resistive Switching Time Variation vs. Gate Resistance




Figure 10. Diode Forward Voltage vs. Current




Figure 11. Safe Operating Area




Figure 12. I_{PEAK} vs. Time in Avalanche

TYPICAL CHARACTERISTICS

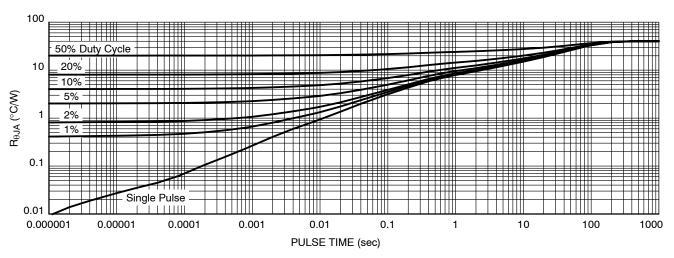


Figure 13. Thermal Characteristics

ORDERING INFORMATION

Device	Marking	Package	Shipping [†]			
NTMFS5C430NT1G	5C430N	DFN5 (Pb-Free)	1500 / Tape & Reel			
DISCONTINUED (Note 6)						
NTMFS5C430NT3G	5C430N	DFN5 (Pb-Free)	5000 / Tape & Reel			

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

6. **DISCONTINUED:** This device is not recommended for new design. Please contact your **onsemi** representative for information. The most

DISCONTINUED: This device is not recommended for new design. Please contact your onsemi representative for information. The most current information on this device may be available on www.onsemi.com.





DFN5 5x6, 1.27P (SO-8FL) CASE 488AA **ISSUE N**

DATE 25 JUN 2018

NOTES:

- DIMENSIONING AND TOLERANCING PER
- ASME Y14.5M, 1994.
 2. CONTROLLING DIMENSION: MILLIMETER.
 3. DIMENSION D1 AND E1 DO NOT INCLUDE
- MOLD FLASH PROTRUSIONS OR GATE BURRS

	MILLIMETERS				
DIM	MIN NOM MAX				
Α	0.90	1.00	1.10		
A1	0.00		0.05		
b	0.33	0.41	0.51		
С	0.23	0.28	0.33		
D	5.00	5.15	5.30		
D1	4.70	4.90	5.10		
D2	3.80	4.00	4.20		
E	6.00	6.15	6.30		
E1	5.70	5.90	6.10		
E2	3.45	3.65	3.85		
е	1.27 BSC				
G	0.51	0.575	0.71		
K	1.20	1.35	1.50		
L	0.51	0.575	0.71		
L1	0.125 REF				
М	3.00	3.40	3.80		
θ	0 °		12 °		

GENERIC MARKING DIAGRAM*



XXXXXX = Specific Device Code

= Assembly Location Α

Υ = Year W = Work Week ZZ = Lot Traceability

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present. Some products may not follow the Generic Marking.





DETAIL A

SIDE VIEW

*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

	DOCUMENT NUMBER:	98AON14036D	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
ſ	DESCRIPTION:	DFN5 5x6, 1.27P (SO-8FL)		PAGE 1 OF 1	

onsemi and ONSEMI. are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales