Silicon Carbide (SiC) Module – 8 mohm SiC M3S MOSFET, 1200 V, 2-PACK Half Bridge Topology, F1 Package

NXH008P120M3F1PTNG, NXH008P120M3F1PNG

The NXH008P120M3F1 is a power module containing 8 mΩ / 1200 V SiC MOSFET half-bridge and a thermistor in an F1 package.

Features

- 8 mΩ / 1200 V M3S SiC MOSFET Half-Bridge
- Thermistor
- Options with Pre-Applied Thermal Interface Material (TIM) and without Pre-Applied TIM
- Press-Fit Pins
- These Devices are Pb-Free, Halide Free and are RoHS Compliant

Typical Applications

- Solar Inverter
- Uninterruptible Power Supplies
- Electric Vehicle Charging Stations
- Industrial Power


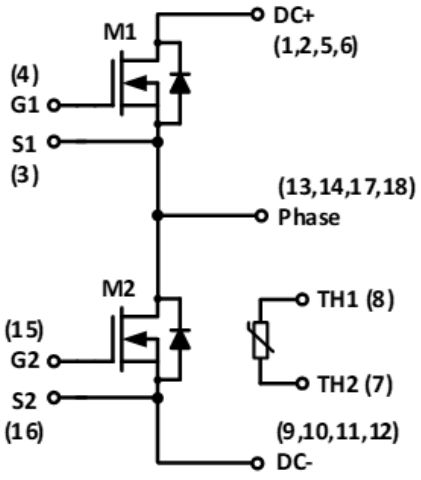



Figure 1. NXH008P120M3F1 Schematic Diagram

PACKAGE PICTURE




PIM18 33.8x42.5 (PRESS FIT)
CASE 180BW

MARKING DIAGRAM

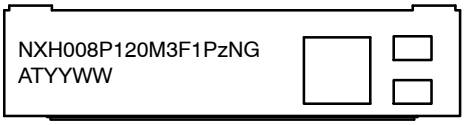

NXH008P120M3F1PzNG	= Specific Device Code
z	= T (with TIM), blank (without TIM)
AT	= Assembly & Test Site Code
YYWW	= Year and Work Week Code

PIN CONNECTIONS

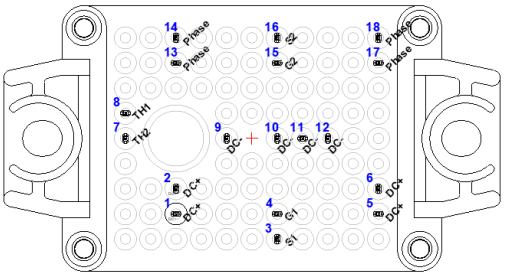

See Pin Function Description for pin names

ORDERING INFORMATION

See detailed ordering and shipping information on page 4 of this data sheet.

© Semiconductor Components Industries, LLC, 2026

PIN FUNCTION DESCRIPTION

Pin	Name	Description
1	DC+	DC Positive Bus connection
2	DC+	DC Positive Bus connection
3	S1	M1 Kelvin Emitter (High side switch)
4	G1	M1 Gate (High side switch)
5	DC+	DC Positive Bus connection
6	DC+	DC Positive Bus connection
7	TH2	Thermistor Connection 2
8	TH1	Thermistor Connection 1
9	DC−	DC Negative Bus connection
10	DC−	DC Negative Bus connection
11	DC−	DC Negative Bus connection
12	DC−	DC Negative Bus connection
13	PHASE	Center point of half bridge
14	PHASE	Center point of half bridge
15	G2	M2 Gate (Low side switch)
16	S2	M2 Kelvin Emitter (Low side switch)
17	PHASE	Center point of half bridge
18	PHASE	Center point of half bridge

Share Feedback
Your Opinion Matters

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
SiC MOSFET			
Drain-Source Voltage	V_{DSS}	1200	V
Gate-Source Voltage	V_{GS}	+22/−10	V
Continuous Drain Current @ T_c = 80 °C (T_J = 175 °C) (Note 2)	I_D	200	A
Pulsed Drain Current (T_J = 150 °C)	I_{Dpulse}	400	A
Maximum Power Dissipation (T_J = 175 °C) (Note 2)	P_{tot}	790	W
Minimum Operating Junction Temperature	T_{JMIN}	−40	°C
Maximum Operating Junction Temperature	T_{JMAX}	175	°C
THERMAL PROPERTIES			
Storage Temperature Range	T_{stg}	−40 to 150	°C
TIM Layer Thickness for NXH008P120M3F1PTNG	T_{TIM}	80 ± 20	μm
INSULATION PROPERTIES			
Isolation Test Voltage, t = 1 s, 60 Hz	V_{is}	4800	V_{RMS}
Creepage Distance		12.7	mm
CTI		600	
Substrate Ceramic Material		Si_3N_4	
Substrate Ceramic Material Thickness		0.32	mm

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Refer to ELECTRICAL CHARACTERISTICS, RECOMMENDED OPERATING RANGES and/or APPLICATION INFORMATION for Safe Operating parameters.
2. Maximum continuous current and power, without switching losses, to reach T_J = 175 °C defined by design based on MOSFET $R_{DS(ON)}$ and R_{thJC} and not subject to production test.

RECOMMENDED OPERATING RANGES

Rating	Symbol	Min	Max	Unit
Module Operating Junction Temperature	T_J	−40	150	°C

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

ELECTRICAL CHARACTERISTICS (T_J = 25 °C unless otherwise noted)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
SiC MOSFET CHARACTERISTICS						
Zero Gate Voltage Drain Current	V_{GS} = 0 V, V_{DS} = 1200 V, T_J = 25 °C	I_{DSS}	–	–	400	μA
Drain-Source On Resistance	V_{GS} = 18 V, I_D = 120 A, T_J = 25 °C	$R_{DS(ON)}$	–	7.7	10.9	mΩ
	V_{GS} = 18 V, I_D = 120 A, T_J = 125 °C		–	12.6	–	
	V_{GS} = 18 V, I_D = 120 A, T_J = 150 °C		–	14.4	–	
	V_{GS} = 18 V, I_D = 120 A, T_J = 175 °C		–	18.1	–	
Gate-Source Threshold Voltage	V_{GS} = V_{DS}, I_D = 60 mA	$V_{GS(TH)}$	2.04	2.4	4.4	V
Internal Gate Resistance		R_{GINT}	–	0.8	–	Ω
Gate Leakage Current	V_{GS} = −10 V / 22 V, V_{DS} = 0 V	I_{GSS}	−4	–	4	μA
Input Capacitance	V_{DS} = 800 V, V_{GS} = 0 V, f = 1 MHz	C_{ISS}	–	8334	–	pF
Reverse Transfer Capacitance		C_{RSS}	–	37	–	
Output Capacitance		C_{OSS}	–	472	–	

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS (T_J = 25 °C unless otherwise noted) (continued)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
SiC MOSFET CHARACTERISTICS						
Total Gate Charge	V_{DS} = 800 V, V_{GS} = −3/18 V, I_D = 120 A	$Q_{G(TOTAL)}$	–	419	–	nC
Gate-Source Charge		Q_{GS}	–	61	–	nC
Gate-Drain Charge		Q_{GD}	–	96	–	nC
Turn-on Delay Time	T_J = 25 °C V_{DS}= 800 V, I_D = 120 A V_{GS} = −3 V / 18 V, R_G = 2 Ω	$t_{d(on)}$	–	17	–	ns
Rise Time		t_r	–	17	–	
Turn-off Delay Time		$t_{d(off)}$	–	97	–	
Fall Time		t_f	–	12	–	
Turn-on Switching Loss per Pulse		E_{ON}	–	1760	–	μJ
Turn-off Switching Loss per Pulse		E_{OFF}	–	588	–	
Turn-on Delay Time	T_J = 150 °C V_{DS}= 800 V, I_D = 120 A V_{GS} = −3 V / 18 V, R_G = 2 Ω	$t_{d(on)}$	–	15	–	ns
Rise Time		t_r	–	15	–	
Turn-off Delay Time		$t_{d(off)}$	–	110	–	
Fall Time		t_f	–	13	–	
Turn-on Switching Loss per Pulse		E_{ON}	–	2155	–	μJ
Turn-off Switching Loss per Pulse		E_{OFF}	–	745	–	
Diode Forward Voltage	V_{GS} = −3 V, I_{SD} = 120 A, T_J = 25 °C	V_{SD}	–	4.67	6.2	V
	V_{GS} = −3 V, I_{SD} = 120 A, T_J = 125 °C		–	4.45	–	
	V_{GS} = −3 V, I_{SD} = 120 A, T_J = 150 °C		–	4.4	–	
Thermal Resistance – Chip-to-Case	M1, M2	R_{thJC}	–	0.120	–	°C/W
Thermal Resistance – Chip-to-Heatsink	Thermal grease, Thickness = 2 Mil +2%, A = 2.8 W/mK	R_{thJH}	–	0.356	–	°C/W
THERMISTOR CHARACTERISTICS						
Nominal Resistance	T = 25 °C	R_{25}	–	5	–	kΩ
	T = 100 °C	R_{100}	–	493	–	Ω
	T = 150 °C	R_{150}	–	159.5	–	Ω
Deviation of R_{100}	T = 100 °C	ΔR/R	−5	–	5	%
Power Dissipation – Recommended Limit	0.15 mA, Non-self-heating Effect	P_D	–	0.1	–	mW
Power Dissipation – Absolute Maxiumum	5 mA	P_D	–	34.2	–	mW
Power Dissipation Constant			–	1.4	–	mW/K
B-value	B (25/50), tolerance ±2%		–	3375	–	K
B-value	B (25/100), tolerance ±2%		–	3436	–	K

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

ORDERING INFORMATION

Orderable Part Number	Marking	Package	Shipping
NXH008P120M3F1PTNG	NXH008P120M3F1PTNG	F1-PIM18 33.8 x 42.5 (PRESS FIT) Case 180BW with pre-applied thermal interface material (TIM) (Pb-Free / Halide Free)	28 Units / Blister Tray
NXH008P120M3F1PNG	NXH008P120M3F1PNG	F1-PIM18 33.8 x 42.5 (PRESS FIT) Case 180BW (Pb-Free / Halide Free)	28 Units / Blister Tray

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTIC

M1/M2 SiC MOSFET CHARACTERISTIC

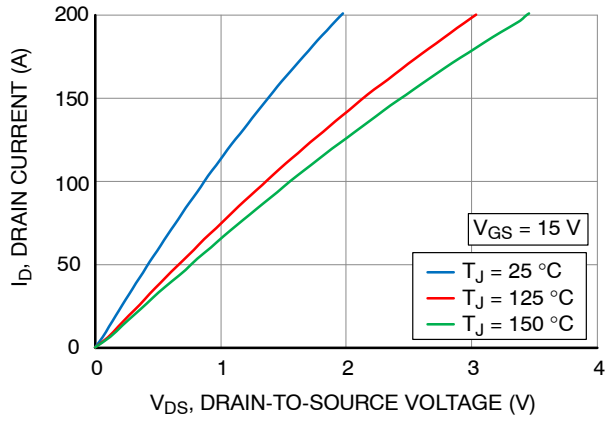


Figure 2. MOSFET Typical Output Characteristic V_{GS} = 15 V

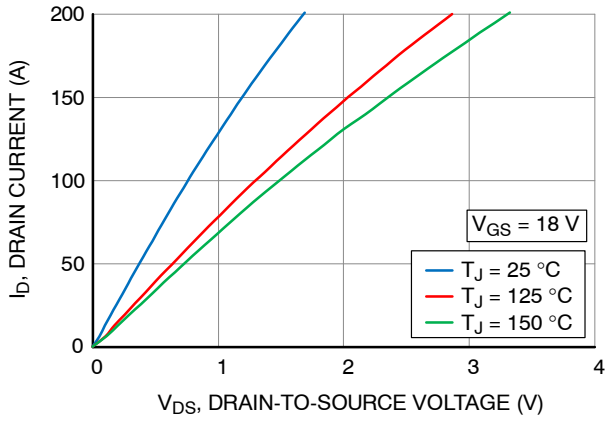


Figure 3. MOSFET Typical Output Characteristic V_{GS} = 18 V

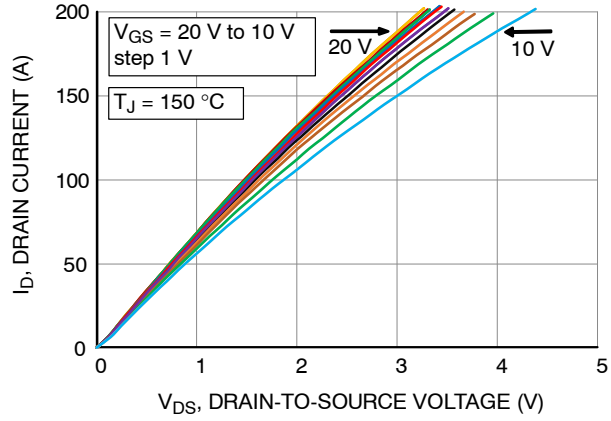


Figure 4. MOSFET Typical Output Characteristic V_{GS} = Var.

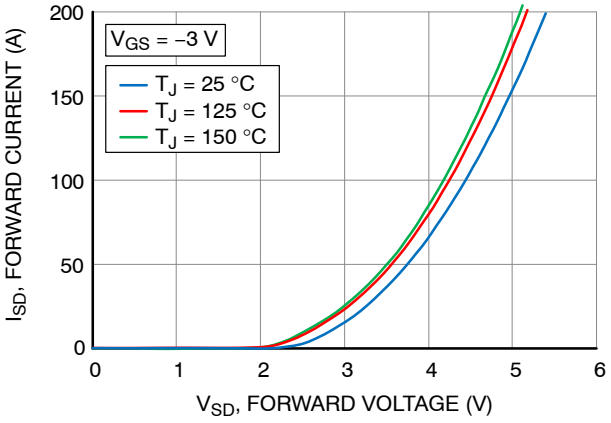


Figure 5. Body Diode Forward Characteristic

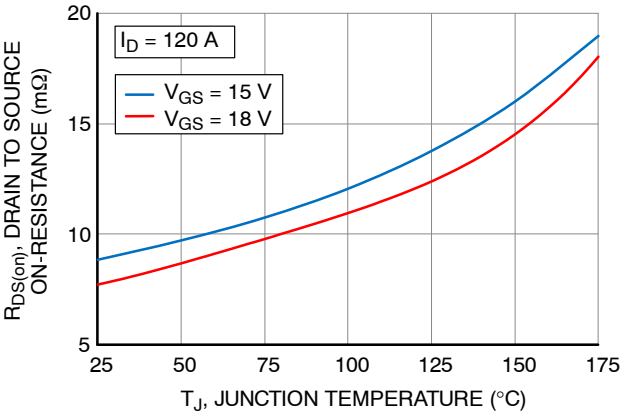


Figure 6. $R_{DS(on)}$ Drain-to-Source ON Resistance vs. Junction Temperature

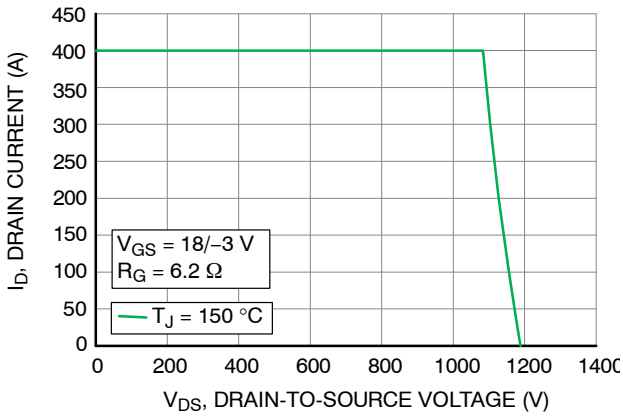


Figure 7. Reverse Bias Safe Operating Area (RBSOA)

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS (continued)

M1/M2 SIC MOSFET CHARACTERISTIC

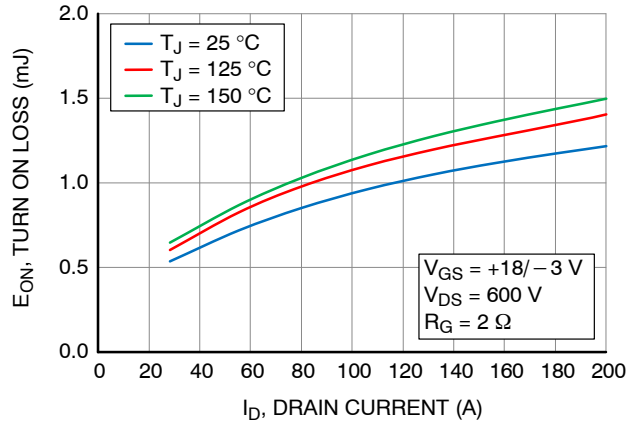


Figure 8. Switching on Loss vs. Drain Current V_{DS} = 600 V

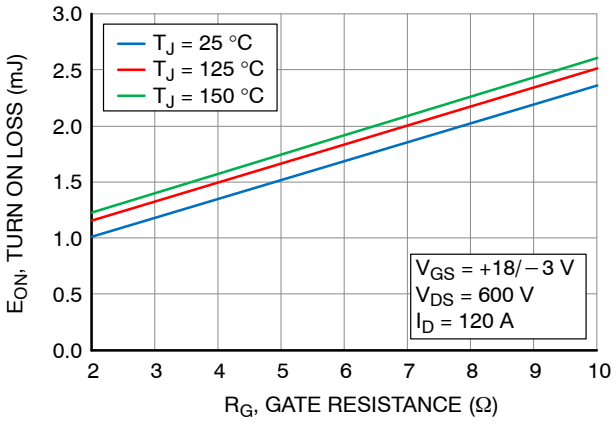


Figure 9. Switching on Loss vs. Gate Resistance V_{DS} = 600 V

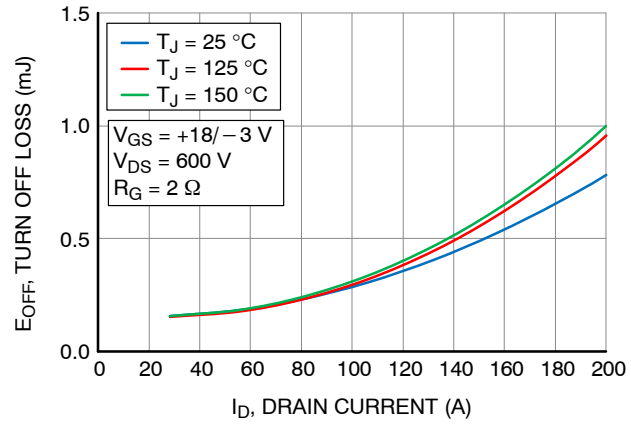


Figure 10. Switching off Loss vs. Drain Current V_{DS} = 600 V

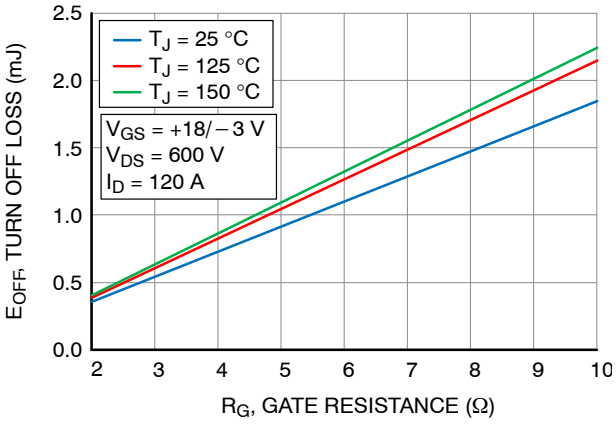


Figure 11. Switching off Loss vs. Gate Resistance V_{DS} = 600 V

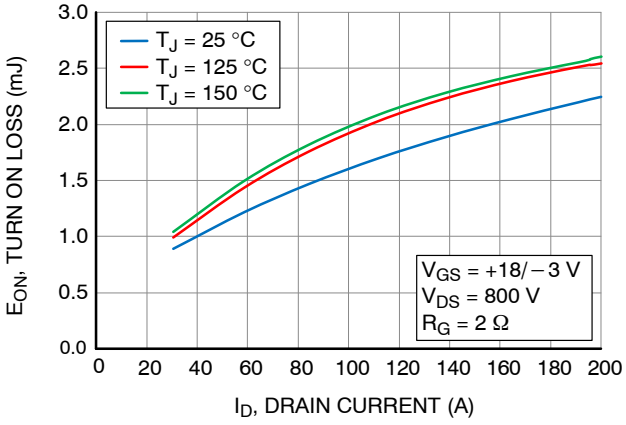


Figure 12. Switching on Loss vs. Drain Current V_{DS} = 800 V

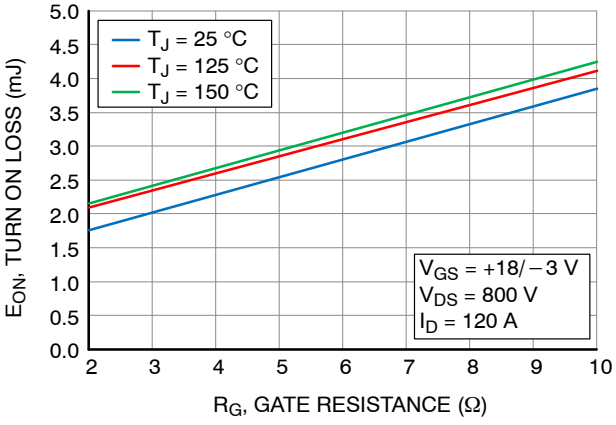


Figure 13. Switching on Loss vs. Gate Resistance V_{DS} = 800 V

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS (continued)

M1/M2 SIC MOSFET CHARACTERISTIC

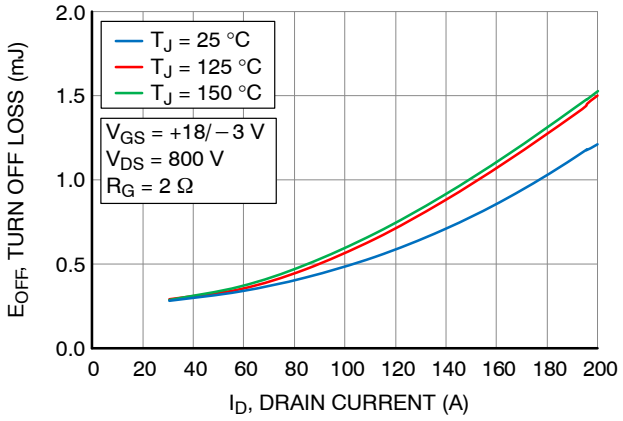


Figure 14. Switching off Loss vs. Drain Current V_{DS} = 800 V

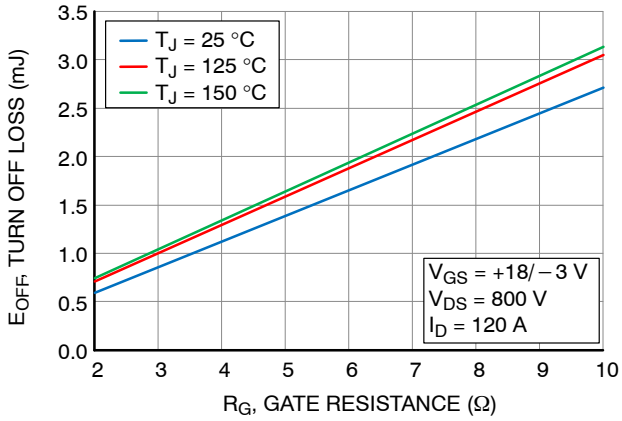


Figure 15. Switching off Loss vs. Gate Resistance V_{DS} = 800 V

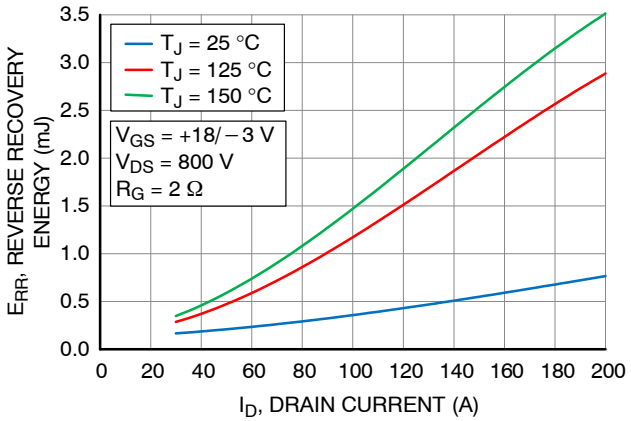


Figure 16. Reverse Recovery Energy vs. Drain Current V_{DS} = 800 V

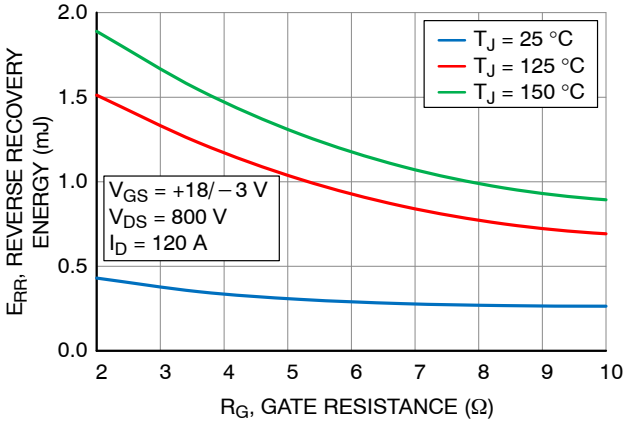


Figure 17. Reverse Recovery Energy vs. Gate Resistance V_{DS} = 800 V

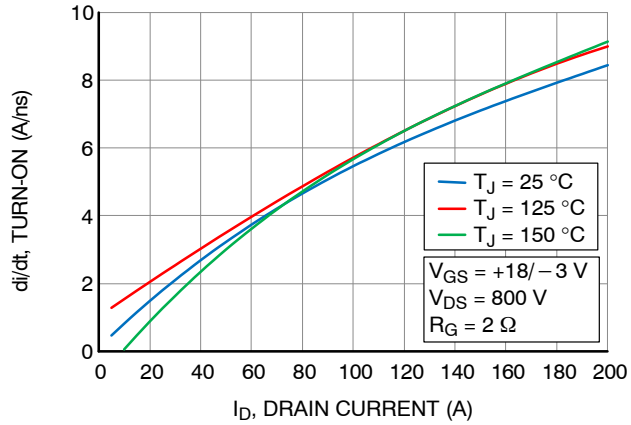


Figure 18. di/dt Turn ON vs. Drain Current V_{DS} = 800 V

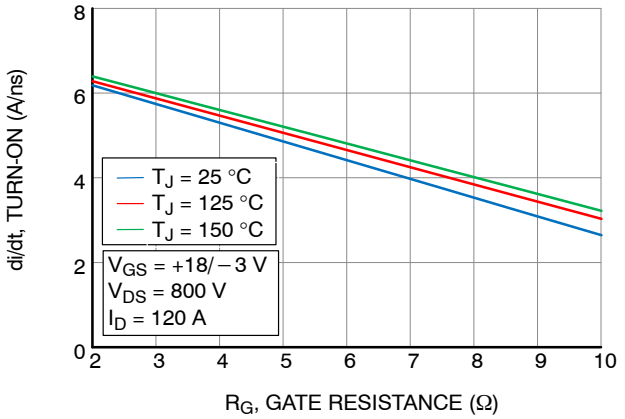


Figure 19. di/dt Turn ON vs. Gate Resistance V_{DS} = 800 V

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS (continued)

M1/M2 SIC MOSFET CHARACTERISTIC

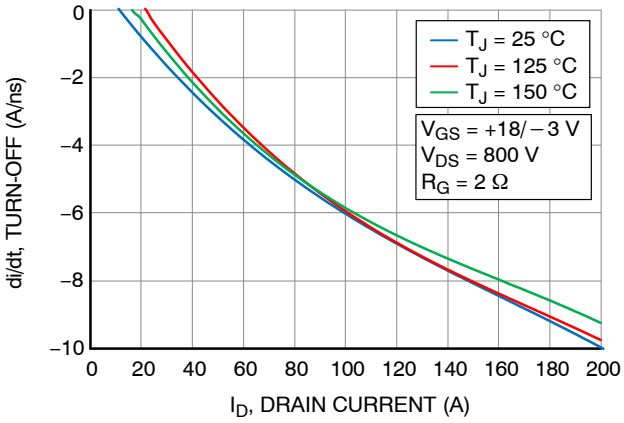


Figure 20. di/dt Turn OFF vs. Drain Current V_{DS} = 800 V

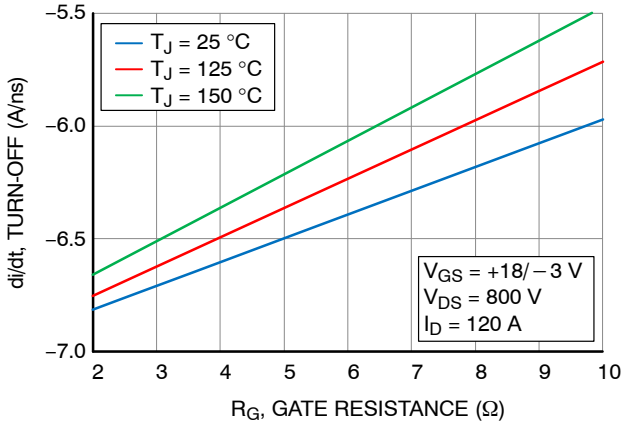


Figure 21. di/dt Turn OFF vs. Gate Resistance V_{DS} = 800 V

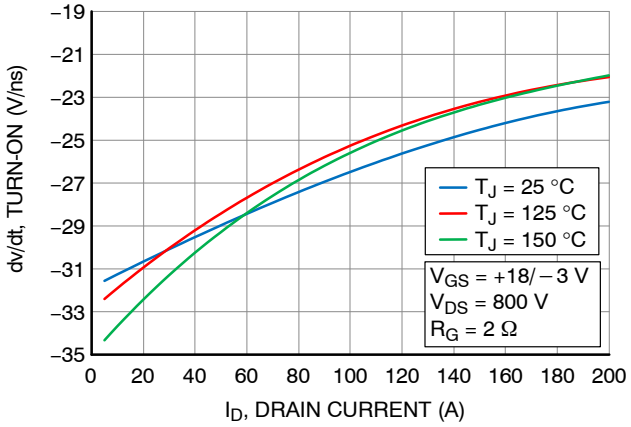


Figure 22. dv/dt Turn ON vs. Drain Current V_{DS} = 800 V

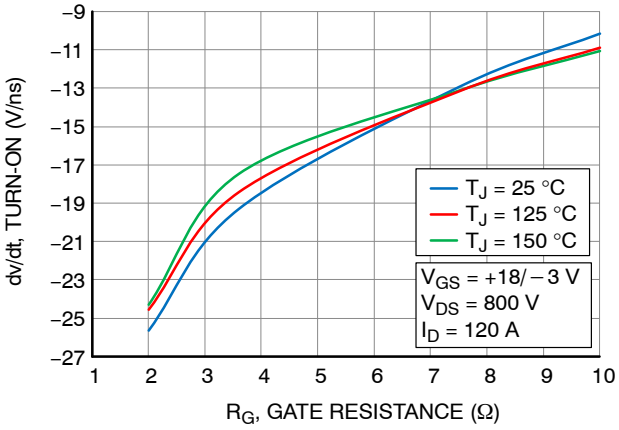


Figure 23. dv/dt Turn ON vs. Gate Resistance V_{DS} = 800 V

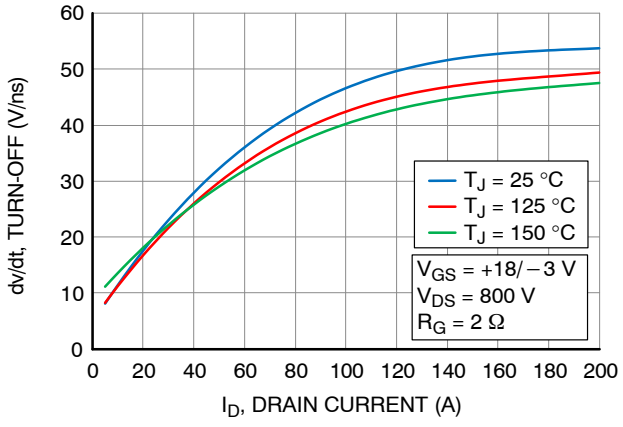


Figure 24. dv/dt Turn OFF vs. Drain Current V_{DS} = 800 V

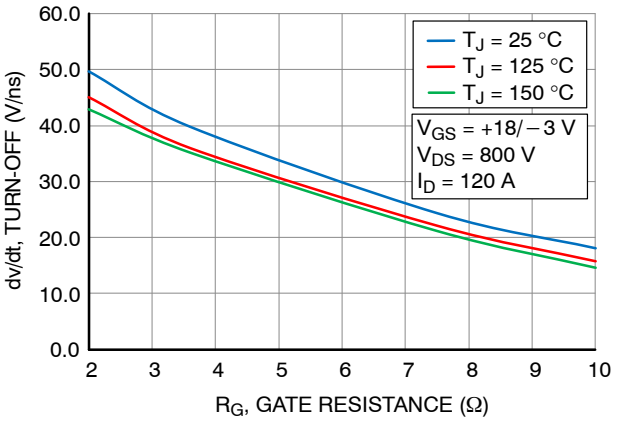


Figure 25. dv/dt Turn OFF vs. Gate Resistance V_{DS} = 800 V

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS (continued)

M1/M2 SIC MOSFET CHARACTERISTIC

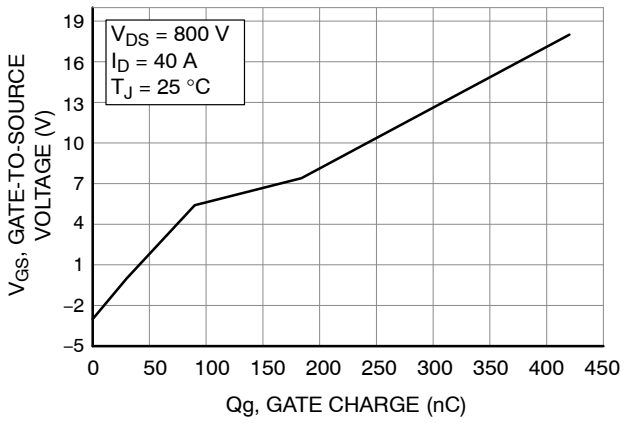


Figure 26. Gate-to-Source Voltage vs. Total Charge

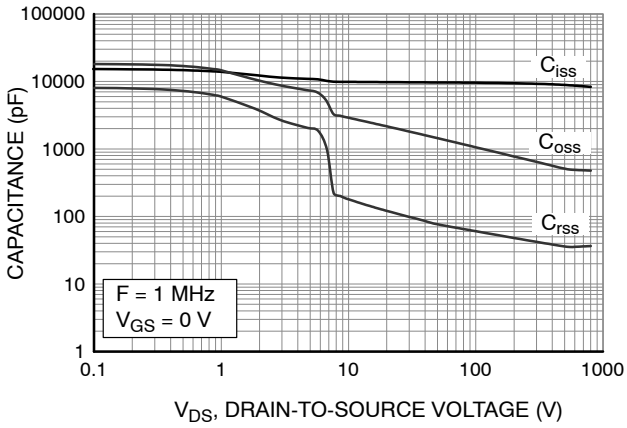


Figure 27. Capacitance vs. Drain-to-Source Voltage

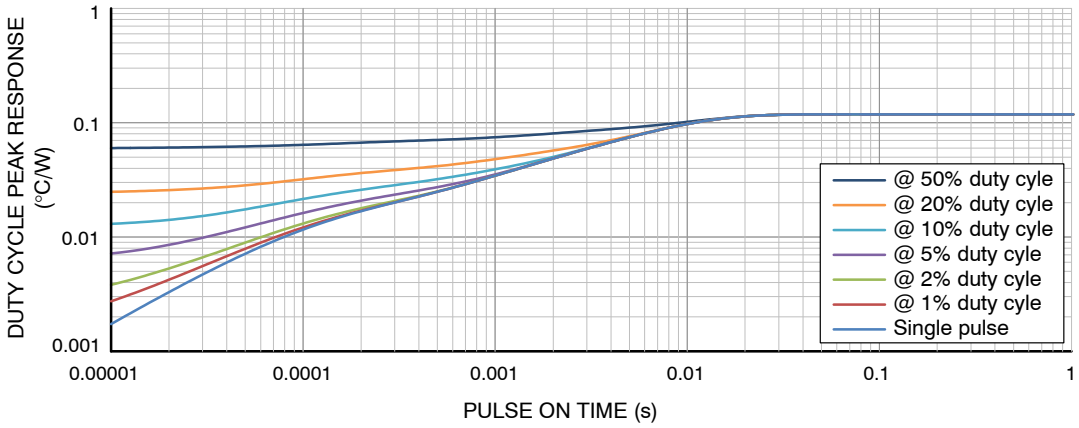



Figure 28. Duty Cycle Response vs. Pulse On Time

Table 1. THERMAL FOSTER NETWORKS

Foster Element #	Rth	Cth
1	0.012479	0.0065269
2	0.0007504	0.6245657
3	0.0143624	0.0719335
4	0.0908818	0.0750868

Share Feedback
Your Opinion Matters

PIN POSITION INFORMATION

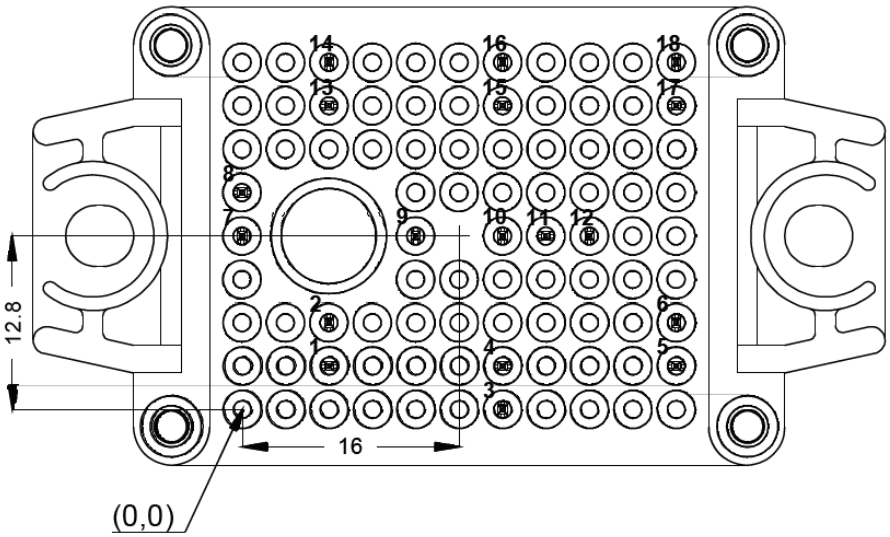

Pin position


Pin #	X	Y	Function	Pin #	X	Y	Function
1	6.4	3.2	DC+	10	19.2	12.8	DC-
2	6.4	6.4	DC+	11	22.4	12.8	DC-
3	19.2	0.0	S1	12	25.6	12.8	DC-
4	19.2	3.2	G1	13	6.4	22.4	Phase
5	32.0	3.2	DC+	14	6.4	25.6	Phase
6	32.0	6.4	DC+	15	19.2	22.4	G2
7	0.0	12.8	TH2	16	19.2	25.6	S2
8	0.0	16.0	TH1	17	32.0	22.4	Phase
9	12.8	12.8	DC-	18	32.0	25.6	Phase

Share Feedback
Your Opinion Matters

REVISION HISTORY


Revision	Description of Changes	Date
0	Initial document release.	9/18/2026

Share Feedback
Your Opinion Matters




PIM18 33.8x42.5 (PRESS FIT)
CASE 180BW
ISSUE B


DATE 30 APR 2021

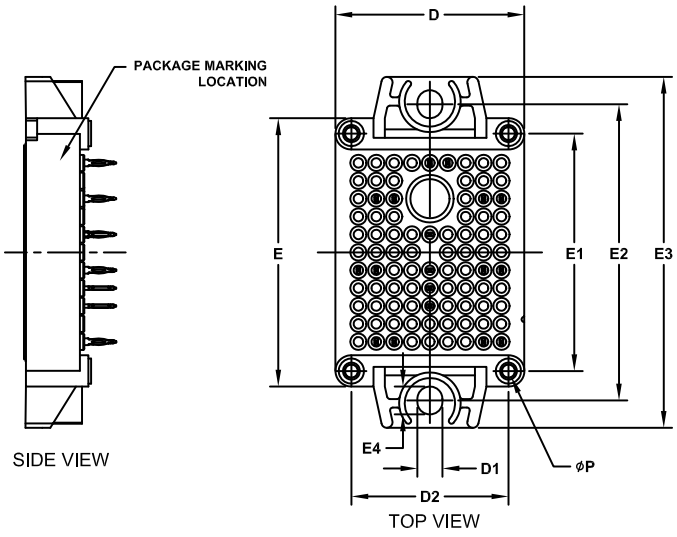

NOTES:
1. CONTROLLING DIMENSION: MILLIMETERS
2. PIN POSITION TOLERANCE IS ± 0.4mm


DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	11.65	12.00	12.35
A1	16.00	16.50	17.00
A2	0.00	0.35	0.60
A3	12.85	13.35	13.85
b	1.15	1.20	1.25
b1	0.59	0.64	0.69
D	33.50	33.80	34.10
D1	4.40	4.50	4.60
D2	27.95	28.10	28.25
E	47.70	48.00	48.30
E1	42.35	42.50	42.65
E2	52.90	53.00	53.10
E3	62.30	62.80	63.30
E4	4.90	5.00	5.10
P	2.20	2.30	2.40

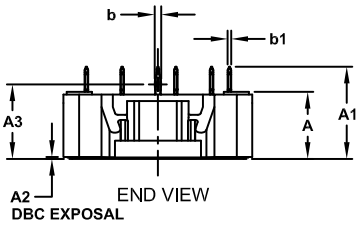

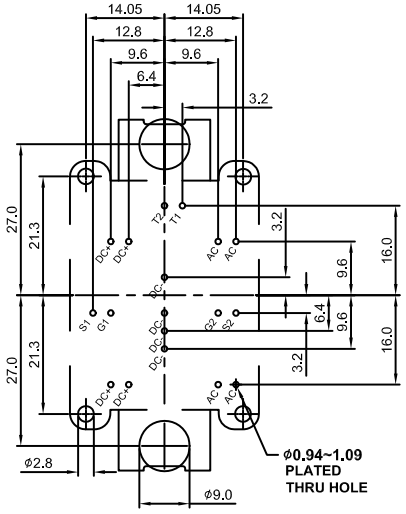

RECOMMENDED MOUNTING PATTERN

GENERIC MARKING DIAGRAM*

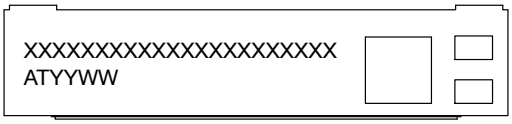

XXXXX = Specific Device Code
AT = Assembly & Test Site Code
YYWW = Year and Work Week Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “ ▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98AON19723H**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.	
DESCRIPTION:	**PIM18 33.8x42.5 (PRESS FIT)**		**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales