Complementary Silicon Plastic Power Transistors

TIP31G, TIP31AG, TIP31BG, TIP31CG (NPN), TIP32G, TIP32AG, TIP32BG, TIP32CG (PNP)

Designed for use in general purpose amplifier and switching applications.

Features

- High Current Gain Bandwidth Product
- Compact TO-220 Package
- These Devices are Pb-Free and are RoHS Compliant*

MAXIMUM RATINGS


| Symbol | Rating | Value | Unit |
|-----------------------------------|---|-----------------------|-----------|
| V _{CEO} | Collector – Emitter Voltage TIP31G, TIP32G TIP31AG, TIP32AG TIP31BG, TIP32BG TIP31CG, TIP32CG | 40 60 80 100 | Vdc |
| V _{CB} | Collector–Base Voltage TIP31G, TIP32G TIP31AG, TIP32AG TIP31BG, TIP32BG TIP31CG, TIP32CG | 40 60 80 100 | Vdc |
| V _{EB} | Emitter-Base Voltage | 5.0 | Vdc |
| Ι _C | Collector Current – Continuous | 3.0 | Adc |
| I _{CM} | Collector Current – Peak | 5.0 | Adc |
| Ι _Β | Base Current | 1.0 | Adc |
| PD | Total Power Dissipation @ T _C = 25°C Derate above 25°C | 40 0.32 | W W/°C |
| P _D | Total Power Dissipation @ T _A = 25°C Derate above 25°C | 2.0 0.016 | W W/°C |
| E | Unclamped Inductive Load Energy (Note 1) | 32 | mJ |
| T _J , T _{stg} | Operating and Storage Junction Temperature Range | -65 to +150 | °C |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected. 1. $I_C = 1.8 \text{ A}, L = 20 \text{ mH}, P.R.F. = 10 \text{ Hz}, V_{CC} = 10 \text{ V}, R_{BF} = 100 \Omega$


THERMAL CHARACTERISTICS

| Symbol | Characteristic | Max | Unit |
|-----------------|---|-------|------|
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient | 62.5 | °C/W |
| $R_{\theta JC}$ | Thermal Resistance, Junction-to-Case | 3.125 | °C/W |


*For additional information on our Pb–Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, <u>SOLDERRM/D</u>.



3 AMPERE POWER TRANSISTORS COMPLEMENTARY SILICON 40–60–80–100 VOLTS, 40 WATTS

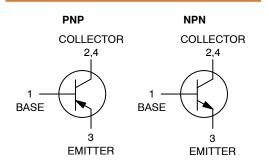

MARKING DIAGRAM

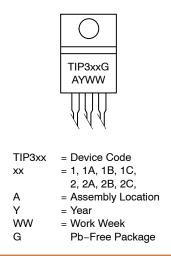

ORDERING INFORMATION

See detailed ordering and shipping information on page 6 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 6.

TIP31G, TIP31AG, TIP31BG, TIP31CG (NPN), TIP32G, TIP32AG, TIP32BG, TIP32CG (PNP)

| Symbol | Characteristic | Min | Max | Unit |
|-----------------------|---|-----------------------|--------------------------|------|
| FF CHARA | CTERISTICS | • | | |
| V _{CEO(sus)} | | 40 60 80 100 | | Vdc |
| I _{CEO} | Collector Cutoff Current ($V_{CE} = 30$ Vdc, $I_B = 0$) TIP31G, TIP32G, TIP31AG, TIP32AG ($V_{CE} = 60$ Vdc, $I_B = 0$) TIP31BG, TIP31CG, TIP32BG, TIP32CG | - | 0.3 0.3 | mAdc |
| I _{CES} | Collector Cutoff Current ($V_{CE} = 40 \text{ Vdc}, V_{EB} = 0$) TIP31G, TIP32G ($V_{CE} = 60 \text{ Vdc}, V_{EB} = 0$) TIP31AG, TIP32AG ($V_{CE} = 80 \text{ Vdc}, V_{EB} = 0$) TIP31BG, TIP32BG ($V_{CE} = 100 \text{ Vdc}, V_{EB} = 0$) TIP31CG, TIP32CG | | 200 200 200 200 | μAdc |
| I _{EBO} | Emitter Cutoff Current ($V_{BE} = 5.0 \text{ Vdc}, I_C = 0$) | _ | 1.0 | mAdc |
| N CHARAC | TERISTICS (Note 2) | - | | |
| h _{FE} | DC Current Gain ($I_C = 1.0 \text{ Adc}, V_{CE} = 4.0 \text{ Vdc}$) ($I_C = 3.0 \text{ Adc}, V_{CE} = 4.0 \text{ Vdc}$) | 25 10 | - 50 | - |
| V _{CE(sat)} | Collector–Emitter Saturation Voltage $(I_C = 3.0 \text{ Adc}, I_B = 375 \text{ mAdc})$ | _ | 1.2 | Vdc |
| V _{BE(on)} | Base-Emitter On Voltage (I _C = 3.0 Adc, V _{CE} = 4.0 Vdc) | - | 1.8 | Vdc |
| YNAMIC CH | IARACTERISTICS | | | |
| f _T | Current–Gain – Bandwidth Product (I _C = 500 mAdc, V _{CE} = 10 Vdc, f _{test} = 1.0 MHz) | 3.0 | _ | MHz |
| h _{fe} | Small–Signal Current Gain (I _C = 0.5 Adc, V _{CE} = 10 Vdc, f = 1.0 kHz) | 20 | - | - |

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 2. Pulse Test: Pulse Width \leq 300 µs, Duty Cycle \leq 2.0%.

TIP31G, TIP31AG, TIP31BG, TIP31CG (NPN), TIP32G, TIP32AG, TIP32BG, TIP32CG (PNP)



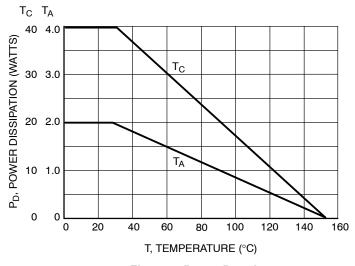


Figure 1. Power Derating



 $\rm R_B$ and $\rm R_C$ VARIED TO OBTAIN DESIRED CURRENT LEVELS.

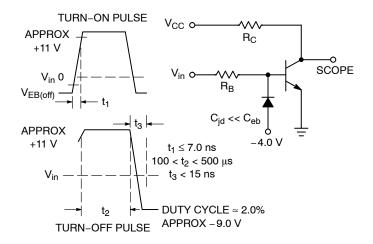

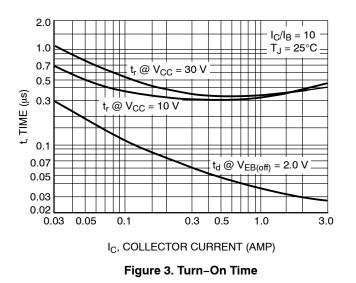

TIP31G, TIP31AG, TIP31BG, TIP31CG (NPN), TIP32G, TIP32AG, TIP32BG, TIP32CG (PNP)

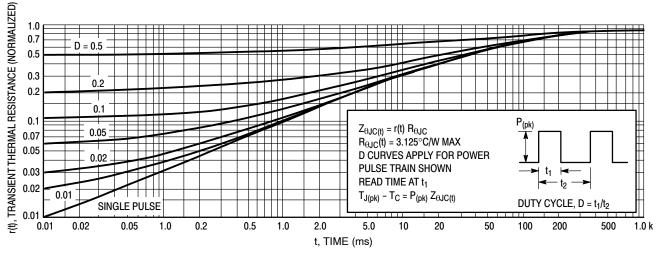


Figure 4. Thermal Response


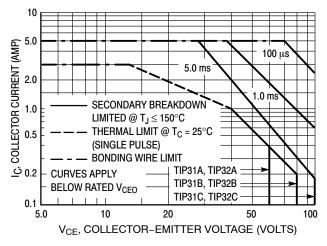



Figure 5. Active Region Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^{\circ}$ C; T_{C} is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \le 150^{\circ}$ C. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

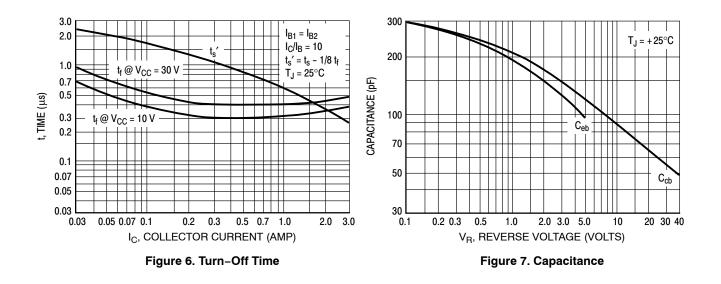

TIP31G, TIP31AG, TIP31BG, TIP31CG (NPN), TIP32G, TIP32AG, TIP32BG, TIP32CG (PNP)

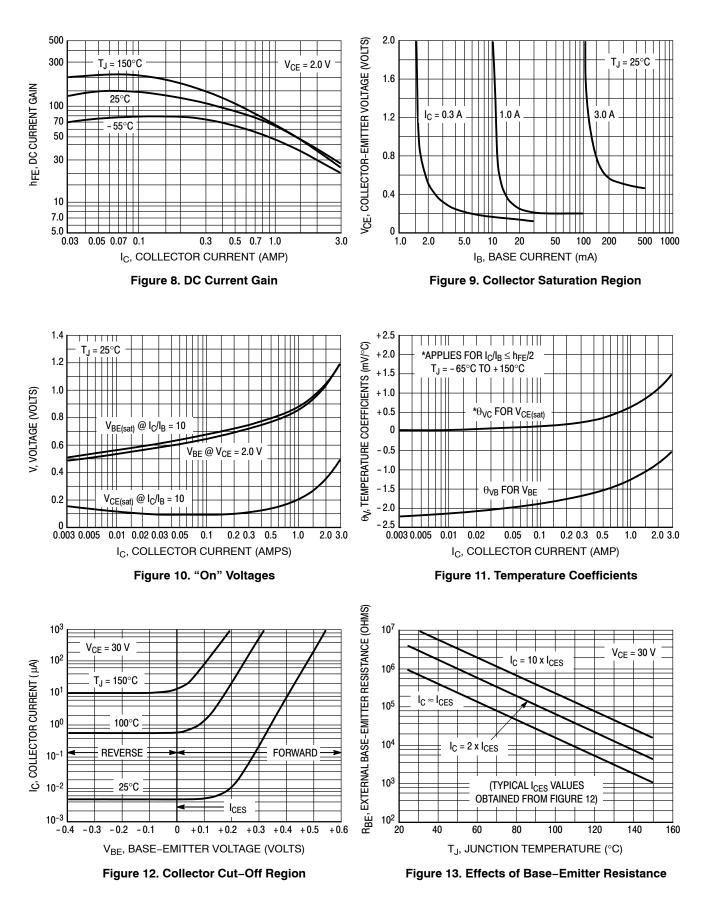

TIP31G, TIP31AG, TIP31BG, TIP31CG (NPN), TIP32G, TIP32AG, TIP32BG, TIP32CG (PNP)

ORDERING INFORMATION


| Device | Package | Shipping |
|---------|---------------------|-----------------|
| TIP31AG | TO-220 (Pb-Free) | 50 Units / Rail |
| TIP31BG | TO-220 (Pb-Free) | 50 Units / Rail |
| TIP31CG | TO-220 (Pb-Free) | 50 Units / Rail |
| TIP32G | TO-220 (Pb-Free) | 50 Units / Rail |
| TIP32AG | TO-220 (Pb-Free) | 50 Units / Rail |
| TIP32BG | TO-220 (Pb-Free) | 50 Units / Rail |
| TIP32CG | TO-220 (Pb-Free) | 50 Units / Rail |

DISCONTINUED (Note 3)

| TIP31G | TO-220 | 50 Units / Rail |
|--------|-----------|-----------------|
| | (Pb-Free) | |

3. DISCONTINUED: This device is not recommended for new design. Please contact your **onsemi** representative for information. The most current information on this device may be available on <u>www.onsemi.com</u>.



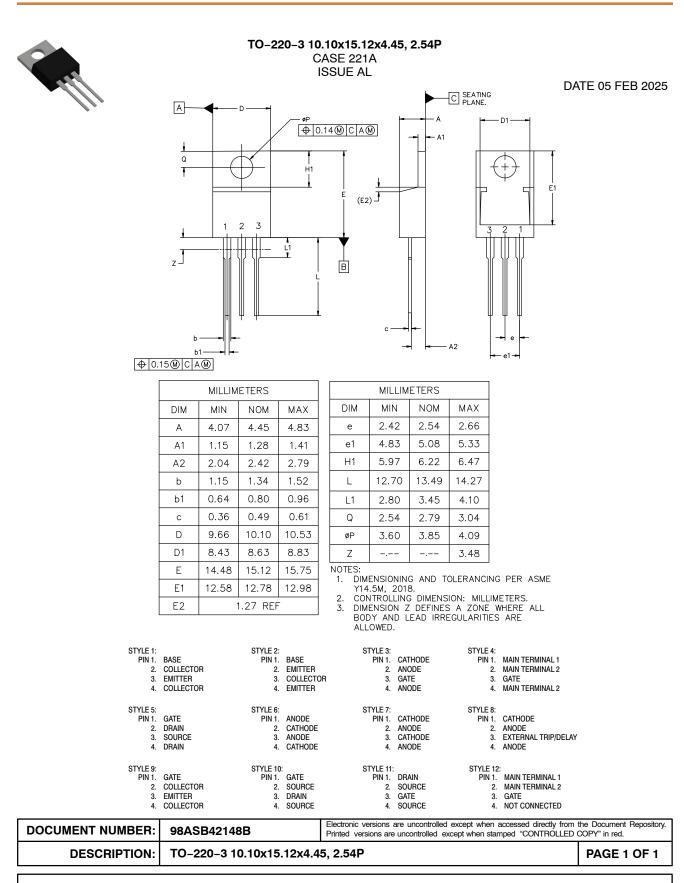

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>