

## 3 Watt Plastic Surface Mount Zener Voltage Regulators

# 1SMB59xxBT3G Series, SZ1SMB59xxT3G Series

This complete new line of 3 W Zener diodes offers the following advantages.

### **Features**

- Zener Voltage Range 3.3 V to 200 V
- ESD Rating of Class 3 (> 16 kV) per Human Body Model
- Flat Handling Surface for Accurate Placement
- Package Design for Top Side or Bottom Circuit Board Mounting
- AEC-Q101 Qualified and PPAP Capable SZ1SMB59xxT3G
- SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements
- These are Pb-Free Devices\*

## **Mechanical Characteristics:**

CASE: Void-free, transfer-molded plastic

**FINISH:** All external surfaces are corrosion resistant and leads are readily solderable

## MAXIMUM LEAD TEMPERATURE FOR SOLDERING PURPOSES:

260°C for 10 Seconds

**LEADS:** Modified L-Bend providing more contact area to bond pads

**POLARITY:** Cathode indicated by polarity band

FLAMMABILITY RATING: UL 94 V-0

#### **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Maximum Steady State Power Dissipation @ T <sub>L</sub> = 75°C Measured at Zero Lead Length Derate Above 75°C	P <sub>D</sub>	3.0	W mW/°C
Thermal Resistance from Junction-to-Lead	$R_{ heta JL}$	25	°C/W
Maximum Steady State Power Dissipation @ T <sub>A</sub> = 25°C (Note ) Derate Above 25°C Thermal Resistance from Junction-to-Ambient	P <sub>D</sub> R <sub>θJA</sub>	550 4.4 226	mW mW/°C °C/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-65 to +150	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. FR-4 board, using recommended footprint.

## \*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

1

## PLASTIC SURFACE MOUNT ZENER VOLTAGE REGULATOR DIODES 3.3-200 V, 3 W DC POWER



### **MARKING DIAGRAM**



A = Assembly Location

Y = Year WW = Work Week

9xxB = Device Code (Refer to page 3)

= Pb-Free Package

(Note: Microdot may be in either location)

## **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
1SMB59xxBT3G	SMB (Pb-Free)	2,500 / Tape & Reel
SZ1SMB59xxBT3G	SMB (Pb-Free)	2,500 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

### **DEVICE MARKING INFORMATION**


See specific marking information in the device marking column of the Electrical Characteristics table on page 3 of this data sheet.

## **ELECTRICAL CHARACTERISTICS**

 $(T_L = 30^{\circ}C \text{ unless otherwise noted,}$ 

 $V_F = 1.5 \text{ V Max.}$  @  $I_F = 200 \text{ mA(dc)}$  for all types)

Symbol	Parameter				
Vz	Reverse Zener Voltage @ I <sub>ZT</sub>				
I <sub>ZT</sub>	Reverse Current				
Z <sub>ZT</sub>	Maximum Zener Impedance @ I <sub>ZT</sub>				
I <sub>ZK</sub>	Reverse Current				
Z <sub>ZK</sub>	Maximum Zener Impedance @ I <sub>ZK</sub>				
I <sub>R</sub>	Reverse Leakage Current @ V <sub>R</sub>				
V <sub>R</sub>	Reverse Voltage				
I <sub>F</sub>	Forward Current				
V <sub>F</sub>	Forward Voltage @ I <sub>F</sub>				
I <sub>ZM</sub>	Maximum DC Zener Current				



**ELECTRICAL CHARACTERISTICS** ( $T_L = 30^{\circ}C$  unless otherwise noted,  $V_F = 1.5 \text{ V}$  Max. @  $I_F = 200 \text{ mA}(dc)$  for all types) (Devices listed in **bold, italic** are **onsemi** Preferred devices.)

		Ze	ener Voltage (Note 3) Zener Impedance (Note		Note 4)	Leakage Current					
Device*	Device	,	V <sub>Z</sub> (Volts)		@ I <sub>ZT</sub>	Z <sub>ZT</sub> @ I <sub>ZT</sub>	Z <sub>ZK</sub> @ I <sub>ZK</sub>		I <sub>R</sub> @ V <sub>R</sub>		I <sub>ZM</sub>
(Note 2)	Marking	Min	Nom	Max	mA	Ω	Ω	mA	μΑ	Volts	mA(dc)
1SMB5913BT3G	913B	3.13	3.3	3.47	113.6	10	500	1	100	1	454
1SMB5914BT3G	914B	3.42	3.6	3.78	104.2	9	500	1	75	1	416
1SMB5915BT3G	915B	3.70	3.9	4.10	96.1	7.5	500	1	25	1	384
1SMB5916BT3G	916B	4.08	4.3	4.52	87.2	6	500	1	5	1	348
1SMB5917BT3G	917B	4.46	4.7	4.94	79.8	5	500	1	5	1.5	319
1SMB5918BT3G	918B	4.84	5.1	5.36	73.5	4	350	1	5	2	294
1SMB5919BT3G 1SMB5920BT3G	919B 920B	5.32 5.89	5.6 6.2	5.88 6.51	66.9 60.5	2 2	250 200	1 1	5 5	3 4	267 241
1SMB5921BT3G	921B 922B	6.46	6.8 7.5	7.14 7.88	55.1 50	2.5	200 400	1 0.5	5 5	5.2	220
1SMB5922BT3G <b>1SMB5923BT3G</b>	922B <b>923B</b>	7.12 <b>7.79</b>	7.5 <b>8.2</b>	7.88 <b>8.61</b>	45.7	3 <b>3.5</b>	400 400	0.5 <b>0.5</b>	5 <b>5</b>	6 <b>6.5</b>	200 <b>182</b>
1SMB5924BT3G	923B 924B	8.64	9.1	9.56	41.2	3.5 4	500	0.5 0.5	5	7	164
1SMB5925BT3G	925B	9.5	10	10.5	37.5	4.5	500	0.25	5	8	150
1SMB5925BT3G 1SMB5926BT3G	925B 926B	9.5 10.45	11	10.5 11.55	37.5 34.1	5.5	550 550	0.25 0.25	1	8.4	136
1SMB5927BT3G	927B	11.4	12	12.6	31.2	6.5	<i>550</i>	0.25	1	9.1	125
1SMB5928BT3G	928B	12.35	13	13.65	28.8	7	550	0.25	1	9.9	115
1SMB5929BT3G	929B	14.25	15	15.75	25	9	600	0.25	1	11.4	100
1SMB5930BT3G	930B	15.2	16	16.8	23.4	10	600	0.25	1	12.2	93
1SMB5931BT3G	931B	17.1	18	18.9	20.8	12	650	0.25	1	13.7	83
1SMB5932BT3G	932B	19	20	21	18.7	14	650	0.25	1	15.2	75
1SMB5933BT3G	933B	20.9	22	23.1	17	17.5	650	0.25	1	16.7	68
1SMB5934BT3G	934B	22.8	24	25.2	15.6	19	700	0.25	1	18.2	62
1SMB5935BT3G	935B	25.65	27	28.35	13.9	23	700	0.25	1	20.6	55
1SMB5936BT3G	936B	28.5	30	31.5	12.5	28	750	0.25	1	22.8	50
1SMB5937BT3G	937B	31.35	33	34.65	11.4	33	800	0.25	1	25.1	45
1SMB5938BT3G	938B	34.2	36	37.8	10.4	38	850	0.25	1	27.4	41
1SMB5939BT3G	939B	37.05	39	40.95	9.6	45 50	900	0.25	1	29.7	38
1SMB5940BT3G	940B	40.85	43	45.15	8.7	53	950	0.25	1	32.7	34
1SMB5941BT3G	941B	44.65	47	49.35	8	67	1000	0.25	1	35.8	31
1SMB5942BT3G	942B 943B	48.45	51	53.55 58.8	7.3	70	1100	0.25	1	38.8	29
1SMB5943BT3G 1SMB5944BT3G	943B 944B	53.2 58.9	56 62	65.1	6.7 6	86 100	1300 1500	0.25 0.25	1 1	42.6 47.1	26 24
1SMB5945BT3G	945B	64.6	68	71.4	5.5	120	1700	0.25	1	51.7	22
1SMB5946BT3G	945B 946B	71.25	75	71.4 78.75	5.5 5	140	2000	0.25	1	56	20
1SMB5940B13G	947B	77.9	82	86.1	4.6	160	2500	0.25	1	62.2	18
1SMB5948BT3G	948B	86.45	91	95.55	4.1	200	3000	0.25	1	69.2	16
1SMB5949BT3G	949B	95	100	105	3.7	250	3100	0.25	1	76	15
1SMB5951BT3G	951B	114	120	126	3.1	380	4500	0.25	1	91.2	12
1SMB5952BT3G	952B	123.5	130	136.5	2.9	450	5000	0.25	1	98.8	11
1SMB5953BT3G	953B	142.5	150	157.5	2.5	600	6000	0.25	1	114	10
1SMB5954BT3G	954B	152	160	168	2.3	700	6500	0.25	1	121.6	9
1SMB5955BT3G	955B	171	180	189	2.1	900	7000	0.25	1	136.8	8
1SMB5956BT3G	956B	190	200	210	1.9	1200	8000	0.25	1	152	7


<sup>2.</sup> TOLERANCE AND TYPE NUMBER DESIGNATION The type numbers listed indicate a tolerance of  $\pm 5\%$ .

<sup>3.</sup> ZENER VOLTAGE (Vz) MEASUREMENT

Nominal Zener voltage is measured with the device junction in thermal equilibrium with ambient temperature at 25°C.

ZENER IMPEDANCE (Z<sub>Z</sub>) DERIVATION Z<sub>ZT</sub> and Z<sub>ZK</sub> are measured by dividing the ac voltage drop across the device by the ac current applied. The specified limits are for I<sub>Z(ac)</sub> = 0.1 I<sub>Z(dc)</sub> with the ac frequency = 60 Hz.


<sup>\*</sup>Include SZ-prefix devices where applicable.



RECTANGULAR P<sub>PK</sub>, PEAK SURGE POWER (WATTS) NONREPETITIVE 500 WAVEFORM T<sub>J</sub> = 25°C PRIOR 300 **TO INITIAL PULSE** 200 100 50 30 20 10 L 0.1 0.2 0.3 0.5 3 5 30 50 10 PW, PULSE WIDTH (ms)

Figure 1. Steady State Power Derating

Figure 2. Maximum Surge Power







Figure 3. Zener Voltage - To 12 Volts

Figure 4. Zener Voltage – 14 To 200 Volts






Figure 5. V<sub>Z</sub> = 3.3 thru 10 Volts

Figure 6. V<sub>Z</sub> = 12 thru 82 Volts

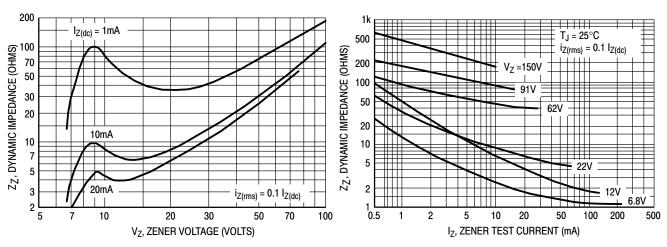


Figure 7. Effect of Zener Voltage

Figure 8. Effect of Zener Current

## Rating and Typical Characteristic Curves (T<sub>A</sub> = 25°C)


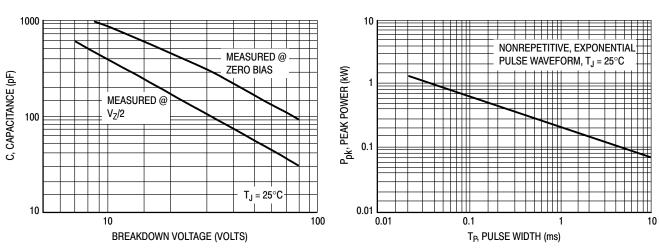


Figure 9. Capacitance Curve

Figure 10. Typical Pulse Rating Curve





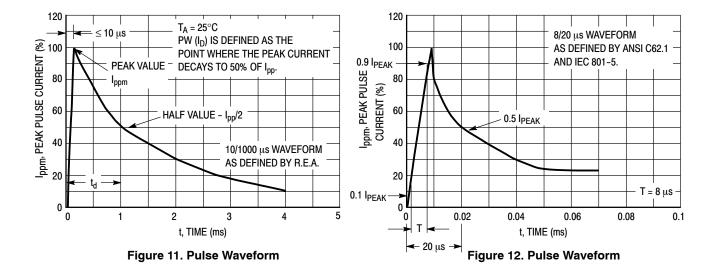





**SMB** CASE 403A-03 **ISSUE J** 


**DATE 19 JUL 2012** 

**Polarity Band** 


SCALE 1:1 Non-Polarity Band







#### **SOLDERING FOOTPRINT\***




\*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: INCL.
- CONTROLLING DIMENSION: INCH.
  DIMENSION b SHALL BE MEASURED WITHIN DIMENSION L1.

	М	ILLIMETE	RS	INCHES		
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	1.95	2.30	2.47	0.077	0.091	0.097
A1	0.05	0.10	0.20	0.002	0.004	0.008
b	1.96	2.03	2.20	0.077	0.080	0.087
С	0.15	0.23	0.31	0.006	0.009	0.012
D	3.30	3.56	3.95	0.130	0.140	0.156
E	4.06	4.32	4.60	0.160	0.170	0.181
HE	5.21	5.44	5.60	0.205	0.214	0.220
L	0.76	1.02	1.60	0.030	0.040	0.063
L1		0.51 REF			0.020 REF	

## **GENERIC MARKING DIAGRAM\***





**Polarity Band** 

Non-Polarity Band

XXXXX = Specific Device Code = Assembly Location

= Year WW = Work Week = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98ASB42669B	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	SMB		PAGE 1 OF 1		

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves brisefin and of 160 m are trademarked so defined values of services and of the confined values and of the values of the confined values and of the values of the confined values and of the values of the special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales