Digital Transistors (BRT) R1 = 10 k Ω , R2 = ∞ k Ω

PNP Transistors with Monolithic Bias Resistor Network

This series of digital transistors is designed to replace a single device and its external resistor bias network. The Bias Resistor Transistor (BRT) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base-emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space.

Features

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS (T_A = 25° C)

Rating	Symbol	Max	Unit
Collector-Base Voltage	V _{CBO}	50	Vdc
Collector-Emitter Voltage	V _{CEO}	50	Vdc
Collector Current – Continuous	۱ _C	100	mAdc
Input Forward Voltage	V _{IN(fwd)}	40	Vdc
Input Reverse Voltage	V _{IN(rev)}	5	Vdc


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.




ON Semiconductor®

www.onsemi.com





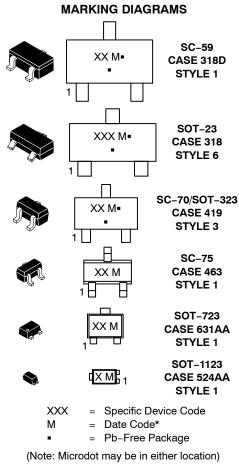

*Date Code orientation may vary depending upon manufacturing location.

ORDERING INFORMATION


See detailed ordering, marking, and shipping information in the package dimensions section on page 2 of this data sheet.

Table 1. ORDERING INFORMATION

Device	Part Marking	Package	Shipping [†]
MUN2115T1G	6E	SC–59 (Pb–Free)	3000 / Tape & Reel
MMUN2115LT1G	5LT1G A6E SOT (Pb-F		3000 / Tape & Reel
MUN5115T1G, SMUN5115T1G	6E	SC-70/SOT-323 (Pb-Free)	3000 / Tape & Reel
DTA114TET1G	6E	SC–75 (Pb–Free)	3000 / Tape & Reel
DTA114TM3T5G	6E	SOT-723 (Pb-Free)	8000 / Tape & Reel
NSBA114TF3T5G	L (90°)*	SOT-1123 (Pb-Free)	8000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

* $(xx^{\circ}) =$ Degree rotation in the clockwise direction.

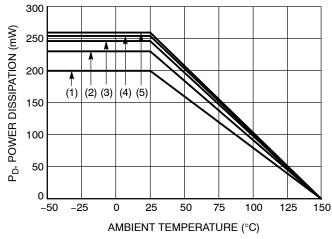

SC-75 and SC-70/SOT-323; Minimum Pad
SC-59; Minimum Pad
SOT-23; Minimum Pad
SOT-1123; 100 mm², 1 oz. copper trace
SOT-723; Minimum Pad

Figure 1. Derating Curve

Table 2. THERMAL CHARACTERISTICS

	Characteristic	Symbol	Мах	Unit
THERMAL CHARACTERISTI	CS (SC–59) (MUN2115)			
Total Device Dissipation $T_A = 25^{\circ}C$ (Note 1)		PD	230	mW
(Note 2) Derate above 25°C (Note 2)	(Note 1)		338 1.8 2.7	mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ hetaJA}$	540 370	°C/W
Thermal Resistance, Junction to Lead (Note 2)	(Note 1)	$R_{ extsf{ heta}JL}$	264 287	°C/W
Junction and Storage Temper	ature Range	T _J , T _{stg}	-55 to +150	°C
THERMAL CHARACTERISTI	CS (SOT–23) (MMUN2115L)			
$\begin{array}{l} \mbox{Total Device Dissipation} \\ T_A = 25^\circ C & (Note 1) \\ (Note 2) \\ \mbox{Derate above } 25^\circ C \\ (Note 2) \end{array}$	(Note 1)	PD	246 400 2.0 3.2	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	R _{θJA}	508 311	°C/W
Thermal Resistance, Junction to Lead (Note 2)	(Note 1)	R _{θJL}	174 208	°C/W
Junction and Storage Temper	ature Range	T _J , T _{stg}	–55 to +150	°C
THERMAL CHARACTERISTI	CS (SC-70/SOT-323) (MUN5115)			
Total Device Dissipation $T_A = 25^{\circ}C$ (Note 1) (Note 2) Derate above 25^{\circ}C (Note 2)	(Note 1)	PD	202 310 1.6 2.5	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	R _{θJA}	618 403	°C/W
Thermal Resistance, Junction to Lead (Note 2)	(Note 1)	R _{0JL}	280 332	°C/W
Junction and Storage Temper	ature Range	T _J , T _{stg}	–55 to +150	°C
THERMAL CHARACTERIST	CS (SC–75) (DTA114TE)			
$\begin{array}{l} \mbox{Total Device Dissipation} \\ T_A = 25^\circ C \qquad (Note 1) \\ (Note 2) \\ \mbox{Derate above } 25^\circ C \\ (Note 2) \end{array}$	(Note 1)	PD	200 300 1.6 2.4	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ hetaJA}$	600 400	°C/W
Junction and Storage Temper	ature Range	T _J , T _{stg}	–55 to +150	°C
THERMAL CHARACTERIST	CS (SOT-723) (DTA114TM3)			
$\begin{array}{l} \mbox{Total Device Dissipation} \\ T_A = 25^\circ C \qquad (Note 1) \\ (Note 2) \\ \mbox{Derate above } 25^\circ C \\ (Note 2) \end{array}$	(Note 1)	PD	260 600 2.0 4.8	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ heta JA}$	480 205	°C/W

2. FR-4 @ 1.0 x 1.0 Inch Pad.

FR-4 @ 100 mm², 1 oz. copper traces, still air.
FR-4 @ 500 mm², 1 oz. copper traces, still air.

Table 2. THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
THERMAL CHARACTERISTICS (SOT-1123) (NSBA114TF3)			
Total Device Dissipation $T_A = 25^{\circ}C$ (Note 3) (Note 4) Derate above 25^{\circ}C (Note 3) (Note 4)	PD	254 297 2.0 2.4	mW mW/°C
Thermal Resistance,(Note 3)Junction to Ambient(Note 4)	$R_{ extsf{ heta}JA}$	493 421	°C/W
Thermal Resistance, Junction to Lead (Note 3)	R _{θJL}	193	°C/W
Junction and Storage Temperature Range	T _J , T _{stg}	–55 to +150	°C

1. FR-4 @ Minimum Pad.


FR-4 @ Minimum Pad.
FR-4 @ 1.0 x 1.0 Inch Pad.
FR-4 @ 100 mm², 1 oz. copper traces, still air.
FR-4 @ 500 mm², 1 oz. copper traces, still air.

Table 3. ELECTRICAL CHARACTERISTICS (T_A = 25° C, unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
OFF CHARACTERISTICS					
Collector-Base Cutoff Current $(V_{CB} = 50 \text{ V}, I_E = 0)$	I _{CBO}	-	_	100	nAdc
Collector-Emitter Cutoff Current $(V_{CE} = 50 \text{ V}, I_B = 0)$	I _{CEO}	-	_	500	nAdc
Emitter-Base Cutoff Current $(V_{EB} = 6.0 \text{ V}, I_C = 0)$	I _{EBO}	-	_	0.9	mAdc
Collector–Base Breakdown Voltage $(I_C = 10 \ \mu A, I_E = 0)$	V _(BR) CBO	50	_	-	Vdc
Collector-Emitter Breakdown Voltage (Note 5) $(I_C = 2.0 \text{ mA}, I_B = 0)$	V _(BR) CEO	50	_	-	Vdc
ON CHARACTERISTICS					
DC Current Gain (Note 5) $(I_C = 5.0 \text{ mA}, V_{CE} = 10 \text{ V})$	h _{FE}	160	250	-	
Collector-Emitter Saturation Voltage (Note 5) $(I_C = 10 \text{ mA}, I_B = 0.3 \text{ mA})$	V _{CE(sat)}	-	_	0.25	Vdc
Input Voltage (off) $(V_{CE} = 5.0 \text{ V}, I_C = 100 \mu\text{A})$	V _{i(off)}	-	0.6	0.5	Vdc
Input Voltage (on) ($V_{CE} = 0.3 \text{ V}, I_C = 10 \text{ mA}$)	V _{i(on)}	1.7	1.2	-	Vdc
Output Voltage (on) (V _{CC} = 5.0 V, V _B = 2.5 V, R _L = 1.0 k Ω)	V _{OL}	_	_	0.2	Vdc
Output Voltage (off) (V _{CC} = 5.0 V, V _B = 0.25 V, R _L = 1.0 k Ω)	V _{OH}	4.9	_	-	Vdc
Input Resistor	R1	7.0	10	13	kΩ
Resistor Ratio	R ₁ /R ₂	-	-	-	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product

performance may not be indicated by the Electrical Characteristics if operated under different conditions. 5. Pulsed Condition: Pulse Width = 300 msec, Duty Cycle $\leq 2\%$.

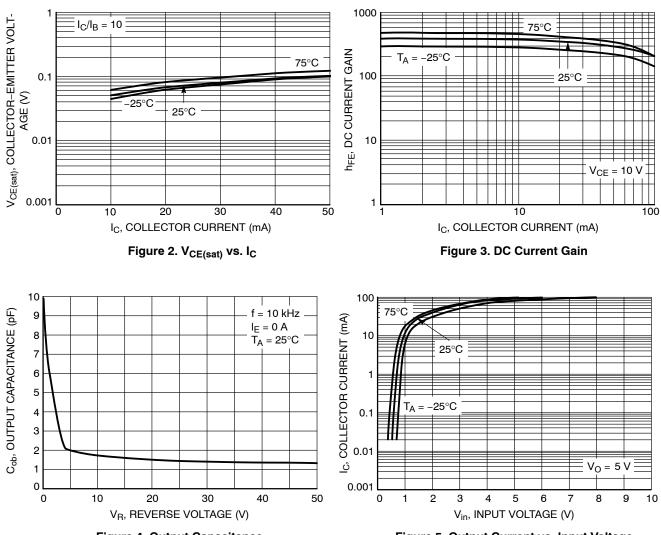

TYPICAL CHARACTERISTICS MUN2115, MMUN2115L, MUN5115, DTA114TE, DTA114TM3

Figure 4. Output Capacitance

Figure 5. Output Current vs. Input Voltage


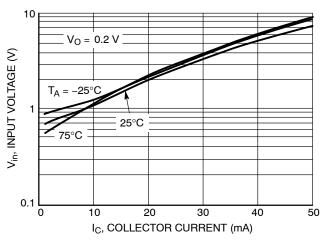



Figure 6. Input Voltage vs. Output Current

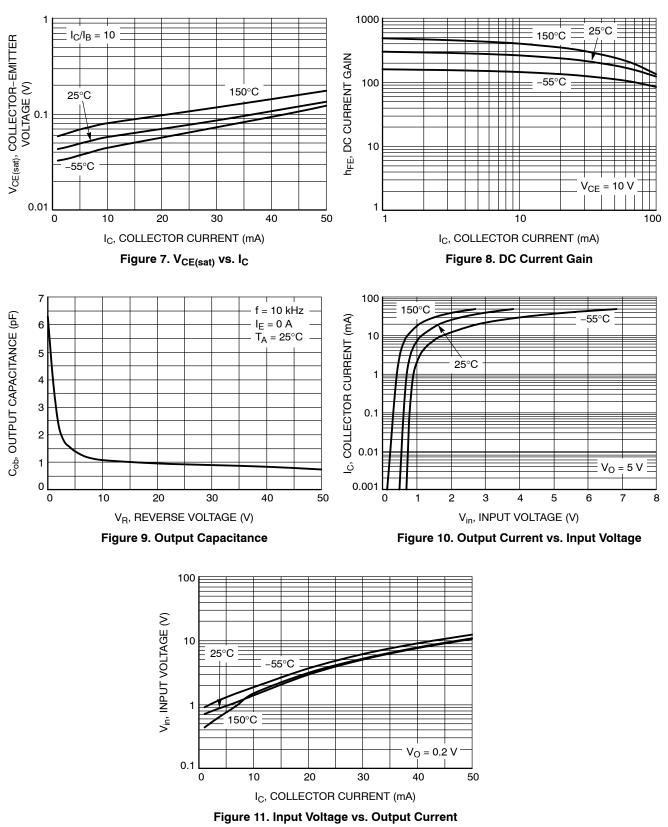

TYPICAL CHARACTERISTICS - NSBA114TF3

MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS

onsemi

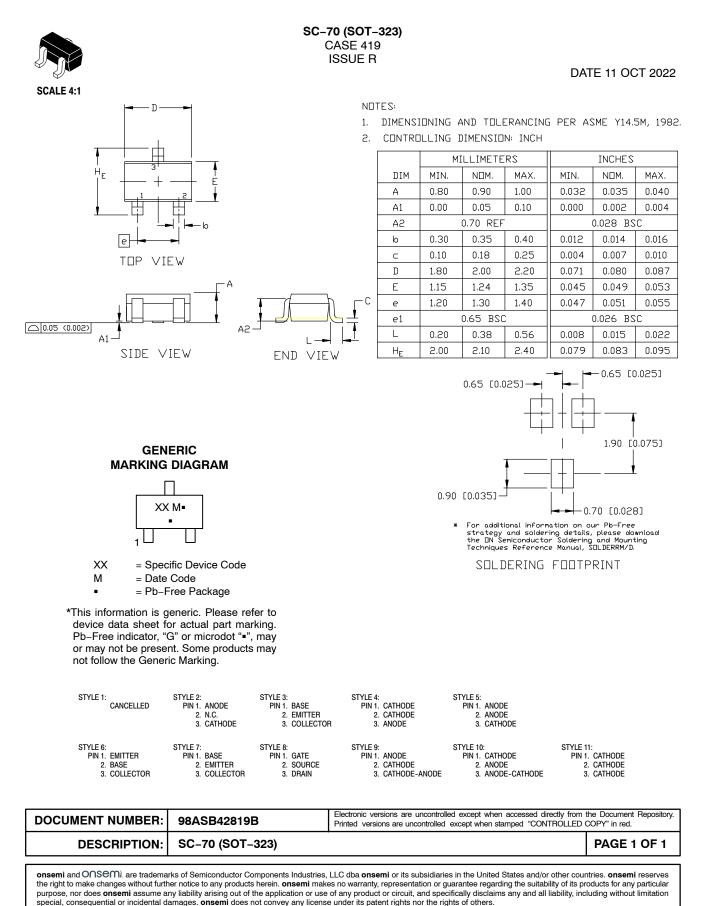

MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS

SC75-3 1.60x0.80x0.80, 1.00P **CASE 463 ISSUE H** DATE 01 FEB 2024 NOTES: Α D DIMENSIONING AND TOLERANCING CONFORM 1. В TO ASME Y14.5-2018. ALL DIMENSION ARE IN MILLIMETERS. 2. F MILLIMETERS F DIM MIN. MAX. NOM. 0.70 0.800.90 А 3X b Α1 0.00 0.05 0.10 \oplus 0.20 \oplus C A B е A2 0.80 REF. 0.15 0.20 b 0.30 TOP VIEW С 0.10 0.15 0.25 A2 D 1.55 1.60 1.65 E 1.50 1.60 1.70 E1 0.70 0.80 0.90 С 1.00 BSC е SEATING Ċ A1 L 0.20 PLANE 0.10 0.15 -0.356 END VIEW SIDE VIEW GENERIC **MARKING DIAGRAM*** 1.803 0.787XXM XX = Specific Device Code Μ = Date Code 0.508 = Pb-Free Package 1.000 *This information is generic. Please refer to device data sheet for actual part marking. RECOMMENDED MOUNTING FOOTPRINT* Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY not follow the Generic Marking. AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES STYLE 3: PIN 1. ANODE 2. ANODE STYLE 1: PIN 1. BASE 2. EMITTER STYLE 2: PIN 1. ANODE 2. N/C REFERENCE MANUAL, SOLDERRM/D. 3. COLLECTOR 3. CATHODE 3. CATHODE STYLE 4: STYLE 5: PIN 1. CATHODE 2. CATHODE PIN 1. GATE 2. SOURCE 3. ANODE 3. DRAIN Electronic versions are uncontrolled except when accessed directly from the Document Repository. DOCUMENT NUMBER: 98ASB15184C Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. **DESCRIPTION:** SC75-3 1.60x0.80x0.80, 1.00P PAGE 1 OF 1 onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019


```
www.onsemi.com
```

ONSEM¹.

Δ

В






DATE 18 JAN 2024

onsemi

NDTES:


- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
- 2. CONTROLLING DIMENSION: MILLIMETERS.
- 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS DF BASE MATERIAL.
- 4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

MILLIMETERS						
DIM	MIN	NDM	MAX			
A	0.34	0.37	0.40			
b	0,15	0.22	0.28			
b1	0.10	0,15	0.20			
С	0.07	0.12	0.17			
D	0.75	0.80	0.85			
E	0.55	0.60	0.65			
e	0.35	0.38	0,40			
Н	0,950	1.000	1.050			
L	0,185 REF					
L2	0.05 0.10 0.15					



RECOMMENDED Mounting footprint


*For additional information on our Pb-Free strategy and soldering details, please download th e DN Semiconductor Soldering and Mounting Techniques Reference manual, SDLDERRM/D.



TOP VIEW



GENERIC MARKING DIAGRAM*



X = Specific Device Code M = Date Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1:	STYLE 2:	STYLE 3:	STYLE 4:	STYLE 5:
PIN 1. BASE	PIN 1. ANODE	PIN 1. ANODE	PIN 1. CATHODE	PIN 1. GATE
2. EMITTER	2. N/C	2. ANODE	2. CATHODE	2. SOURCE
3. COLLECTOR	3. CATHODE	3. CATHODE	3. ANODE	3. DRAIN

DOCUMENT NUMBER:	98AON23134D	Electronic versions are uncontrolled except when accessed directly from the Document Repository Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.				
DESCRIPTION:	SOT-1123 0.80x0.60x0.37, 0.35P		PAGE 1 OF 1			
ansami and OOSEMU are trademarks of Semiconductor Components Industries LLC disa onsemi or its subsidiaries in the United States and/or other countries onsemi reserves						

the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights of others.

MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS




SOT-723 1.20x0.80x0.50, 0.40P CASE 631AA ISSUE E


DATE 24 JAN 2024

onsemi

NDTES:


- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018. CONTROLLING DIMENSION: MILLIMETERS. 1.
- 2.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH, MINIMUM З. LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- 4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.






SIDE VIEW

	MILLIMETERS				
DIM	MIN.	NDM.	MAX.		
А	0.45	0.50	0.55		
b	0.15	0.21	0.27		
b1	0.25	0.31	0.37		
С	0.07	0.12	0.17		
D	1.15	1.20	1.25		
E	0.75	0.80	0.85		
e		0.40 BSC			
Н	1.15	1.20	1.25		
L	0.29 REF				
L2	0.15	0.20	0.25		



*For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.



GENERIC **MARKING DIAGRAM***



XX = Specific Device Code Μ = Date Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1: PIN 1. BASE 2. EMITTER 3. COLLECTOR	STYLE 2: PIN 1. ANODE 2. N/C 3. CATHODE	STYLE 3: PIN 1. ANODE 2. ANODE 3. CATHODE	STYLE 4: PIN 1. CATH 2. CATH 3. ANOE	ODE 2. SOURCE			
DOCUMENT NUMBER: 98AON12989D Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.							Repository.
DESCRIPTION: SOT-723 1.20x0.80x0.50,						PAGE 1	OF 1
					s in the United States and/or other countr		

purpose, nor does onsemi assume an yiability arising out of the application or use of any product or circuit, and specificative displants any and that it is in the interview of the application or use of any product or circuit, and specification and any any parameters and any parameters any paramet special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>