Digital Transistors (BRT) R1 = 10 k Ω , R2 = ∞ k Ω

NPN Transistors with Monolithic Bias Resistor Network

This series of digital transistors is designed to replace a single device and its external resistor bias network. The Bias Resistor Transistor (BRT) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base–emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space.

Features

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS (T_A = 25° C)

| Rating | Symbol | Max | Unit |
|--------------------------------|----------------------|-----|------|
| Collector-Base Voltage | V _{CBO} | 50 | Vdc |
| Collector-Emitter Voltage | V _{CEO} | 50 | Vdc |
| Collector Current – Continuous | Ι _C | 100 | mAdc |
| Input Forward Voltage | V _{IN(fwd)} | 40 | Vdc |
| Input Reverse Voltage | V _{IN(rev)} | 6 | Vdc |


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.




ON Semiconductor®

www.onsemi.com





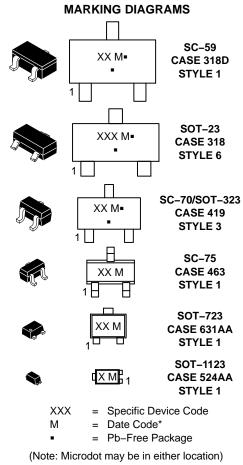

*Date Code orientation may vary depending upon manufacturing location.

ORDERING INFORMATION

See detailed ordering, marking, and shipping information in the package dimensions section on page 2 of this data sheet.


Table 1. ORDERING INFORMATION

| Device | Part Marking | Package | Shipping [†] |
|------------------------------|--------------|----------------------------|-----------------------|
| MUN2215T1G | 8E | SC-59 (Pb-Free) | 3000 / Tape & Reel |
| MMUN2215LT1G, SMMUN2215LT1G* | A8E | SOT-23 (Pb-Free) | 3000 / Tape & Reel |
| MUN5215T1G, SMUN5215T1G* | 8E | SC-70/SOT-323 (Pb-Free) | 3000 / Tape & Reel |
| DTC114TET1G | 8E | SC-75 (Pb-Free) | 3000 / Tape & Reel |
| DTC114TM3T5G | 8E | SOT-723 (Pb-Free) | 8000 / Tape & Reel |
| NSBC114TF3T5G | K (90°) | SOT-1123 (Pb-Free) | 8000 / Tape & Reel |

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

*S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q101 Qualified and PPAP Capable.

* (xx°) = Degree rotation in the clockwise direction.

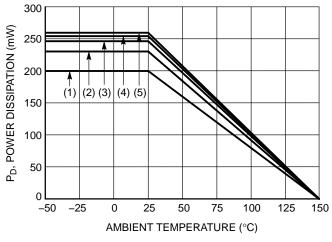

(1) SC-75 and SC-70/SOT-323; Minimum Pad
(2) SC-59; Minimum Pad
(3) SOT-23; Minimum Pad
(4) SOT-1123; 100 mm², 1 oz. copper trace
(5) SOT-723; Minimum Pad

Figure 1. Derating Curve

Table 2. THERMAL CHARACTERISTICS

| | Characteristic | Symbol | Max | Unit |
|--|------------------------------|-----------------------------------|--------------------------|-------------|
| THERMAL CHARACTERISTIC | CS (SC–59) (MUN2215) | | | |
| Total Device Dissipation $T_A = 25^{\circ}C$ (Note 1) (Note 2) Derate above 25^{C} | (Note 1) | P _D | 230 338 1.8 | mW mW/°C |
| (Note 2) Thermal Resistance, | (Note 1) | R _{θJA} | 2.7 540 | °C/W |
| Junction to Ambient | (Note 2) | | 370 | 00.004 |
| Thermal Resistance, Junction to Lead (Note 2) | (Note 1) | R _{θJL} | 264 287 | °C/W |
| Junction and Storage Temper | ature Range | T _J , T _{stg} | -55 to +150 | °C |
| THERMAL CHARACTERISTIC | CS (SOT–23) (MMUN2215L) | | | |
| Total Device Dissipation $T_A = 25^{\circ}C$ (Note 1) (Note 2) Derate above 25^{C} (Note 2) | (Note 1) | P _D | 246 400 2.0 3.2 | mW mW/°C |
| Thermal Resistance, Junction to Ambient | (Note 1) (Note 2) | $R_{	heta JA}$ | 508 311 | °C/W |
| Thermal Resistance, Junction to Lead (Note 2) | (Note 1) | $R_{	ext{	heta}JL}$ | 174 208 | °C/W |
| Junction and Storage Temper | ature Range | T _J , T _{stg} | -55 to +150 | °C |
| THERMAL CHARACTERISTIC | CS (SC-70/SOT-323) (MUN5215) | | | |
| Total Device Dissipation $T_A = 25^{\circ}C$ (Note 1) (Note 2) | | P _D | 202 310 | mW |
| Derate above 25°C (Note 2) | (Note 1) | | 1.6 2.5 | m₩/°C |
| Thermal Resistance, Junction to Ambient | (Note 1) (Note 2) | $R_{	heta JA}$ | 618 403 | °C/W |
| Thermal Resistance, Junction to Lead (Note 2) | (Note 1) | R _{θJL} | 280 332 | °C/W |
| Junction and Storage Temper | ature Range | T _J , T _{stg} | -55 to +150 | °C |
| THERMAL CHARACTERISTIC | CS (SC–75) (DTC114TE) | | | |
| Total Device Dissipation $T_A = 25^{\circ}C$ (Note 1) (Note 2) Derate above 25^{\circ}C (Note 2) | (Note 1) | PD | 200 300 1.6 2.4 | mW mW/°C |
| Thermal Resistance, Junction to Ambient | (Note 1) (Note 2) | R _{θJA} | 600 400 | °C/W |
| Junction and Storage Temper | ature Range | T _J , T _{stg} | –55 to +150 | °C |
| THERMAL CHARACTERISTIC | CS (SOT-723) (DTC114TM3) | | | |
| Total Device Dissipation $T_A = 25^{\circ}C$ (Note 1) (Note 2) Derate above 25^{C} (Note 2) | (Note 1) | PD | 260 600 2.0 4.8 | mW mW/°C |
| Thermal Resistance, Junction to Ambient | (Note 1) (Note 2) | R _{θJA} | 480 205 | °C/W |
| Junction and Storage Temper | ature Range | T _J , T _{stg} | -55 to +150 | °C |
| 1. FR-4 @ Minimum Pad. | | | | |

FR-4 @ 1.0 x 1.0 Inch Pad.
 FR-4 @ 100 mm², 1 oz. copper traces, still air.
 FR-4 @ 500 mm², 1 oz. copper traces, still air.

Table 2. THERMAL CHARACTERISTICS

| Characteristic | Symbol | Max | Unit |
|---|-----------------------------------|--------------------------|-------------|
| THERMAL CHARACTERISTICS (SOT-1123) (NSBC114TF3) | | | |
| $ \begin{array}{l} \mbox{Total Device Dissipation} \\ T_A = 25^\circ C & (Note 3) \\ (Note 4) \\ \mbox{Derate above } 25^\circ C & (Note 3) \\ (Note 4) \end{array} $ | PD | 254 297 2.0 2.4 | m₩ mW/°C |
| Thermal Resistance,(Note 3)Junction to Ambient(Note 4) | $R_{	heta JA}$ | 493 421 | °C/W |
| Thermal Resistance, Junction to Lead (Note 3) | $R_{	extsf{	heta}JL}$ | 193 | °C/W |
| Junction and Storage Temperature Range | T _J , T _{stg} | -55 to +150 | °C |

1. FR-4 @ Minimum Pad.


FR-4 @ 1.0 x 1.0 Inch Pad.
 FR-4 @ 100 mm², 1 oz. copper traces, still air.
 FR-4 @ 500 mm², 1 oz. copper traces, still air.

Table 3. ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}C$, unless otherwise noted)


| Characteristic | Symbol | Min | Тур | Max | Unit |
|---|--------------------------------|-----|-----|------|------|
| OFF CHARACTERISTICS | | | | | |
| Collector–Base Cutoff Current ($V_{CB} = 50 \text{ V}, I_E = 0$) | I _{CBO} | _ | _ | 100 | nAdc |
| Collector–Emitter Cutoff Current ($V_{CE} = 50 V$, $I_B = 0$) | I _{CEO} | - | - | 500 | nAdc |
| Emitter–Base Cutoff Current ($V_{EB} = 6.0 \text{ V}, I_C = 0$) | I _{EBO} | - | _ | 0.9 | mAdc |
| Collector–Base Breakdown Voltage $(I_C = 10 \ \mu A, I_E = 0)$ | V _{(BR)CBO} | 50 | _ | - | Vdc |
| Collector–Emitter Breakdown Voltage (Note 5) $(I_C = 2.0 \text{ mA}, I_B = 0)$ | V _(BR) CEO | 50 | _ | - | Vdc |
| ON CHARACTERISTICS | | | | | |
| DC Current Gain (Note 5) $(I_C = 5.0 \text{ mA}, V_{CE} = 10 \text{ V})$ | h _{FE} | 160 | 350 | - | |
| Collector–Emitter Saturation Voltage (Note 5) $(I_C = 10 \text{ mA}, I_B = 1.0 \text{ mA})$ | V _{CE(sat)} | - | _ | 0.25 | Vdc |
| Input Voltage (off) ($V_{CE} = 5.0 \text{ V}, I_C = 100 \mu \text{A}$) | V _{i(off)} | - | 0.6 | 0.5 | Vdc |
| Input Voltage (on) ($V_{CE} = 0.3 \text{ V}, I_C = 10 \text{ mA}$) | V _{i(on)} | 1.7 | 1.2 | - | Vdc |
| Output Voltage (on) (V _{CC} = 5.0 V, V _B = 2.5 V, R _L = 1.0 k Ω) | V _{OL} | - | - | 0.2 | Vdc |
| Output Voltage (off) $(V_{CC} = 5.0 \text{ V}, V_B = 0.25 \text{ V}, R_L = 1.0 \text{ k}\Omega)$ | V _{OH} | 4.9 | _ | - | Vdc |
| Input Resistor | R1 | 7.0 | 10 | 13 | kΩ |
| Resistor Ratio | R ₁ /R ₂ | - | - | - | |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product

performance may not be indicated by the Electrical Characteristics if operated under different conditions. 5. Pulsed Condition: Pulse Width = 300 msec, Duty Cycle $\leq 2\%$.

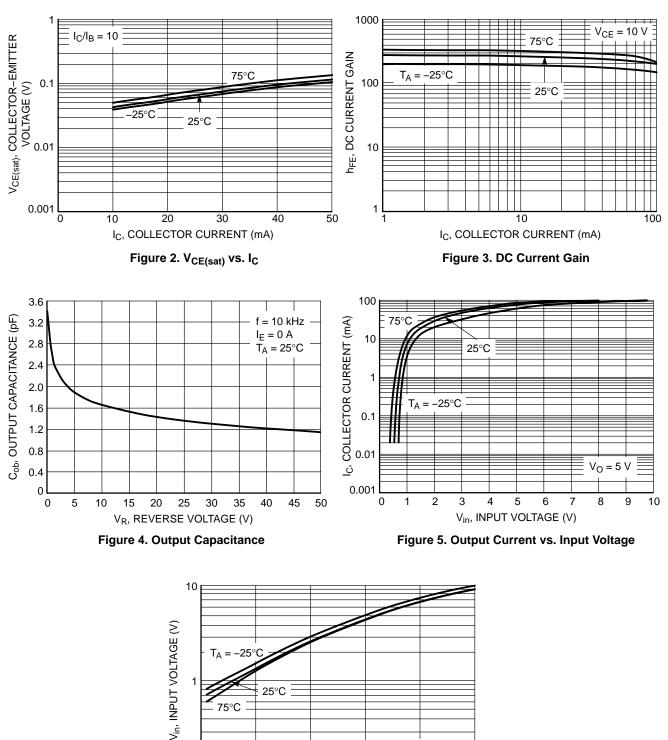

TYPICAL CHARACTERISTICS MUN2215, MMUN2215L, MUN5215, DTC114TE, DTC114TM3



30

20

V_O = 0.2 V

40


50

25

75°C

0.1 0 25°C

10

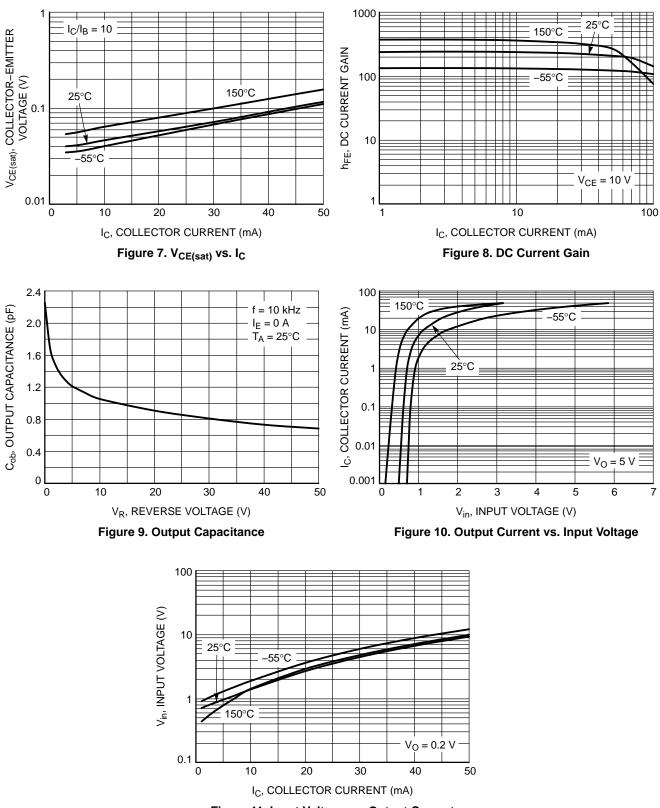


TYPICAL CHARACTERISTICS – NSBC114TF3

Figure 11. Input Voltage vs. Output Current

MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS

onsemi

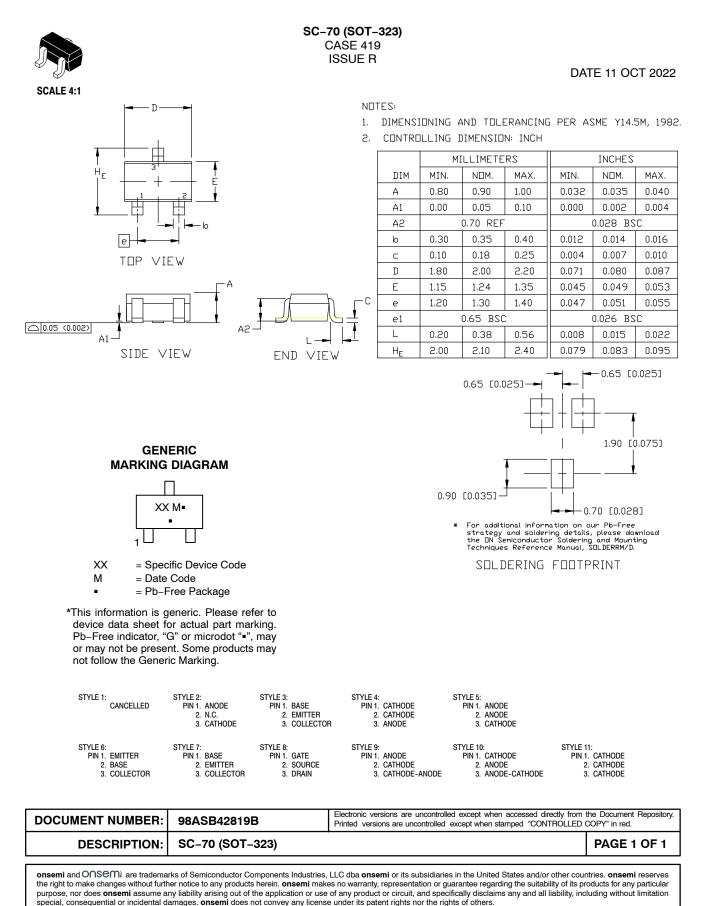

MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS

SC75-3 1.60x0.80x0.80, 1.00P **CASE 463 ISSUE H** DATE 01 FEB 2024 NOTES: Α D DIMENSIONING AND TOLERANCING CONFORM 1. В TO ASME Y14.5-2018. ALL DIMENSION ARE IN MILLIMETERS. 2. F MILLIMETERS F DIM MIN. MAX. NOM. 0.70 0.800.90 А 3X b Α1 0.00 0.05 0.10 \oplus 0.20 \oplus C A B е A2 0.80 REF. 0.15 0.20 b 0.30 TOP VIEW С 0.10 0.15 0.25 A2 D 1.55 1.60 1.65 E 1.50 1.60 1.70 E1 0.70 0.80 0.90 С 1.00 BSC е SEATING Ċ A1 L 0.20 PLANE 0.10 0.15 -0.356 END VIEW SIDE VIEW GENERIC **MARKING DIAGRAM*** 1.803 0.787XXM XX = Specific Device Code Μ = Date Code 0.508 = Pb-Free Package 1.000 *This information is generic. Please refer to device data sheet for actual part marking. RECOMMENDED MOUNTING FOOTPRINT* Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY not follow the Generic Marking. AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES STYLE 3: PIN 1. ANODE 2. ANODE STYLE 1: PIN 1. BASE 2. EMITTER STYLE 2: PIN 1. ANODE 2. N/C REFERENCE MANUAL, SOLDERRM/D. 3. COLLECTOR 3. CATHODE 3. CATHODE STYLE 4: STYLE 5: PIN 1. CATHODE 2. CATHODE PIN 1. GATE 2. SOURCE 3. ANODE 3. DRAIN Electronic versions are uncontrolled except when accessed directly from the Document Repository. DOCUMENT NUMBER: 98ASB15184C Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. **DESCRIPTION:** SC75-3 1.60x0.80x0.80, 1.00P PAGE 1 OF 1 onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019


```
www.onsemi.com
```

ONSEM¹.

Δ

В






DATE 18 JAN 2024

onsemi

NDTES:


- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
- 2. CONTROLLING DIMENSION: MILLIMETERS.
- 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS DF BASE MATERIAL.
- 4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

| MILLIMETERS | | | | | | |
|-------------|----------------|-------|-------|--|--|--|
| DIM | MIN | NDM | MAX | | | |
| A | 0.34 | 0.37 | 0.40 | | | |
| b | 0,15 | 0.22 | 0.28 | | | |
| b1 | 0.10 | 0,15 | 0.20 | | | |
| С | 0.07 | 0.12 | 0.17 | | | |
| D | 0.75 | 0.80 | 0.85 | | | |
| E | 0.55 | 0.60 | 0.65 | | | |
| e | 0.35 | 0.38 | 0,40 | | | |
| Н | 0,950 | 1.000 | 1.050 | | | |
| L | 0,185 REF | | | | | |
| L2 | 0.05 0.10 0.15 | | | | | |



RECOMMENDED Mounting footprint


*For additional information on our Pb-Free strategy and soldering details, please download th e DN Semiconductor Soldering and Mounting Techniques Reference manual, SDLDERRM/D.



TOP VIEW



GENERIC MARKING DIAGRAM*



X = Specific Device Code M = Date Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

| STYLE 1: | STYLE 2: | STYLE 3: | STYLE 4: | STYLE 5: |
|--------------|--------------|--------------|----------------|-------------|
| PIN 1. BASE | PIN 1. ANODE | PIN 1. ANODE | PIN 1. CATHODE | PIN 1. GATE |
| 2. EMITTER | 2. N/C | 2. ANODE | 2. CATHODE | 2. SOURCE |
| 3. COLLECTOR | 3. CATHODE | 3. CATHODE | 3. ANODE | 3. DRAIN |

| DOCUMENT NUMBER: | 98AON23134D | Electronic versions are uncontrolled except when accessed directly from the Document Repository Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | | | |
|---|--------------------------------|--|-------------|--|--|--|
| DESCRIPTION: | SOT-1123 0.80x0.60x0.37, 0.35P | | PAGE 1 OF 1 | | | |
| ansami and OOSEM) are trademarks of Semiconductor Components Industries LLC disa ansami or its subsidiaries in the United States and/or other countries ansami reserves | | | | | | |

the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights of others.

MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS




SOT-723 1.20x0.80x0.50, 0.40P CASE 631AA ISSUE E


DATE 24 JAN 2024

onsemi

NDTES:


- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018. CONTROLLING DIMENSION: MILLIMETERS. 1.
- 2.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH, MINIMUM З. LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- 4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.






SIDE VIEW

| | MILLIMETERS | | | | |
|-----|-------------|----------|------|--|--|
| DIM | MIN. | NDM. | MAX. | | |
| А | 0.45 | 0.50 | 0.55 | | |
| b | 0.15 | 0.21 | 0.27 | | |
| b1 | b1 0.25 | | 0.37 | | |
| С | 0.07 | 0.12 | 0.17 | | |
| D | 1.15 | 1.20 | 1.25 | | |
| E | 0.75 | 0.80 | 0.85 | | |
| e | | 0.40 BSC | | | |
| Н | 1.15 | 1.20 | 1.25 | | |
| L | 0.29 REF | | | | |
| L2 | 0.15 | 0.20 | 0.25 | | |



*For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.



GENERIC **MARKING DIAGRAM***



XX = Specific Device Code Μ = Date Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

| STYLE 1: PIN 1. BASE 2. EMITTER 3. COLLECTOR | STYLE 2: PIN 1. ANODE 2. N/C 3. CATHODE | STYLE 3: PIN 1. ANODE 2. ANODE 3. CATHODE | STYLE 4: PIN 1. CATH 2. CATH 3. ANOE | ODE 2. SOURCE | | | |
|---|--|--|---|---------------|--|--------|-------------|
| DOCUMENT NUMBER: 98AON12989D Electronic versions are uncontrolled except when accessed directly from the Document Reposite Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | | | | | | Repository. |
| DESCRIPTION: SOT-723 1.20x0.80x0.50, | | | | | | PAGE 1 | OF 1 |
| | | | | | s in the United States and/or other countr | | |

purpose, nor does onsemi assume an yiability arising out of the application or use of any product or circuit, and specificative displants any and that it is in the interview of the application or use of any product or circuit, and specification and any any parameters and any parameters any paramet special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>