

# Digital Transistors (BRT) R1 = 47 k $\Omega$ , R2 = 47 k $\Omega$

NPN Transistors with Monolithic Bias Resistor Network

# MUN2213, MMUN2213L, MUN5213, DTC144EE, DTC144EM3, NSBC144EF3

This series of digital transistors is designed to replace a single device and its external resistor bias network. The Bias Resistor Transistor (BRT) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base–emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space.

# **Features**

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant


# MAXIMUM RATINGS (T<sub>A</sub> = 25°C)

Rating	Symbol	Max	Unit
Collector-Base Voltage	$V_{CBO}$	50	Vdc
Collector-Emitter Voltage	$V_{CEO}$	50	Vdc
Collector Current - Continuous	I <sub>C</sub>	100	mAdc
Input Forward Voltage	V <sub>IN(fwd)</sub>	40	Vdc
Input Reverse Voltage	V <sub>IN(rev)</sub>	10	Vdc


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1

## **PIN CONNECTIONS**



# MARKING DIAGRAMS

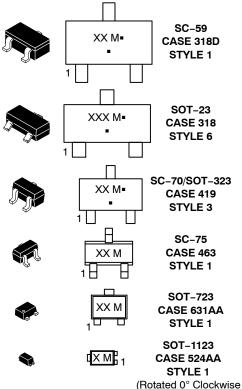

XXX = Specific Device Code

M = Date Code\*

Pb-Free Package

(Note: Microdot may be in either location)\*Date Code orientation may vary depending upon manufacturing location.

## **ORDERING INFORMATION**

See detailed ordering, marking, and shipping information on page 2 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 2.

**Table 1. ORDERING INFORMATION** 


Device	Part Marking	Package	Shipping <sup>†</sup>
MUN2213T1G, SMUN2213T1G*	8C	SC-59 (Pb-Free)	3000 / Tape & Reel
MMUN2213LT1G, SMMUN2213LT1G*	A8C	SOT-23 (Pb-Free)	3000 / Tape & Reel
SMMUN2213LT3G	A8C	SOT-23 (Pb-Free)	10000 / Tape & Reel
MUN5213T1G, SMUN5213T1G*	8C	SC-70/SOT-323 (Pb-Free)	3000 / Tape & Reel
DTC144EET1G, SDTC144EET1G*	8C	SC-75 (Pb-Free)	3000 / Tape & Reel
DTC144EM3T5G, NSVDTC144EM3T5G*	8C	SOT-723 (Pb-Free)	8000 / Tape & Reel

#### **DISCONTINUED** (Note 1)

NSBC144EF3T5G	D	SOT-1123	8000 / Tape & Reel
		(Pb-Free)	

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

<sup>1.</sup> **DISCONTINUED:** This device is not recommended for new design. Please contact your **onsemi** representative for information. The most current information on this device may be available on <a href="https://www.onsemi.com">www.onsemi.com</a>.

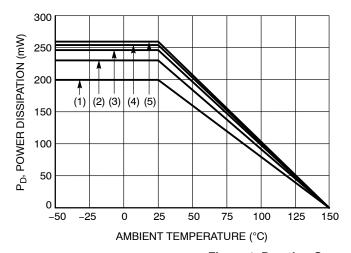

- (1) SC-75 and SC-70/SOT323; Minimum Pad
- (2) SC-59; Minimum Pad
- (3) SOT-23; Minimum Pad
- (4) SOT-1123; 100 mm<sup>2</sup>, 1 oz. copper trace
- (5) SOT-723; Minimum Pad

Figure 1. Derating Curve

**Table 2. THERMAL CHARACTERISTICS** 

	Characteristic	Symbol	Max	Unit			
THERMAL CHARACTERISTICS (SC-59) (MUN2213)							
Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C	(Note 2) (Note 3) (Note 2) (Note 3)	P <sub>D</sub>	230 338 1.8 2.7	mW mW/°C			
Thermal Resistance, Junction to Ambient	(Note 2) (Note 3)	$R_{ hetaJA}$	540 370	°C/W			
Thermal Resistance Junction to Lead	(Note 2) (Note 3)	$R_{ hetaJL}$	264 287	°C/W			
Junction and Storage Tem	Junction and Storage Temperature Range		-55 to +150	°C			

<sup>\*</sup>S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

**Table 2. THERMAL CHARACTERISTICS** 

	Characteristic	Symbol	Max	Unit
THERMAL CHARACTERIST	ICS (SOT-23) (MMUN2213L)		•	
Total Device Dissipation $T_{A} = 25^{\circ}C$ (Note 3)	(Note 2)	P <sub>D</sub>	246 400	mW
Derate above 25°C (Note 3)	(Note 2)		2.0 3.2	mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 3)	$R_{ heta JA}$	508 311	°C/W
Thermal Resistance, Junction to Lead	(Note 2) (Note 3)	$R_{ hetaJL}$	174 208	°C/W
Junction and Storage Temper	rature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERIST	ICS (SC-70/SOT-323) (MUN5213)			
Total Device Dissipation T <sub>A</sub> = 25°C Derate above 25°C	(Note 2) (Note 3) (Note 2) (Note 3)	P <sub>D</sub>	202 310 1.6 2.5	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 2) (Note 3)	$R_{ hetaJA}$	618 403	°C/W
Thermal Resistance, Junction to Lead	(Note 2) (Note 3)	$R_{ hetaJL}$	280 332	°C/W
Junction and Storage Temper	rature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERIST	ICS (SC-75) (DTC144EE, SDTC144EE)	<u> </u>		
Total Device Dissipation		P <sub>D</sub>		
T <sub>A</sub> = 25°C Derate above 25°C	(Note 2) (Note 3) (Note 2) (Note 3)		200 300 1.6 2.4	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 2) (Note 3)	$R_{ hetaJA}$	600 400	°C/W
Junction and Storage Temper	rature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERIST	ICS (SOT-723) (DTC144EM3)	j		
Total Device Dissipation	44.4.0	P <sub>D</sub>		,,,
T <sub>A</sub> = 25°C Derate above 25°C	(Note 2) (Note 3) (Note 2)		260 600 2.0	mW mW/°C
	(Note 3)		4.8	
Thermal Resistance, Junction to Ambient	(Note 2) (Note 3)	$R_{ hetaJA}$	480 205	°C/W
Junction and Storage Temper	rature Range	$T_J$ , $T_{stg}$	-55 to +150	°C
THERMAL CHARACTERIST	ICS (SOT-1123) (NSBC144EF3)			
Total Device Dissipation $T_A = 25^{\circ}C$	(Note 4) (Note 5)	$P_{D}$	254 297	mW
Derate above 25°C	(Note 4) (Note 5)		2.0 2.4	mW/°C
Thermal Resistance, Junction to Ambient	(Note 4) (Note 5)	$R_{ hetaJA}$	493 421	°C/W
Thermal Resistance, Junction to Lead	(Note 4)	$R_{ hetaJL}$	193	°C/W
Junction and Storage Temper	ature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C

- 2. FR-4 @ Minimum Pad.
- 3. FR-4 @ 1.0 x 1.0 Inch Pad.
- 4. FR-4 @ 100 mm², 1 oz. copper traces, still air.
  5. FR-4 @ 500 mm², 1 oz. copper traces, still air.

Table 3. ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C, unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
OFF CHARACTERISTICS		•	•	•	
Collector–Base Cutoff Current $(V_{CB} = 50 \text{ V}, I_E = 0)$	I <sub>CBO</sub>	_	_	100	nAdc
Collector–Emitter Cutoff Current (V <sub>CE</sub> = 50 V, I <sub>B</sub> = 0)	I <sub>CEO</sub>	-	-	500	nAdc
Emitter-Base Cutoff Current (V <sub>EB</sub> = 6.0 V, I <sub>C</sub> = 0)	I <sub>EBO</sub>	-	-	0.1	mAdc
Collector–Base Breakdown Voltage $(I_C = 10 \mu A, I_E = 0)$	V <sub>(BR)</sub> CBO	50	-	_	Vdc
Collector–Emitter Breakdown Voltage (Note 6) (I <sub>C</sub> = 2.0 mA, I <sub>B</sub> = 0)	V <sub>(BR)</sub> CEO	50	-	_	Vdc
ON CHARACTERISTICS	-				
DC Current Gain (Note 6) (I <sub>C</sub> = 5.0 mA, V <sub>CE</sub> = 10 V)	h <sub>FE</sub>	80	140	_	
Collector–Emitter Saturation Voltage (Note 6) (I <sub>C</sub> = 10 mA, I <sub>B</sub> = 0.3 mA)	V <sub>CE(sat)</sub>	-	-	0.25	Vdc
Input Voltage (off) ( $V_{CE} = 5.0 \text{ V}, I_{C} = 100 \mu\text{A}$ )	V <sub>i(off)</sub>	-	1.2	0.8	Vdc
Input Voltage (on) $(V_{CE} = 0.3 \text{ V}, I_{C} = 2.0 \text{ mA})$	V <sub>i(on)</sub>	3.0	1.6	_	Vdc
Output Voltage (on) (V <sub>CC</sub> = 5.0 V, V <sub>B</sub> = 3.5 V, R <sub>L</sub> = 1.0 k $\Omega$ )	V <sub>OL</sub>	-	-	0.2	Vdc
Output Voltage (off) ( $V_{CC} = 5.0 \text{ V}, V_B = 0.5 \text{ V}, R_L = 1.0 \text{ k}\Omega$ )	V <sub>OH</sub>	4.9	-	_	Vdc
Input Resistor	R1	32.9	47	61.1	kΩ
Resistor Ratio	R <sub>1</sub> /R <sub>2</sub>	0.8	1.0	1.2	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

6. Pulsed Condition: Pulse Width = 300 msec, Duty Cycle < 2%.

# TYPICAL CHARACTERISTICS MUN2213, MMUN2213L, MUN5213, DTC144EE, SDTC144EE, DTC144EM3

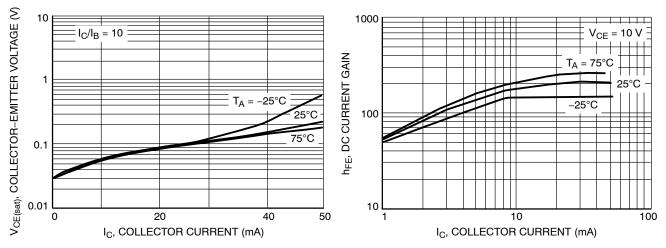


Figure 2. V<sub>CE(sat)</sub> vs. I<sub>C</sub>

Figure 3. DC Current Gain

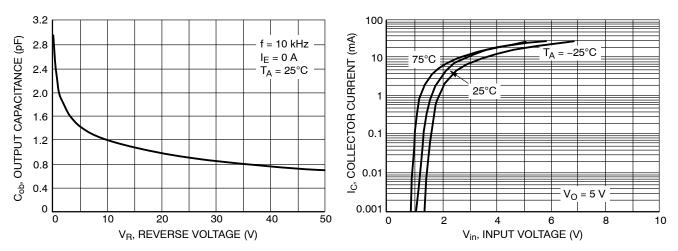


Figure 4. Output Capacitance

Figure 5. Output Current vs. Input Voltage




Figure 6. Input Voltage vs. Output Current

# **TYPICAL CHARACTERISTICS - NSBC144EF3**

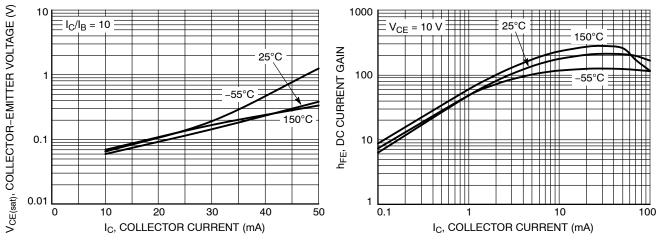


Figure 7.  $V_{CE(sat)}$  vs.  $I_{C}$ 

Figure 8. DC Current Gain

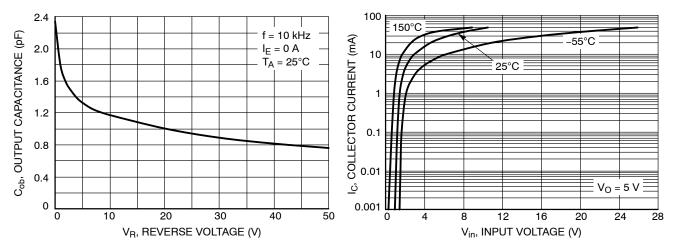


Figure 9. Output Capacitance

Figure 10. Output Current vs. Input Voltage




Figure 11. Input Voltage vs. Output Current

# **PACKAGE DIMENSIONS**




SC-59-3 2.90x1.50x1.15, 1.90P CASE 318D **ISSUE J** 


**DATE 15 FEB 2024** 


#### NOTES:

- DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5-2018.
- ALL DIMENSION ARE IN MILLIMETERS.

	MILLIMETERS				
DIM	MIN.	NOM.	MAX.		
Α	1.00	1.15	1.30		
A1	0.01	0.06	0.10		
Ф	0.35	0.43	0.50		
C	0.09	0.14	0.18		
D	2.70	2.90	3.10		
E	2.50	2.80	3.00		
E1	1.30	1.50	1.70		
е	1.90 BSC				
L	0.20	0.40	0.60		








#### RECOMMENDED MOUNTING FOOTPRINT\*

FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.



**GENERIC MARKING DIAGRAM\*** 



XXX = Specific Device Code

= Date Code M

= Pb-Free Package\*

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "=", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1: PIN 1. BASE STYLE 2: PIN 1. ANODE PIN 1. ANODE 2. EMITTER 2. N.C. 3. CATHODE 3. CATHODE 3. COLLECTOR

STYLE 4: PIN 1. CATHODE STYLE 5: STYLE 6: PIN 1. CATHODE PIN 1. ANODE 2. CATHODE 2. N.C. 2 CATHODE 3. ANODE 3. ANODE/CATHODE

**MILLIMETERS** 

MIN

0.89

0.01

0.37

0.08

2.80

1.20

1.78

0.30

0.35

2.10

O°

NOM

1.00

0.06

0.44

0.14

2.90

1.30

1.90

0.43

0.54

2.40

\_\_\_





## SOT-23 (TO-236) 2.90x1.30x1.00 1.90P **CASE 318 ISSUE AU**

**DATE 14 AUG 2024** 

MAX

1.11

0.10

0.50

0.20

3.04

1.40


2.04


0.55

0.69


2.64


10°





DETAIL "A" Scale 3:1





# 2.90 3X 0.95 3X 0.56 -0.95 PITCH

#### NOTES:

DIM

Α

Α1

b

С

D

Ε

е L

L1

HE

Τ

- DIMENSIONING AND TOLERANCING 1. PER ASME Y14.5M, 2018. CONTROLLING DIMENSIONS:
- MILLIMETERS.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE
- BASE MATERIAL.
  DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

# **GENERIC MARKING DIAGRAM\***



XXX = Specific Device Code

= Date Code

= Pb-Free Package



\* For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## **STYLES ON PAGE 2**

DOCUMENT NUMBER:	98ASB42226B	Electronic versions are uncontrolled except when accessed directly from the Document Reposi Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-23 (TO-236) 2.90x1.30x1.00 1.90P		PAGE 1 OF 2

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

<sup>\*</sup>This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "=", may or may not be present. Some products may not follow the Generic Marking.

# SOT-23 (TO-236) 2.90x1.30x1.00 1.90P CASE 318 ISSUE AU

DATE 14 AUG 2024

STYLE 1 THRU 5: CANCELLED	STYLE 6: PIN 1. BASE 2. EMITTER 3. COLLECTOR			
STYLE 9: PIN 1. ANODE 2. ANODE 3. CATHODE	STYLE 10: PIN 1. DRAIN 2. SOURCE 3. GATE	2. CATHODE 2.	2: STYLE 13: CATHODE PIN 1. SOURCE CATHODE 2. DRAIN ANODE 3. GATE	STYLE 14: PIN 1. CATHODE 2. GATE 3. ANODE
STYLE 15: PIN 1. GATE 2. CATHODE 3. ANODE	STYLE 16: PIN 1. ANODE 2. CATHODE 3. CATHODE	2. ANODE 2.	3: STYLE 19: NO CONNECTION PIN 1. CATHODE CATHODE 2. ANODE ANODE 3. CATHODE-ANODE	STYLE 20: PIN 1. CATHODE 2. ANODE 3. GATE
STYLE 21: PIN 1. GATE 2. SOURCE 3. DRAIN	STYLE 22: PIN 1. RETURN 2. OUTPUT 3. INPUT			STYLE 26: PIN 1. CATHODE 2. ANODE 3. NO CONNECTION
STYLE 27: PIN 1. CATHODE 2. CATHODE 3. CATHODE	STYLE 28: PIN 1. ANODE 2. ANODE 3. ANODE			

DOCUMENT NUMBER:	98ASB42226B	Electronic versions are uncontrolled except when accessed directly from the Document Repos Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-23 (TO-236) 2.90x1.3	SOT-23 (TO-236) 2.90x1.30x1.00 1.90P	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.








SC-70 (SOT-323) CASE 419 ISSUE R


**DATE 11 OCT 2022** 

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1982.
- 2. CONTROLLING DIMENSION: INCH

	MILLIMETERS				INCHES	
DIM	MIN.	N□M.	MAX.	MIN.	N□M.	MAX.
Α	0.80	0.90	1.00	0.032	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A2		0.70 REF			0.028 BS	C
b	0.30	0.35	0.40	0.012	0.014	0.016
С	0.10	0.18	0.25	0.004	0.007	0.010
D	1.80	2.00	2.20	0.071	0.080	0.087
E	1.15	1.24	1.35	0.045	0.049	0.053
е	1.20	1.30	1.40	0.047	0.051	0.055
e1	0.65 BSC			0.026 BS	C	
L	0.20	0.38	0.56	0.008	0.015	0.022
HE	2.00	2.10	2.40	0.079	0.083	0.095



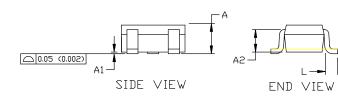

# GENERIC MARKING DIAGRAM




XX = Specific Device Code

M = Date Code

■ = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.



For additional information on our Pb-Free strategy and soldering details, please download the IIN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.


SOLDERING FOOTPRINT

STYLE 1: CANCELLED	STYLE 2: PIN 1. ANODE 2. N.C. 3. CATHODE	STYLE 3: PIN 1. BASE 2. EMITTER 3. COLLECTOR	STYLE 4: PIN 1. CATHODE 2. CATHODE 3. ANODE	STYLE 5: PIN 1. ANODE 2. ANODE 3. CATHODE	
STYLE 6:	STYLE 7:	STYLE 8:	STYLE 9:	STYLE 10:	STYLE 11:
PIN 1. EMITTER	PIN 1. BASE	PIN 1. GATE	PIN 1. ANODE	PIN 1. CATHODE	PIN 1. CATHODE
2. BASE	2. EMITTER	2. SOURCE	2. CATHODE	2. ANODE	<ol><li>CATHODE</li></ol>
<ol><li>COLLECTOR</li></ol>	<ol><li>COLLECTOR</li></ol>	3. DRAIN	<ol><li>CATHODE-ANODE</li></ol>	3. ANODE-CATHODE	<ol><li>CATHODE</li></ol>

DOCUMENT NUMBER:	98ASB42819B Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SC-70 (SOT-323)		PAGE 1 OF 1

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.



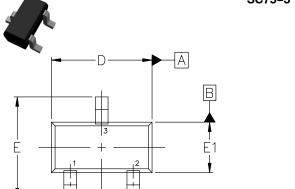

3X b

 $\oplus$  0.20 M C A B

#### SC75-3 1.60x0.80x0.80, 1.00P

**CASE 463 ISSUE H** 


**DATE 01 FEB 2024** 


## NOTES:

- DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5-2018.
- ALL DIMENSION ARE IN MILLIMETERS.

DIM	MILLIMETERS			
	MIN.	NOM.	MAX.	
А	0.70	0.80	0.90	
A1	0.00	0.05	0.10	
A2	0.80 REF.			
b	0.15	0.20	0.30	
С	0.10	0.15	0.25	
D	1.55	1.60	1.65	
E	1.50	1.60	1.70	
E1	0.70	0.80	0.90	
е	1.00 BSC			
L	0.10	0.15	0.20	

TOP VIEW





END VIEW

SIDE VIEW

# **GENERIC MARKING DIAGRAM\***



XX= Specific Device Code М

= Date Code

= Pb-Free Package


\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may

not follow the Generic Marking. STYLE 1: PIN 1. BASE 2. EMITTER STYLE 2: PIN 1. ANODE 2. N/C

3. COLLECTOR

3. CATHODE

STYLE 4: STYLE 5: PIN 1. CATHODE 2. CATHODE PIN 1. GATE 2. SOURCE 3. ANODE 3. DRAIN



## RECOMMENDED MOUNTING FOOTPRINT\*

FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

DOOL	INACAIT	ALLINAD	ED.
DUG	JMENT	NUMB	EK:

98ASB15184C

STYLE 3: PIN 1. ANODE 2. ANODE

3. CATHODE

Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

**DESCRIPTION:** SC75-3 1.60x0.80x0.80, 1.00P PAGE 1 OF 1

onsemi and ONSEMi, are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.







## SOT-1123 0.80x0.60x0.37, 0.35P CASE 524AA ISSUE D

**DATE 18 JAN 2024** 

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
- 2. CONTROLLING DIMENSION: MILLIMETERS.
- 3, MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH.
  MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS
  OF BASE MATERIAL.
- DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.







# RECOMMENDED MOUNTING FOOTPRINT

\*For additional information on our Pb-Free strategy and soldering details, please download th e □N Semiconductor Soldering and Mounting Techniques Reference manual, S□LDERRM/D.

# D A B

TOP VIEW



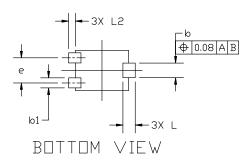

# GENERIC MARKING DIAGRAM\*



X = Specific Device Code

M = Date Code

<sup>\*</sup>This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1:	STYLE
PIN 1. BASE	PIN
2. EMITTER	
<ol><li>COLLECTOR</li></ol>	:

STYLE 2: PIN 1. ANODE 2. N/C 3. CATHODE STYLE 3: PIN 1. ANODE 2. ANODE 3. CATHODE

STYLE 4: PIN 1. CATHODE 2. CATHODE 3. ANODE STYLE 5: PIN 1. GATE 2. SOURCE

DOCUMENT NUMBER:	98AON23134D	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-1123 0.80x0.60x0.37, 0.35P		PAGE 1 OF 1

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.



MILLIMETERS

 $N\square M$ .

0.50



## SOT-723 1.20x0.80x0.50, 0.40P CASE 631AA ISSUE E


**DATE 24 JAN 2024** 


MAX.


0.55

#### NOTES:


- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018. CONTROLLING DIMENSION: MILLIMETERS.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.







b	0.15	0.21	0.27
b1	0.25	0.31	0.37
С	0.07	0.12	0.17
D	1.15	1.20	1.25
Е	0.75	0.80	0.85
е	0.40 BSC		
Н	1.15	1.20	1.25
L	0.29 REF		
L2	0.15	0.20	0.25
0.27			



DIM

Α

MIN.

0.45

# RECOMMENDED MOUNTING FUUTPRINT

\*For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.

## **GENERIC MARKING DIAGRAM\***



XX = Specific Device Code = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "=", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1:	STYLE 2:	STYLE 3:	STYLE 4:	STYLE 5:
PIN 1. BASE	PIN 1. ANODE	PIN 1. ANODE	PIN 1. CATHODE	PIN 1. GATE
<ol><li>EMITTER</li></ol>	2. N/C	2. ANODE	2. CATHODE	<ol><li>SOURCE</li></ol>
<ol><li>COLLECTOR</li></ol>	<ol><li>CATHODE</li></ol>	<ol><li>CATHODE</li></ol>	<ol><li>ANODE</li></ol>	<ol><li>DRAIN</li></ol>

DOCUMENT NUMBER:	98AON12989D	Electronic versions are uncontrolled except when accessed directly from the Document Repos Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-723 1.20x0.80x0.50, 0.40P		PAGE 1 OF 1

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales