

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild guestions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



November 2013

FDD850N10LD

BoostPak (N-Channel PowerTrench[®] MOSFET + Diode) 100 V, 15.3 A, 75 m Ω

Features

- $R_{DS(on)}$ = 61 m Ω (Typ.) @ V_{GS} = 10 V, I_D = 12 A
- $R_{DS(on)} = 64 \text{ m}\Omega \text{ (Typ.)} @ V_{GS} = 5.0 \text{ V}, I_D = 12 \text{ A}$
- Low Gate Charge (Typ. 22.2 nC)
- Low C_{rss} (Typ. 42 pF)
- · Fast Switching
- · 100% Avalanche Tested
- · Improved dv/dt Capability
- · RoHS Compliant

Description

This N-Channel MOSFET is produced using Fairchild Semiconductor's PowerTrench® process that has been tailored to minimize the on-state resistance while maintaining superior switching performance.


The NP diode is hyperfast rectifier with low forward voltage drop and excellent switching performance.

Applications

- · LED Monitor Backlight
- · LED TV Backlight
- · LED Lighting
- Consumer Appliances, DC-DC converter (Step up & Step down)



- 1. Gate
- 2. Source
- 3. Drain / Anode
- 4. Cathode
- 5. Cathode



Maximum Ratings $T_C = 25^{\circ}C$ unless otherwise noted.

Symbol		Parameter			Unit
V_{DSS}	Drain to Source Voltage	Drain to Source Voltage			V
V_{GSS}	Gate to Source Voltage			±20	V
	Drain Current	- Continuous (T _C = 25°C)		15.3	А
ID	Diain Current	- Continuous (T _C = 100°C)		9.7	^
I _{DM}	Drain Current	- Pulsed	(Note 1)	46	Α
E _{AS}	Single Pulsed Avalanche Energy (Note 2)		(Note 2)	41	mJ
dv/dt	Peak Diode Recovery of	lv/dt	(Note 3)	6.0	V/ns
В	Power Dissipation	$(T_C = 25^{\circ}C)$		42	W
P_{D}	Power Dissipation	- Derate Above 25°C		0.33	W/°C
I _F (AV)	Diode Average Rectifie	d Forward Current (T _C = 138°C)		5	Α
I _{FSM}	Diode Non-repetitive Peak Surge Current 60 Hz Single Half-Sine Wave			50	Α
T _J , T _{STG}	Operating and Storage Temperature Range			-55 to +150	°C
T _L	Maximum Lead Temper	ature for Soldering, 1/8" from Case for	5 Seconds	300	°C

Thermal Characteristics

Symbol	Parameter	FDD850N10LD	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case for MOSFET, Max.	3.0	
$R_{\theta JC}$	Thermal Resistance, Junction to Case for Diode, Max. 2.5		°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient, Max.	87	

Package Marking and Ordering Information

Part Number	Top Mark	Package	Packing Method	Reel Size	Tape Width	Quantity
FDD850N10LD	850N10LD	TO-252 5L	Tape and Reel	13"	16 mm	2500 units

Electrical Characteristics of the MOSFET $T_C = 25^{\circ}$ C unless otherwise noted.

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
Off Charac	cteristics					
BV _{DSS}	Drain to Source Breakdown Voltage	$I_D = 250 \mu A, V_{GS} = 0 V$	100	-	-	V
ΔBV _{DSS} / ΔT _J	Breakdown Voltage Temperature Coefficient	I_D = 250 μA, Referenced to 25°C	-	0.1	-	V/°C
	Zero Gate Voltage Drain Current	V _{DS} = 80 V, V _{GS} = 0 V	-	-	1	
I _{DSS} Zero G	Zero Gate voltage Drain Current	$V_{DS} = 80 \text{ V}, T_{C} = 125^{\circ}\text{C}$	-	-	500	μΑ
I _{GSS}	Gate to Body Leakage Current	V _{GS} = ±20 V, V _{DS} = 0 V	-	-	±100	nA

On Characteristics

V _{GS(th)}	Gate Threshold Voltage	$V_{GS} = V_{DS}, I_{D} = 250 \mu\text{A}$	1.0	-	2.5	V
D	Static Drain to Source On Resistance	$V_{GS} = 10 \text{ V}, I_D = 12 \text{ A}$	-	61	75	mΩ
R _{DS(on)} Static Drain to Source On Resistance	Static Drain to Source On Resistance	V _{GS} = 5 V, I _D =12 A	-	64	96	11152
9 _{FS}	Forward Transconductance	V _{DS} = 10 V, I _D = 15.3 A	-	31	-	S

Dynamic Characteristics

C _{iss}	Input Capacitance		V 05.V.V 0.V	-	1100	1465	pF
C _{oss}	Output Capacitance		$V_{DS} = 25 \text{ V}, V_{GS} = 0 \text{ V},$ f = 1 MHz	-	80	105	pF
C _{rss}	Reverse Transfer Capacitance	I - 1 WITZ		-	42	-	pF
Q _{g(tot)}	Total Gate Charge at 10V			-	22.2	28.9	nC
Q _{g(tot)}	Total Gate Charge at 5V		V _{DS} = 80 V, I _D = 15.3 A		12.3	16.0	nC
Q_{gs}	Gate to Source Gate Charge		20	-	3.0	-	nC
Q_{gd}	Gate to Drain "Miller" Charge		(Note	-	5.7	-	nC
ESR	Equivalent Series Resistance (G-S)		f = 1 MHz	-	1.75	-	Ω

Switching Characteristics

t _{d(on)}	Turn-On Delay Time		-	17	44	ns
t _r		$V_{DD} = 50 \text{ V}, I_{D} = 15.3 \text{ A},$	-/	21	52	ns
t _{d(off)}	Turn-Off Delay Time	V_{GS} = 5 V, R_G = 4.7 Ω	-	27	64	ns
t _f	Turn-Off Fall Time	(Note 4)	/-	8	26	ns

Drain-Source Diode Characteristics

I _S	Maximum Continuous Drain to Source Diode Forward Current		-	-	15.3	Α
I _{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	46	Α
V_{SD}	Drain to Source Diode Forward Voltage	V _{GS} = 0 V, I _{SD} = 12 A	-	-	1.3	V
t _{rr}	Reverse Recovery Time	V _{GS} = 0 V, I _{SD} = 15.3 A, V _{DS} = 80 V,	-	38	-	ns
Q _{rr}	Reverse Recovery Charge	dI _F /dt = 100 A/μs	-	50	-	nC

Notes:

- 1. Repetitive rating: pulse-width limited by maximum junction temperature.
- 2. L = 1 mH, I $_{AS}$ = 9.1 A, R $_{G}$ = 25 Ω , starting T $_{J}$ = 25°C.
- 3. I_{SD} \leq 15.3 A, di/dt \leq 200 A/ μ s, V_{DD} \leq BV_{DSS}, starting T_J = 25°C.
- 4. Essentially independent of operating temperature typical characteristics.

Electrical Characteristics of the Diode $T_C = 25^{\circ}C$ unless otherwise noted.

Symbol	Parameter	Test Con	Test Conditions		Тур.	Max.	Unit
V_R	DC Blocking Voltage	I _R = 250 μA		150	-	-	V
V	Maximum Instantaneous Forward Voltage	I _F = 5 A	T _C = 25°C	-	-	2.5	V
V_{FM}	rFM Iviaximum instantaneous i orward voltage	IF - 5 A	$T_{\rm C} = 125^{\rm o}{\rm C}$	-	0.9	-	V
	Maximum Instantaneous Reverse Current	2) rated VD	T _C = 25°C	-	-	50	
I _{RM}	IMAXIMUM INSTANTANEOUS Reverse Current (a		$T_{\rm C} = 125^{\rm o}{\rm C}$	-	-	1000	uA
	Diode Reverse Recovery Time		T _C = 25°C	-	10.7	22	ns
'rr	Diode Reverse Recovery Time		$T_{\rm C} = 125^{\rm o}{\rm C}$	-	14.5	-	115
1	Diode Peak Reverse Recovery Current	I _F = 5 A, dI/dt = 200 A/μs	$T_{\rm C} = 25^{\rm o}{\rm C}$	-	2.2	5	Α
'rr	Diode Feak Reverse Recovery Current	ui/ut - 200 A/μs	$T_{\rm C} = 125^{\rm o}{\rm C}$	-	3.4	-	^
0	Diada Davarra Dasavary Charra		$T_{\rm C} = 25^{\rm o}{\rm C}$	-	11.7	-	nC
Q _{rr}	Diode Reverse Recovery Charge		$T_{\rm C} = 125^{\rm o}{\rm C}$	-	24.7	-	110
W _{AVL}	Avalanche Energy (L = 40 mH)			10	-	-	mJ

Typical Performance Characteristics - MOSFET

Figure 1. On-Region Characteristics

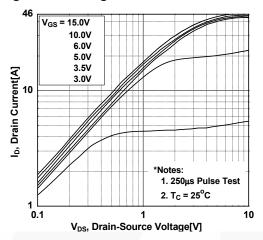


Figure 3. On-Resistance Variation vs.

Drain Current and Gate Voltage

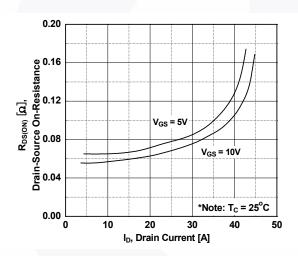


Figure 5. Capacitance Characteristics

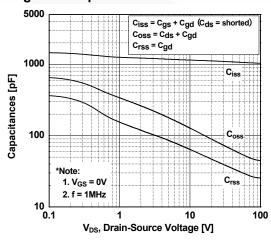


Figure 2. Transfer Characteristics

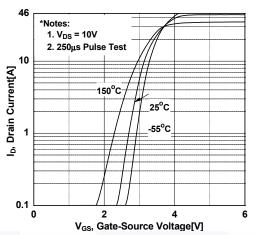


Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature


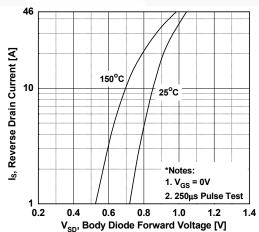


Figure 6. Gate Charge Characteristics

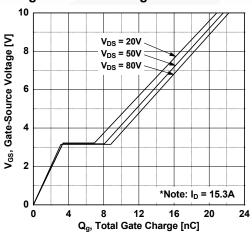

Typical Performance Characteristics - MOSFET (Continued)

Figure 7. Breakdown Voltage Variation vs. Temperature

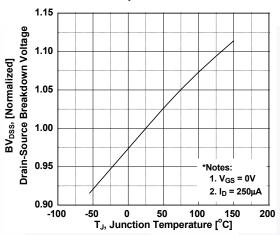


Figure 9. Maximum Safe Operating Area

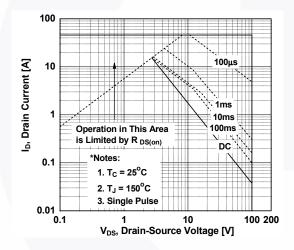


Figure 8. On-Resistance Variation vs. Temperature


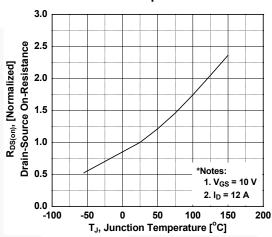


Figure 10. Maximum Drain Current vs. Case Temperature

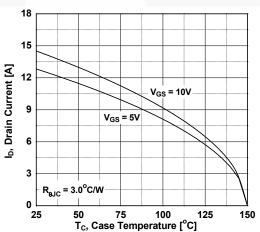

Typical Performance Characteristics - Diode (Continued)

Figure 11. Diode Forward Voltage Drop vs. Forward Current

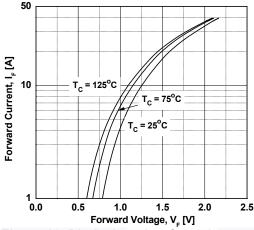


Figure 13. Diode Junction Capacitance

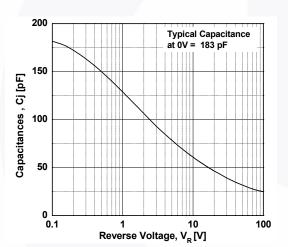


Figure 15. Diode Reverse Recovery Current vs. di/dt

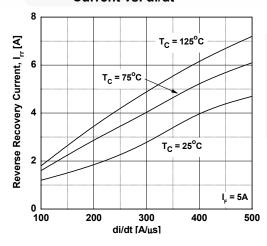


Figure 12. Diode Reverse Current vs. Reverse Voltage

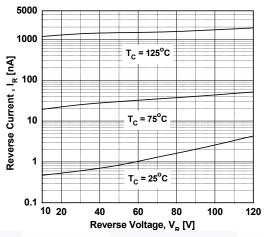


Figure 14. Diode Reverse Recovery Time vs. di/dt


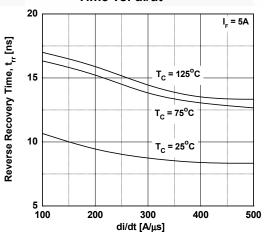


Figure 16. Diode Forward Current Derating Curve

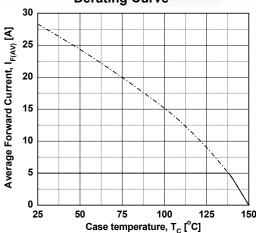

Typical Performance Characteristics (Continued)

Figure 17. Transient Thermal Response Curve of MOSFET

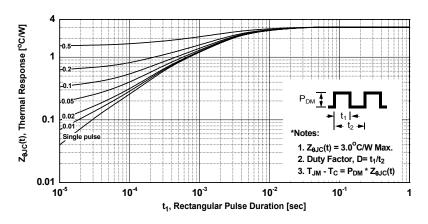
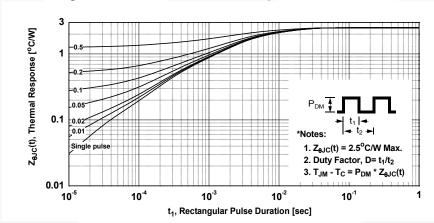


Figure 18. Transient Thermal Response Curve of Diode



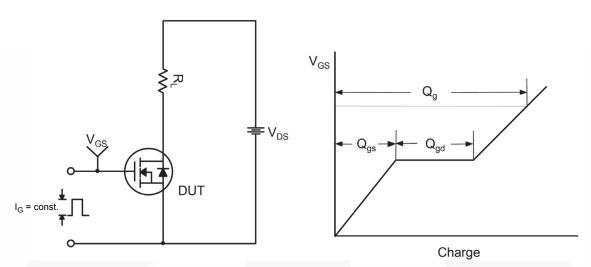


Figure 19. Gate Charge Test Circuit & Waveform

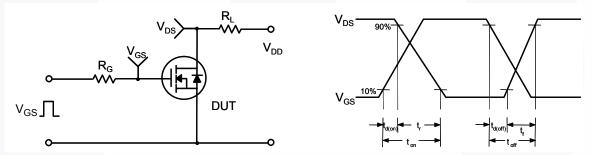


Figure 20. Resistive Switching Test Circuit & Waveforms

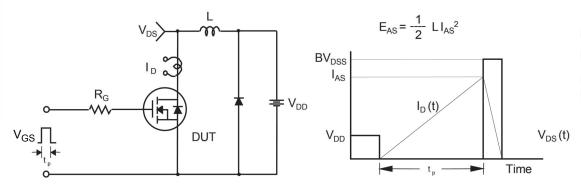


Figure 21. Unclamped Inductive Switching Test Circuit & Waveforms

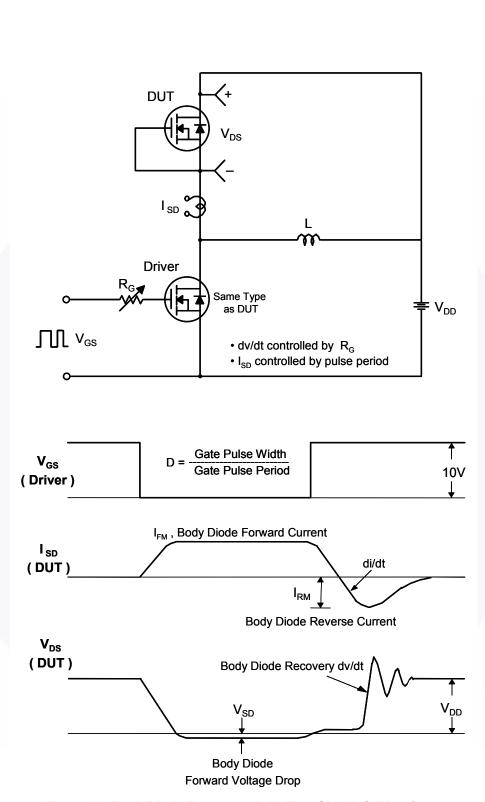


Figure 22. Peak Diode Recovery dv/dt Test Circuit & Waveforms

Mechanical Dimensions

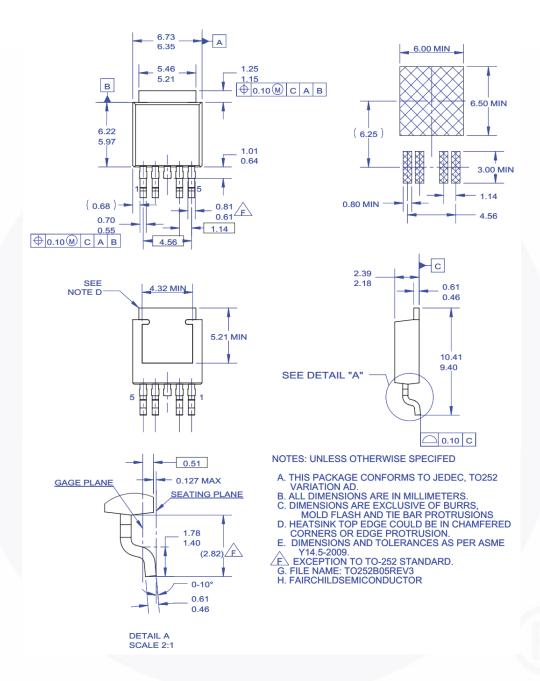


Figure 23. TO252 (D-PAK), Molded, 5-Lead, Option AD

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/package/packageDetails.html?id=PN_TT252-005





TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™ AX-CAP® BitSiC™ Build it Now™ CorePLUS™ CorePOWER™ $CROSSVOLT^{\text{TM}}$

CTI ™ Current Transfer Logic™ DEUXPEED® Dual Cool™

EcoSPARK® EfficentMax™ ESBC™

Fairchild[®] Fairchild Semiconductor® FACT Quiet Series™

FACT® FAST® FastvCore™ FETBench™ FPS™

FRFET® Global Power ResourceSM

GreenBridge™ Green FPS™ Green FPS™ e-Series™

G*max*™ GTO™ IntelliMAX™ ISOPLANAR™

F-PFS™

Marking Small Speakers Sound Louder

and Better™ MegaBuck™ MICROCOUPLER™ MicroFET™ MicroPak™ MicroPak2™ MillerDrive™

MotionMax™ mWSaver® OptoHiT™ OPTOLOGIC® OPTOPLANAR® PowerTrench® PowerXS™

Programmable Active Droop™

QFET QS™ Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™ SignalWise™

SmartMax™ SMART START™

Solutions for Your Success™

STEALTH™

SuperFET® SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS® SvncFET™

SYSTEM ®* TinyBoost[®] TinyBuck[®] TinyCalc™ TinyLogic[®] TINYOPTO™ TinvPower™ TinyPWM™ TinyWire™

Sync-Lock™

TranSiC™ TriFault Detect™ TRUECURRENT®* uSerDes™

UHC[®] Ultra FRFET™ UniFFT™ VCX™ VisualMax™ VoltagePlus™ XS™

*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY
FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE
EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information Formative / In Design		Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev 166

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and h

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative