

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild guestions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



March 2016

FQB34P10

P-Channel QFET® MOSFET


100 V, -33.5 A, 60 m Ω


Description

This P-Channel enhancement mode power MOSFET is produced using Fairchild Semiconductor's proprietary planar stripe and DMOS technology. This advanced MOSFET technology has been especially tailored to reduce on-state resistance, and to provide superior switching performance and high avalanche energy strength. These devices are suitable for switched mode power supplies, audio amplifier, DC motor control, and variable switching power applications.

Features

- This P-Channel enhancement mode power MOSFET is produced using Fairchild Semiconductor's proprietary planar $I_D = -16.75 \text{ A}$ A $I_D = -16.75 \text{ A}$
 - Low Gate Charge (Typ. 85 nC)
 - Low Crss (Typ. 170 pF)
 - 100% Avalanche Tested
 - · 175°C Maximum Junction Temperature Rating





Absolute Maximum Ratings T_C = 25°C unless otherwise noted.

Symbol	Parameter	/-	FQB34P10TM	Unit
V_{DSS}	Drain-Source Voltage		-100	V
I _D	Drain Current - Continuous (T _C = 25°C)		-33.5	Α
	- Continuous (T _C = 100°C)		-23.5	Α
I _{DM}	Drain Current - Pulsed	(Note 1)	-134	Α
V _{GSS}	Gate-Source Voltage		± 25	V
E _{AS}	Single Pulsed Avalanche Energy (Note 2)		2200	mJ
I _{AR}	Avalanche Current	(Note 1)	-33.5	Α
E _{AR}	Repetitive Avalanche Energy	(Note 1)	15.5	mJ
dv/dt	Peak Diode Recovery dv/dt (Note 3)		-6.0	V/ns
P _D	Power Dissipation (T _A = 25°C) *		3.75	W
	Power Dissipation (T _C = 25°C)		155	W
	- Derate above 25°C		1.03	W/°C
T _J , T _{STG}	Operating and Storage Temperature Range		-55 to +175	°C
T _L	Maximum lead temperature for soldering, 1/8" from case for 5 seconds		300	°C

Thermal Characteristics

Symbol	Parameter	FQB34P10TM	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case, Max.	0.97	
D	Thermal Resistance, Junction to Ambient (Minimum Pad of 2-oz Copper), Max.	62.5	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (*1 in ² Pad of 2-oz Copper), Max.	40	

Package Marking and Ordering Information

Part Number	Top Mark	Package	Packing Method	Reel Size	Tape Width	Quantity
FQB34P10TM	FQB34P10	D ² -PAK	Tape and Reel	330 mm	24 mm	800 units

Electrical Characteristics

T_C = 25°C unless otherwise noted.

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Uni
Off Cha	aracteristics					
BV _{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = -250 \mu\text{A}$	-100			V
ΔBV _{DSS} / ΔT _J	Breakdown Voltage Temperature Coefficient	I_D = -250 μA, Referenced to 25°C		-0.1		V/°(
I _{DSS}	Zana Cata Valtana Duain Courset	V _{DS} = -100 V, V _{GS} = 0 V			-1	μΑ
	Zero Gate Voltage Drain Current	V _{DS} = -80 V, T _C = 150°C			-10	μΑ
I _{GSSF}	Gate-Body Leakage Current, Forward	V _{GS} = -25 V, V _{DS} = 0 V			-100	nA
I _{GSSR}	Gate-Body Leakage Current, Reverse	V _{GS} = 25 V, V _{DS} = 0 V			100	nΑ
On Cha	racteristics					
V _{GS(th)}	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_{D} = -250 \mu\text{A}$	-2.0		-4.0	V
R _{DS(on)}	Static Drain-Source On-Resistance	V _{GS} = -10 V, I _D = -16.75 A		0.049	0.06	Ω
9 _{FS}	Forward Transconductance	V _{DS} = -40 V, I _D = -16.75 A		23		S
Dynam	ic Characteristics					
C _{iss}	Input Capacitance	V _{DS} = -25 V, V _{GS} = 0 V,	\	2240	2910	pF
C _{oss}	Output Capacitance	f = 1.0 MHz		730	950	рF
C _{rss}	Reverse Transfer Capacitance			170	220	pF
Switchi	ing Characteristics					
t _{d(on)}	Turn-On Delay Time	V _{DD} = -50 V, I _D = -33.5 A,		25	60	ns
t _r	Turn-On Rise Time	$R_G = 25 \Omega$		250	510	ns
t _{d(off)}	Turn-Off Delay Time	9		160	330	ns
t _f	Turn-Off Fall Time	(Note 4)		210	430	ns
Qg	Total Gate Charge	V _{DS} = -80 V, I _D = -33.5 A,		85	110	nC
Q _{gs}	Gate-Source Charge	V _{GS} = -10 V		15		nC
Q _{gd}	Gate-Drain Charge	(Note 4)	/	45		nC
Drain-S	Source Diode Characteristics a	nd Maximum Ratings				
I _S	Maximum Continuous Drain-Source Diode Forward Current				-33.5	Α
I _{SM}	Maximum Pulsed Drain-Source Diode Forward Current				-134	Α
V _{SD}	Drain-Source Diode Forward Voltage	$V_{GS} = 0 \text{ V}, I_{S} = -33.5 \text{ A}$			-4.0	V
t _{rr}	Reverse Recovery Time	V _{GS} = 0 V, I _S = -33.5 A,		160		ns

- 1. Repetitive rating : pulse-width limited by maximum junction temperature.
- 2. L = mH, I_{AS} = -33.5A, V_{DD} = -25 V, R_G = 25 Ω , starting T_J = 25°C. 3. I_{SD} \leq -33.5 A, di/dt \leq 300 A/ μ s , V_{DD} \leq BV_{DSS}, starting T_J = 25°C.
- 4. Essentially independent of operating temperature.

Typical Characteristics





Figure 1. On-Region Characteristics



40

60 80 100 120 140

20

Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage

-I_D, Drain Current [A]

160




Figure 5. Capacitance Characteristics




Figure 2. Transfer Characteristics




Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature




Figure 6. Gate Charge Characteristics

Typical Characteristics (Continued)

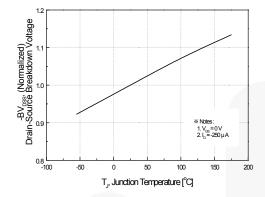


Figure 7. Breakdown Voltage Variation vs. Temperature




Figure 8. On-Resistance Variation vs. Temperature




Figure 9. Maximum Safe Operating Area




Figure 10. Maximum Drain Current vs. Case Temperature

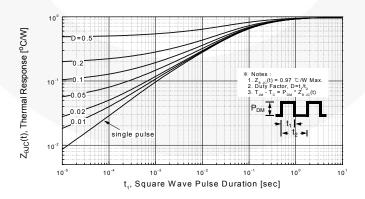


Figure 11. Transient Thermal Response Curve

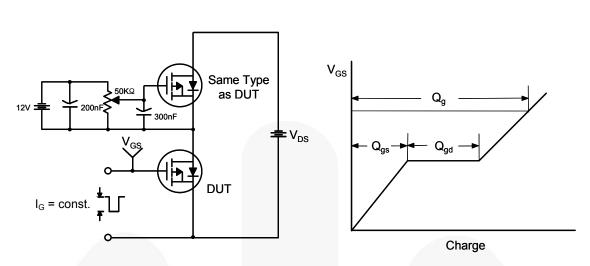


Figure 12. Gate Charge Test Circuit & Waveform

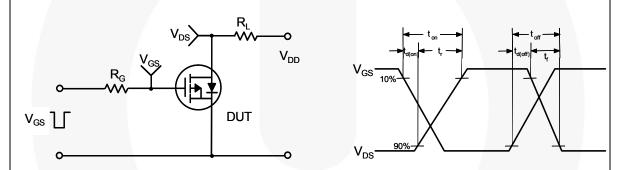


Figure 13. Resistive Switching Test Circuit & Waveforms



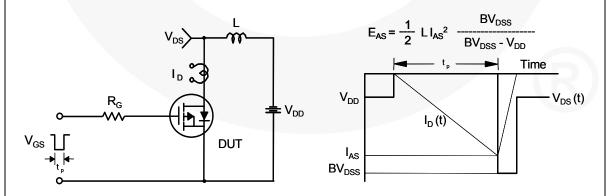


Figure 14. Unclamped Inductive Switching Test Circuit & Waveforms





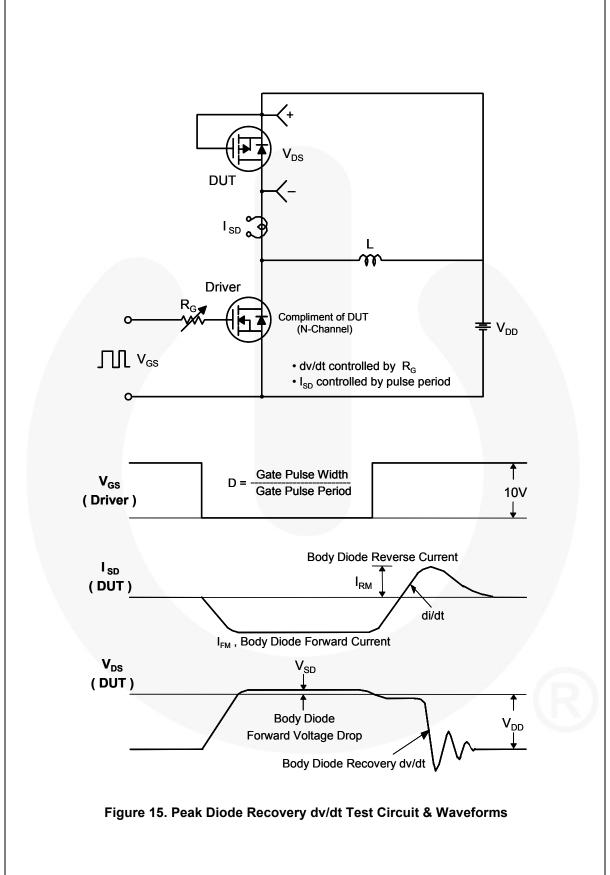

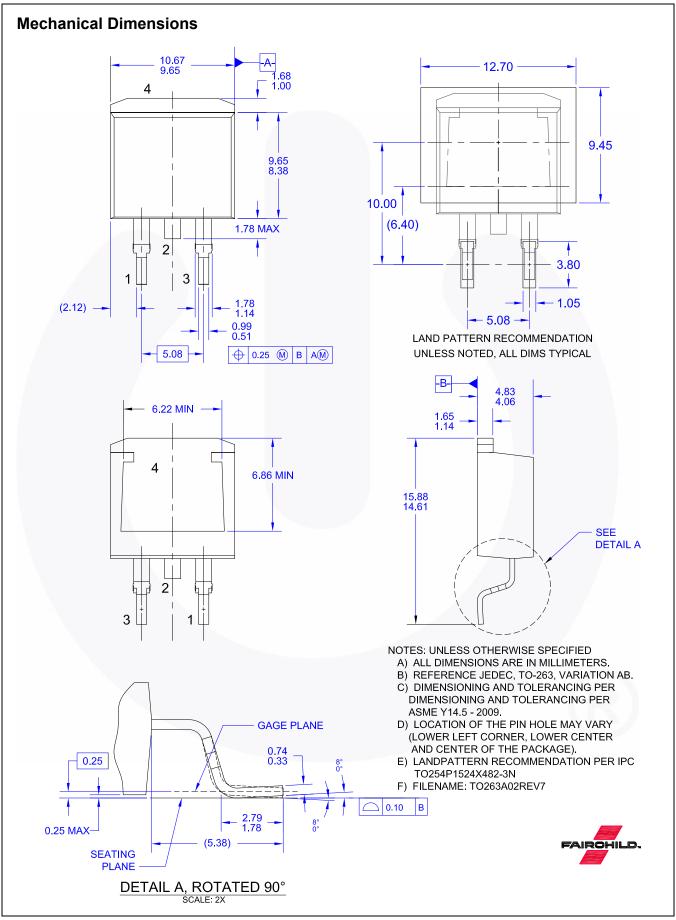

TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

 $(1)_{\mathbb{R}}$

AccuPower™
AttitudeEngine™
Awinda®
AX-CAP®*
BitSiC™
Build it Now™
CorePLUS™

Build it NowTM
CorePLUSTM
CorePOWERTM
CROSSVOLTTM
CTLTM
Current Transfer LogicTM

Current Transfer Logic
DEUXPEED®
Dual CoolTM
EcoSPARK®
EfficentMaxTM
ESBCTM

Fairchild®

Fairchild Semiconductor[®]
FACT Quiet Series™

FACT Quiet Series
FACT®
FastvCoreTM
FETBenchTM
FPSTM

F-PFS™ FRFET®

Global Power ResourceSM

GreenBridge™
Green FPS™
Green FPS™ e-Series™

Gmax[™] GTO[™] IntelliMAX[™] ISOPLANAR[™]

Marking Small Speakers Sound Louder

and Better™
MegaBuck™
MICROCOUPLER™
MicroFET™
MicroPak™
MicroPak2™
MillerDrive™
MotionMax™
MotionGrid®
MTI®

MTr®
MTx®
MVN®
mWSaver®
OptoHiTTM
OPTOLOGIC®

OPTOPLANAR®

Power Supply WebDesigner™

PowerTrench[®] PowerXS™

Programmable Active Droop™ QFET®

QS™ Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™

SignalWise™ SmartMax™ SMART START™

Solutions for Your Success $^{\text{TM}}$ SPM $^{\text{\tiny{\'e}}}$

SPM®
STEALTH™
SuperFET®
SuperSOT™-3
SuperSOT™-6
SuperSOT™-8
SupreMOS®
SyncFET™
Sync-Lock™

SYSTEM ®*
GENERAL
TinyBoost®
TinyBoost®
TinyCalc™
TinyLogic®
TINYOPTO™
TinyPOWer™
TinyPWM™
TinyPWM™
TranSiC™
TriFault Detect™
TRUECURRENT®*
µSerDes™

SerDes*
UHC®
Ultra FRFET™
UniFET™
VCX™
VisualMax™
VoltagePlus™
XS™
Xsens™
M童®

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT http://www.fairchildsemi.com. Fairchild does not assume any Liability Arising out of the application or use of any product or circuit described Herein; Neither does it convey any License under its patent rights, nor the rights of others. These specifications do not expand the terms of fairchild's worldwide terms and conditions, specifically the warranty therein, which covers these products.

AUTHORIZED USE

Unless otherwise specified in this data sheet, this product is a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability. This product may not be used in the following applications, unless specifically approved in writing by a Fairchild officer: (1) automotive or other transportation, (2) military/aerospace, (3) any safety critical application – including life critical medical equipment – where the failure of the Fairchild product reasonably would be expected to result in personal injury, death or property damage. Customer's use of this product is subject to agreement of this Authorized Use policy. In the event of an unauthorized use of Fairchild's product, Fairchild accepts no liability in the event of product failure. In other respects, this product shall be subject to Fairchild's Worldwide Terms and Conditions of Sale, unless a separate agreement has been signed by both Parties.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Terms of Use

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification Product Status		Definition		
Advance Information Formative / In Design		Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary First Production		Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.		
No Identification Needed Full Production		Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.		
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.		

Rev. 177

^{*}Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdt/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative