# Onsemi

## **NPN Epitaxial Silicon** Transistor

## **KSD5041**

#### Features

- AF Output Amplifier for Electronic Flash Unit
- Low Collector-Emitter Saturation Voltage
- High Performance at Low Supply Voltage
- These are Pb-Free Devices

#### **ABSOLUTE MAXIMUM RATINGS**

(T<sub>A</sub> = 25°C unless otherwise noted.)

Symbol	Parameter	Value	Unit
V <sub>CBO</sub>	Collector-Base Voltage	40	V
V <sub>CEO</sub>	Collector-Emitter Voltage	20	V
V <sub>EBO</sub>	Emitter-Base Voltage	7	V
Ι <sub>C</sub>	Collector Current	5	А
TJ	T <sub>J</sub> Junction Temperature		°C
T <sub>STG</sub>	T <sub>STG</sub> Storage Temperature		°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### **THERMAL CHARACTERISTICS**

(T<sub>A</sub> = 25°C unless otherwise noted.) (Note 1)


Symbol	Parameter	Value	Unit	
PD	P <sub>D</sub> Power Dissipation		W	
	Derate Above 25°C	6.0	mW/°C	
R <sub>θJA</sub>	Thermal Resistance, Junction-to-Ambient	166.6	°C/W	

1. PCB size: FR-4, 76 mm  $\times$  114 mm  $\times$  1.57 mm (3.0 inch  $\times$  4.5 inch  $\times$  0.062 inch) with minimum land pattern size.


#### ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
BV <sub>CEO</sub>	Collector-Emitter Breakdown Voltage	I <sub>C</sub> = 1 mA, I <sub>B</sub> = 0	20	-	-	V
$BV_{EBO}$	Emitter-Base Breakdown Voltage	$I_{E} = 10 \ \mu A, \ I_{C} = 0$	7	-	-	V
I <sub>CBO</sub>	Collector Cut-Off Current	$V_{CB} = 10 \text{ V}, I_E = 0$	-	-	0.1	μA
I <sub>EBO</sub>	Emitter Cut-Off Current	$V_{EB} = 7 V, I_{C} = 0$	-	-	0.1	μA
h <sub>FE1</sub>	DC Current Gain	$V_{CE} = 2 V, I_{C} = 0.5 A$	340	-	600	
h <sub>FE2</sub>		$V_{CE} = 2 V, I_{C} = 2 A$	150	-	-	
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage	$I_{\rm C} = 3 \text{ A}, I_{\rm B} = 0.1 \text{ A}$	-	-	1	V
f <sub>T</sub>	Current Gain Bandwidth Product	$V_{CE} = 6 V, I_{C} = 50 mA$	-	150	-	MHz
C <sub>ob</sub>	Output Capacitance	$V_{CB} = 20 \text{ V}, I_E = 0, f = 1 \text{ MHz}$	-	-	50	pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.



**MARKING DIAGRAM** 




A D5041 = Device Code YWW = Date Code

#### **ORDERING INFORMATION**

Device	Package	Shipping
KSD5041RTA	TO-92-3LF (Pb-Free)	2000 / Fan–Fold

#### KSD5041

#### **TYPICAL CHARACTERISTICS**

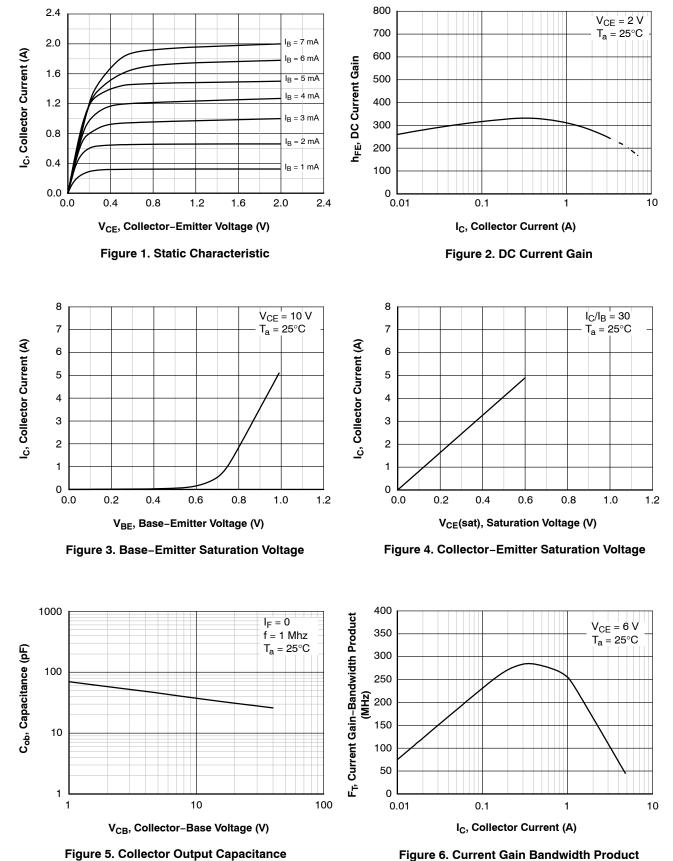



#### KSD5041

### TYPICAL CHARACTERISTICS (Continued)

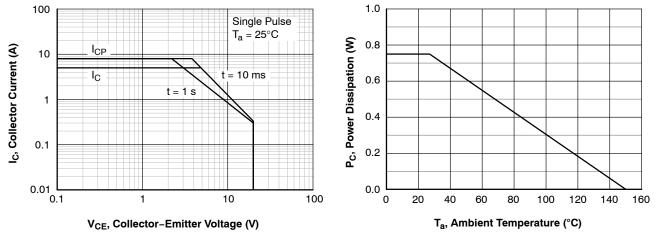



Figure 7. Safe Operating Area


Figure 8. Power Derating



#### TO-92 3 4.83x4.76 LEADFORMED CASE 135AR ISSUE O

DATE 30 SEP 2016

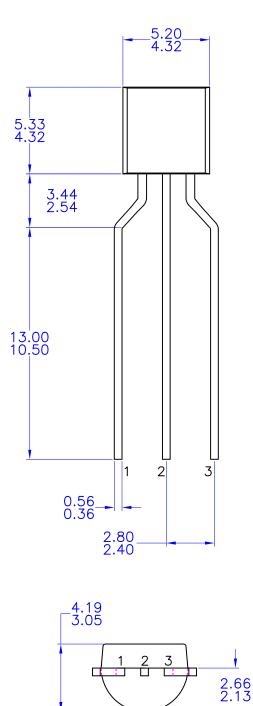

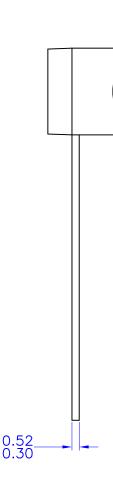

NOTES: UNLESS OTHERWISE SPECIFIED

A) DRAWING WITH REFERENCE TO JEDEC TO-92 RECOMMENDATIONS.

- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DRAWING CONFORMS TO ASME Y14.5M-1994

DOCUMENT NUMBER:	98AON13879G Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	TO-92 3 4.83X4.76 LEADFORMED		PAGE 1 OF 1

onsemi and ONSEMi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

#### ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>