

# NPN Epitaxial Silicon Transistor

# **KSD526**

#### **Features**

- Complement to KSB596
- This is a Pb-Free Device

## **Applications**


• Power Amplifier Applications

## **ABSOLUTE MAXIMUM RATINGS\*** (T<sub>A</sub> = 25°C unless otherwise noted)

Symbol	Parameter	Ratings	Units	
V <sub>CBO</sub>	Collector-Base Voltage	80	V	
V <sub>CEO</sub>	Collector–Emitter Voltage	80	V	
V <sub>EBO</sub>	Emitter-Base Voltage	5	V	
I <sub>C</sub>	Collector Current	4	Α	
I <sub>B</sub>	Base Current	0.4	Α	
P <sub>C</sub>	Collector Dissipation (T <sub>C</sub> = 25°C)	30	W	
TJ	Junction Temperature	150	°C	
T <sub>STG</sub>	Storage Temperature	-55 ~ 150	°C .	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


1



- 1. Base
- 2. Collector
- 3. Emitter

TO-220-3LD CASE 340AT

#### **MARKING DIAGRAM**



3

= Date Code

&K D526-Y Lot Traceability CodeSpecific Device Code

# ORDERING INFORMATION

Device	Package	Shipping
KSD526Y	TO-220-3LD (Pb-Free)	1200 Units / Bulk Bag
KSD526YTU	TO-220-3LD (Pb-Free)	1000 Units / Tube

<sup>\*</sup>These ratings are limiting values above which the serviceability of any semiconductor device may by impaired.

#### **KSD526**

## **ELECTRICAL CHARACTERISTICS** (T<sub>C</sub> = 25°C unless otherwise noted)

Symbol	Characteristic	Test Condition	Min	Тур	Max	Unit
I <sub>CBO</sub>	Collector Cut-off Current	V <sub>CB</sub> = 80 V, I <sub>E</sub> = 0			30	μΑ
I <sub>EBO</sub>	Emitter Cut-off Current	$V_{EB} = 5 \text{ V}, I_{C} = 0$			100	μΑ
BV <sub>CEO</sub>	Collector-Emitter Breakdown Voltage	$I_C = 50 \text{ mA}, I_B = 0$	80			V
BV <sub>EBO</sub>	Emitter-Base Breakdown Voltage	$I_E = 10 \text{ mA}, I_C = 0$	5			V
h <sub>FE</sub>	DC Current Gain	$V_{CE} = 5 \text{ V}, I_{C} = 0.5 \text{ A}$ $V_{CE} = 5 \text{ V}, I_{C} = 3 \text{ A}$	40 15	50	240	
V <sub>CE(sat)</sub>	Collector–Emitter Saturation Voltage	I <sub>C</sub> = 3 A, I <sub>B</sub> = 0.3 A		0.45	1.5	V
V <sub>BE(on)</sub>	Base-Emitter On Voltage	V <sub>CE</sub> = 5 V, I <sub>C</sub> = 3 A		1	1.5	V
f <sub>T</sub>	Current Gain – Bandwidth Product	V <sub>CE</sub> = 5 V, I <sub>C</sub> = 0.5 A	3	8		MHz
C <sub>cb</sub>	Collector Output Capacitance	V <sub>CB</sub> = 10 V, I <sub>E</sub> = 0, f = 1 MHz		90		pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# **h**FE CLASSIFICATION

		0		Y
h <sub>FE</sub>	40 ~ 80	70 ~ 140	NE"	120 ~ 240
THIS DEVICE	E PLEASENTAI REPRESENTAI	MINIENDED FOR INFO	orsemi ORMATIC	

## **KSD526**

#### **TYPICAL CHARACTERISTICS**




Figure 1. Static Characteristic




Figure 2. DC Current Gain




Figure 3. Base-Emitter On Voltage




Figure 4. Collector-Emitter Saturation Voltage




Figure 5. Safe Operating Area






Figure 6. Power Derating





TO-220-3LD CASE 340AT ISSUE B

#### **DATE 08 AUG 2022**

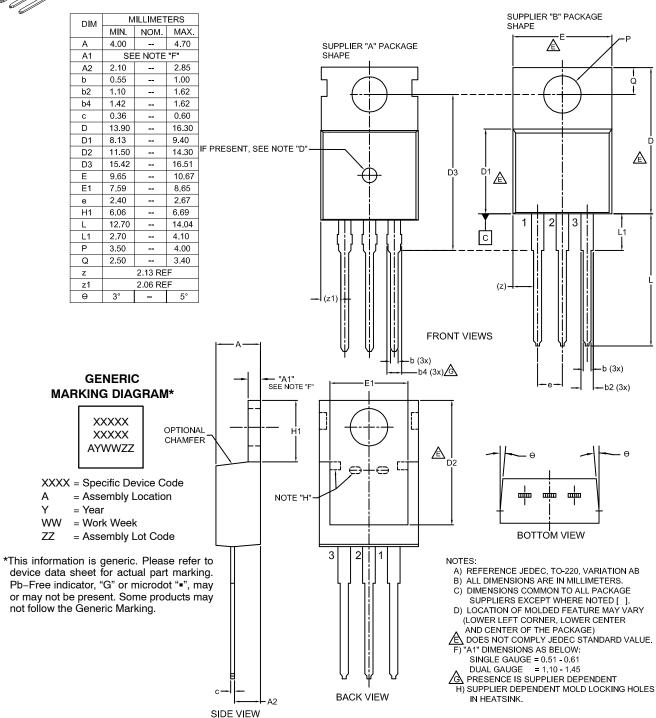

DOCUMENT NUMBER:	98AON13818G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	TO-220-3LD		PAGE 1 OF 1

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales