# **ON Semiconductor**

#### Is Now



To learn more about onsemi™, please visit our website at www.onsemi.com

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application,



Is Now Part of



# **ON Semiconductor®**

# To learn more about CN Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



# LM319 Dual Comparator

#### **Features**


- Operates From a Single 5V Supply
- Typically 80ns Response Time at ±15V
- $\bullet \quad Open \ Collector \ Outputs: up \ to \ +35V$
- High Output Drive Current: 25mA
- Inputs and Outputs can be Isolated From System Ground
- Minimum Fan-Out of 2 (Each Side)
- Two Independent Comparators

# **Description**


The LM319 is a dual high speed voltage comparator designed to operate from a single +5V supply up to ±15V dual supplies. Open collector of the output stage makes the LM319 compatible with RTL, DTL and TTL as well as capable of driving lamps and relays at currents up to 25mA. Typical response time of 80ns with ±15V power supplies makes the LM319 ideal for application in fast A/D converts, level shiftier, oscillators, and multivibrators.



# **Internal Block Diagram**

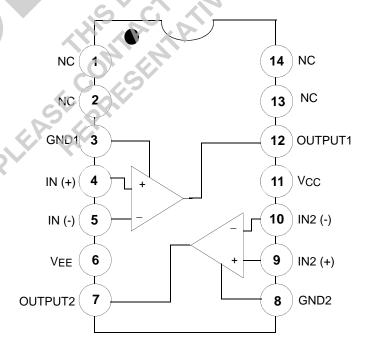

# **Schematic Diagram**

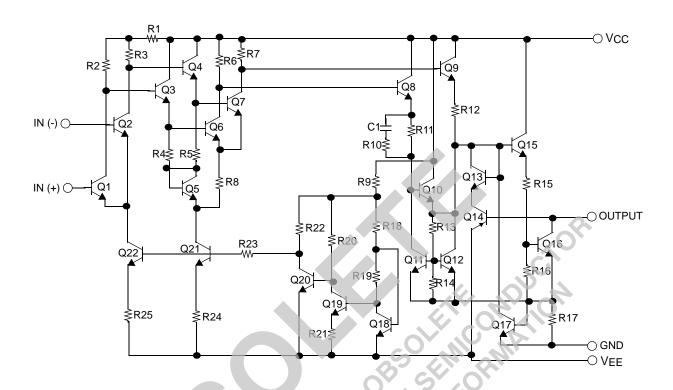

# **Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit	
Supply Voltage	Vcc	36	V	
Output to Negative Supply Voltage	Vo - VEE	36	V	
Ground to Negative Supply Voltage	VEE	25	V	
Ground to Positive Supply Voltage	Vcc	18	V	
Differential Input Voltage	VI(DIFF)	5	V	
Input Voltage	Vı	±15	V	
Output Short Circuit Duration	-	10	sec	
Power Dissipation	PD	500	mW	
Thermal Resistance Junction-Ambient Max.	Rθja	250	°C/W	
Operating Temperature Range	TOPR	0 ~ +70	°C	
Storage Temperature Range	TSTG	-65 ~ +150	°C	

#### **Electrical Characteristics**


(VCC = +15V, VEE = -15V,  $T_A = 25^{\circ}C$ , unless otherwise specified)

Parameter	Symbol	Conditions		LM319			Unit	
Parameter	Symbol	Condition	Conditions		Тур.	Max.	Unit	
Input Offset Voltage (Note1)	Vio	Rs≤5kΩ		-	2.0	8.0	mV	
		V2 ≥ 2K75	Note3	-	-	10		
Input Offset Current (Note1)	lio.			ı	10	200	nA	
input Onset Current (Note I)	lio		Note3	-	-	300	ΠA	
Input Bias Current	IBIAS			-	150	1000	nA	
			Note3	-	-	1200	nA	
Voltage Gain	G∨	-		8	40	-	V/mV	
Response Time (Note2)	TRES	VCC = ±15V		-	80	-	ns	
Saturation Voltage	VSAT	VCC=15V, VEE = -15V, \	$1 \le -5 \text{mV}, 10 = 25 \text{mA}$	-	0.6	1.5		
		$V_{CC} = 4.5V, V_{EE} = 0V$ $V_{I} \le -10$ mV, $I_{O} \le 3.2$ mA	Note3	.C	0.3	0.4	V	
Output Leakage Current	IO(LKG)	$V_I \ge 5mV$ , $V_O(P) = 35V$	4. 6		7.	-	μА	
			Note3	, <del>.</del> C	-	-		
		$V_I \ge 10$ mV, $V_O(P) = 35$ V		-	0.2	10		
Input Voltage Range	VI(R)	Note3	$VCC = \pm 15V$	1	±13	-	V	
			VCC = 5V, VEE = 0V	1	-	3		
Differential Input Voltage	VI(DIFF)		73.60	ı	-	±5	V	
Positive Supply Current	ICC1	VCC = 5V, VEE = 0V		-	3.6	-	mA	
Positive Supply Current	ICC2	Vcc = ±15V	O.P.	-	7.5	12.5	mA	
Negative Supply Current	İEE	Vcc = ±15V	<sup>2</sup>	-	3	5	mA	

#### Notes:

- 1. The offset voltage and offset currents given are the maximum values required to drive the output within a volt of either supply with a 1mA load. Thus, these parameters define an error band and take into account the worst case effects of voltage gain and input impedance.
- 2. The response time specified is for a 100 mV input step with 5 mV overdrive.
- 3. LM319:  $0 \le TA \le +70^{\circ}C$

# **Typical Performance Characteristics**



**Figure 1. Input Current** 




Figure 3. Transfer Function




Figure 5. Response Time Various Input Overdriver




Figure 2. Output Saturation Voltage




Figure 4. Response Time for Various Input Overdriver




Figure 6. Input Characteristics

# **Typical Performance Characteristics** (Continued)




Figure 7. Response Time for Various Input Overdriver


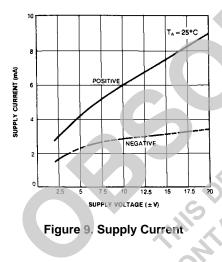


Figure 8. Response Time for Various Input Overdriver






Figure 10. Supply Current





Figure 11. Common Mode Limits




**Figure 12. Output Limiting Characteristics** 

# **Mechanical Dimensions**

#### **Package**

#### **Dimensions in millimeters**

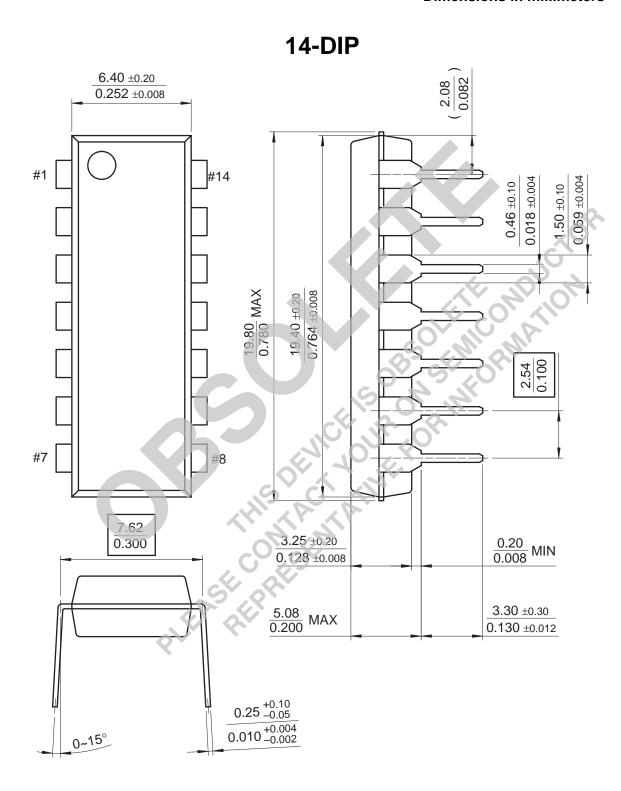


# **Mechanical Dimensions** (Continued)

#### **Package**

#### **Dimensions in millimeters**

# 14-SOP

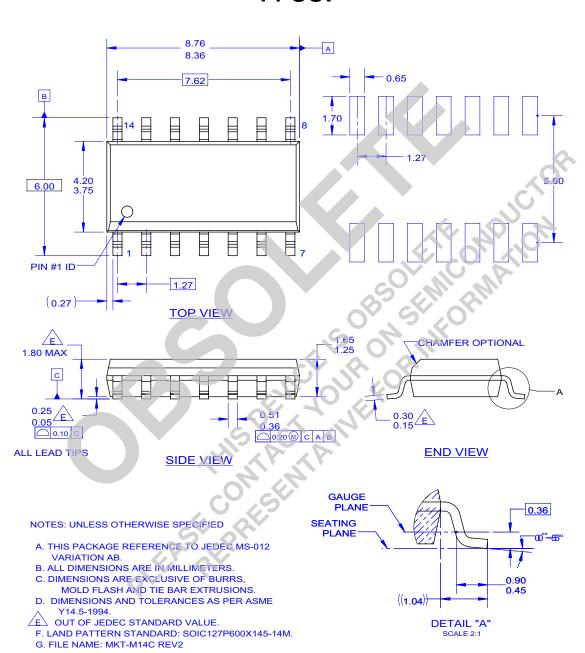

# **Ordering Information**

Product Number	Package	Operating Temperature	
LM319N	14-DIP	0 ~ +70°C	
LM319M	14-SOP	0~ +70 C	



#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



ON Semiconductor and III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="https://www.oisemi.com/site/pdf/Patent-Marking.pdf">www.oisemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor date sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemni

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative