

# Hex Inverting Schmitt Trigger

### **MM74HCT14**

#### Description

The MM74HCT14 utilizes advanced silicon-gate CMOS technology to achieve the low power dissipation and high noise immunity of standard CMOS, as well as the capability to drive 10 LS-TTL loads.

The 74HCT logic family is functionally and pinout–compatible with the standard 74LS logic family. Inputs are protected from damage due to static discharge by internal diode clamps to  $V_{\rm CC}$  and ground.

#### **Features**

- Typical Propagation Delay: 10 ns
- Wide Power Supply Range: 4.5 V 5.5 V
- Low Quiescent Current: 10 µA Maximum
- Low Input Current: 1 μA Maximum
- Fanout of 10 LS-TTL Loads
- Typical Hysteresis Voltage: 0.6 V at  $V_{CC} = 4.5 \text{ V}$
- TTL, LS Pin-out and Input Threshold Compatible
- This Device is Pb-Free, Halide Free and is RoHS Compliant

#### **Connection Diagram**




Figure 1. Pin Assignments

#### **Schematic Diagram**




Figure 2. Schematic


1








#### **MARKING DIAGRAMS**





XXXXXX = Specific Device Code A = Assembly Location WL, L = Wafer Lot Number

Y = Year WW, YW = Work Week

#### **ORDERING INFORMATION**

See detailed ordering and shipping information on page 4 of this data sheet.

#### MM74HCT14

#### **ABSOLUTE MAXIMUM RATINGS**

Symbol	Rating	Min	Max	Unit
V <sub>CC</sub>	Supply Voltage	-0.5	+6.5	V
V <sub>IN</sub>	DC Input Voltage	-0.5	V <sub>CC</sub> + 0.5	V
V <sub>OUT</sub>	DC Output Voltage	-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub> , I <sub>OK</sub>	Clamp Diode Current		±20	mA
lout	DC Output Current, Per Pin		±25	mA
I <sub>CC</sub>	DC V <sub>CC</sub> or GND Current, Per Pin		±50	mA
T <sub>STG</sub>	Storage Temperature Range	-65	+150	°C
TL	Lead Temperature (Soldering 10 second)		+260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Max	Unit
V <sub>CC</sub>	Supply Voltage	4.5	5.5	V
V <sub>IN</sub> , V <sub>OUT</sub>	DC Input or Output Voltage	0	$V_{CC}$	V
T <sub>A</sub>	Operating Temperature Range	-40	+85	°C

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

#### DC ELECTRICAL CHARACTERISTICS

		Parameter Conditions V <sub>CC</sub>		T <sub>A</sub> =	+25°C	T <sub>A</sub> = -40 to +85°C	
Symbol	Parameter		V <sub>CC</sub>	Typ Gua		ranteed Limits	Unit
$V_{T+}$	Positive-Going	Minimum	4.5	1.5	1.2	1.2	V
	Threshold Voltage		5.5	1.7	1.4	1.4	
		Maximum	4.5	1.5	1.9	1.9	
			5.5	1.7	2.1	2.1	
$V_{T-}$	Negative-Going	Minimum	4.5	0.9	0.5	0.5	V
	Threshold Voltage		5.5	1.0	0.6	0.6	
		Maximum	4.5	0.9	1.2	1.2	
			5.5	1.0	1.4	1.4	1
V <sub>H</sub>	Hysteresis Voltage	Minimum	4.5	0.6	0.4	0.4	V
			5.5	0.7	0.4	0.4	
		Maximum	4.5	0.6	1.4	1.4	
			5.5	0.7	1.5	1.5	
V <sub>OH</sub>	Minimum HIGH Level Output Voltage	$V_{IN} = V_{IH} \text{ or } V_{IL},$ $ I_{OUT}  = 20 \ \mu A$	4.5	V <sub>CC</sub>	V <sub>CC</sub> - 0.1	V <sub>CC</sub> - 0.1	V
		$V_{IN} = V_{IH} \text{ or } V_{IL},$ $ I_{OUT}  = 4.0 \text{ mA}$	4.5	4.20	3.98	3.84	
		$V_{IN} = V_{IH} \text{ or } V_{IL},$ $ I_{OUT}  = 4.8 \text{ mA}$	5.5	5.20	4.98	4.98	
V <sub>OL</sub>	Maximum LOW Level Voltage	$V_{IN} = V_{IH} \text{ or } V_{IL},$ $ I_{OUT}  = 20 \ \mu A$	4.5	0	0.1	0.1	V
		$V_{IN} = V_{IH} \text{ or } V_{IL},$ $ I_{OUT}  = 4.0 \text{ mA}$	4.5	0.2	0.26	0.33	
		$V_{IN} = V_{IH} \text{ or } V_{IL},$ $ I_{OUT}  = 4.8 \text{ mA}$	5.5	0.2	0.26	0.33	
I <sub>IN</sub>	Maximum Input Current	V <sub>IN</sub> = V <sub>CC</sub> or GND, V <sub>IH</sub> or V <sub>IL</sub>	5.5		±0.1	±1.0	μΑ

#### MM74HCT14

#### DC ELECTRICAL CHARACTERISTICS (continued)

				T <sub>A</sub> = +	-25°C	T <sub>A</sub> = -40 to +85°C	
Symbol	Parameter	Conditions	V <sub>CC</sub>	Тур	Guai	ranteed Limits	Unit
I <sub>CC</sub>	Maximum Quiescent Supply Current	$V_{IN} = V_{CC}$ or GND, $I_{OUT} = 0 \mu A$	5.5		1.0	10.0	μΑ
		V <sub>IN</sub> = 2.4 V or 0.5 V			2.4	2.4	mA

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

#### **AC ELECTRICAL CHARACTERISTICS**

 $(V_{CC} = 5.0 \text{ V}, T_A = 25^{\circ}\text{C}, C_L = 15 \text{ pF}, t_r = t_f = 6 \text{ ns})$ 

Symbol	Parameter	Тур	Guaranteed Limit	Unit
t <sub>PHL</sub> , t <sub>PLH</sub>	Maximum Propagation Delay	10	18	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

#### **AC ELECTRICAL CHARACTERISTICS**

(Unless otherwise specified,  $V_{CC}$  = 5.0 V  $\pm 10\%,\,C_L$  = 50 pF,  $t_r$  =  $t_f$  = 6 ns)

			T <sub>A</sub> = +	⊦25°C	T <sub>A</sub> = -40 to +85°C	
Symbol	Parameter	Conditions	Тур	Gua	ranteed Limits	Unit
t <sub>PHL</sub> , t <sub>PLH</sub>	Maximum Propagation Delay			20	25	ns
t <sub>TLH</sub> , t <sub>THL</sub>	Maximum Output Rise and Fall Time		9	15	19	ns
C <sub>PD</sub>	Power Dissipation Capacitance (Note 1)	Per Gate		25		pF
C <sub>IN</sub>	Maximum Input Capacitance		5	10	10	pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1.  $C_{PD}$  determines the no-load dynamic power consumption,  $P_D = C_{PD} \, V_{CC}^2 f + I_{CC} \, V_{CC}$ , and the no load dynamic current consumption,

#### **Typical Applications**




Figure 3. Low Power Oscillator




Figure 4. Oscillator Input and Output Waveforms

The following equations assume  $t_1 + t_2 >> t_{pd0} + t_{pd1}$ :

$$t_2 \approx RCIn \frac{V_{CC} - V_{T-}}{V_{CC} - V_{T+}}$$
 (eq. 1)

$$f \approx \frac{1}{\text{RCIn} \frac{V_{T+}(V_{CC} - V_{T-})}{V_{T-}(V_{CC} - V_{T+})}}$$
 (eq. 2)

 $I_S = C_{PD} V_{CC} f + I_{CC}$ 

#### MM74HCT14

#### **ORDERING INFORMATION**

Device	Marking	Package	Shipping <sup>†</sup>
MM74HCT14M	HCT14A	SOIC-14 NB, Case 751A (Pb-Free and Halide Free)	55 Units / Tube
MM74HCT14MX	HCT14A	SOIC14, Case 751EF (Pb-Free and Halide Free)	2500 Units / Tape & Reel
MM74HCT14MTCX	HCT 14A	TSSOP-14 WB, Case 948G (Pb-Free and Halide Free)	2500 Units / Tape & Reel

For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, <u>BRD8011/D</u>.

NOTES:
1. DIMENSIONING AND TOLERANCING PER

5. MAXIMUM MOLD PROTRUSION 0.15 PER

**MILLIMETERS** 

MIN MAX

1.27 BSC

0.19

0.25

0.40

SIDE

Α

A1 0.10

АЗ

**b** 0.35

D 8.55 E 3.80

e H h


ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.13 TOTAL IN EXCESS OF AT MAXIMUM MATERIAL CONDITION.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD PROTRUSIONS.








SOIC-14 NB CASE 751A-03 ISSUE L

**DATE 03 FEB 2016** 

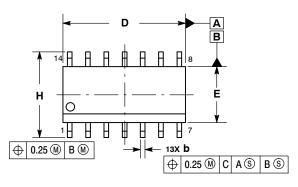







## GENERIC MARKING DIAGRAM\*

INCHES

MIN MAX

0.050 BSC

0.068

0.019

0.054

0.25 | 0.004 | 0.010


0.25 0.008 0.010

0.50 0.010 0.019

1.25 0.016 0.049

0.49 0.014

8.55 8.75 0.337 0.344 3.80 4.00 0.150 0.157



XXXXX = Specific Device Code A = Assembly Location

WL = Wafer Lot
 Y = Year
 WW = Work Week
 G = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

### 

\*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DIMENSIONS: MILLIMETERS

#### **STYLES ON PAGE 2**

DOCUMENT NUMBER:	98ASB42565B	B Electronic versions are uncontrolled except when accessed directly from the Docu Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in			
DESCRIPTION:	SOIC-14 NB		PAGE 1 OF 2		

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

#### SOIC-14 CASE 751A-03 ISSUE L

#### DATE 03 FEB 2016

STYLE 1: PIN 1. COMMON CATHODE 2. ANODE/CATHODE 3. ANODE/CATHODE 4. NO CONNECTION 5. ANODE/CATHODE 6. NO CONNECTION 7. ANODE/CATHODE 8. ANODE/CATHODE 9. ANODE/CATHODE 10. NO CONNECTION 11. ANODE/CATHODE 12. ANODE/CATHODE 13. NO CONNECTION 14. COMMON ANODE	STYLE 2: CANCELLED	STYLE 3: PIN 1. NO CONNECTION 2. ANODE 3. ANODE 4. NO CONNECTION 5. ANODE 6. NO CONNECTION 7. ANODE 8. ANODE 9. ANODE 10. NO CONNECTION 11. ANODE 12. ANODE 13. NO CONNECTION 14. COMMON CATHODE	STYLE 4: PIN 1. NO CONNECTION 2. CATHODE 3. CATHODE 4. NO CONNECTION 5. CATHODE 6. NO CONNECTION 7. CATHODE 8. CATHODE 9. CATHODE 10. NO CONNECTION 11. CATHODE 12. CATHODE 13. NO CONNECTION 14. COMMON ANODE
STYLE 5: PIN 1. COMMON CATHODE 2. ANODE/CATHODE 3. ANODE/CATHODE 4. ANODE/CATHODE 5. ANODE/CATHODE 6. NO CONNECTION 7. COMMON ANODE 8. COMMON CATHODE 9. ANODE/CATHODE 10. ANODE/CATHODE 11. ANODE/CATHODE 12. ANODE/CATHODE 13. NO CONNECTION 14. COMMON ANODE	STYLE 6: PIN 1. CATHODE 2. CATHODE 3. CATHODE 4. CATHODE 5. CATHODE 6. CATHODE 7. CATHODE 8. ANODE 9. ANODE 10. ANODE 11. ANODE 12. ANODE 13. ANODE 14. ANODE	STYLE 7: PIN 1. ANODE/CATHODE 2. COMMON ANODE 3. COMMON CATHODE 4. ANODE/CATHODE 6. ANODE/CATHODE 6. ANODE/CATHODE 7. ANODE/CATHODE 8. ANODE/CATHODE 9. ANODE/CATHODE 10. ANODE/CATHODE 11. COMMON CATHODE 12. COMMON ANODE 13. ANODE/CATHODE 14. ANODE/CATHODE	STYLE 8: PIN 1. COMMON CATHODE 2. ANODE/CATHODE 3. ANODE/CATHODE 4. NO CONNECTION 5. ANODE/CATHODE 6. ANODE/CATHODE 7. COMMON ANODE 8. COMMON ANODE 9. ANODE/CATHODE 10. ANODE/CATHODE 11. NO CONNECTION 12. ANODE/CATHODE 13. ANODE/CATHODE 14. COMMON CATHODE


DOCUMENT NUMBER:	98ASB42565B	65B Electronic versions are uncontrolled except when accessed directly from the Printed versions are uncontrolled except when stamped "CONTROLLED C	
DESCRIPTION:	SOIC-14 NB		PAGE 2 OF 2


onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.




SOIC14 CASE 751EF **ISSUE O** 


**DATE 30 SEP 2016** 

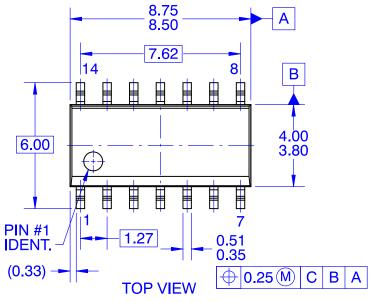




LAND PATTERN RECOMMENDATION

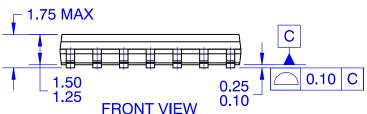



#### NOTES:

- A. CONFORMS TO JEDEC MS-012, VARIATION AB, ISSUE C
  B. ALL DIMENSIONS ARE IN MILLIMETERS
- C. DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS
- D. LAND PATTERN STANDARD:
- SOIC127P600X145-14M
- E. CONFORMS TO ASME Y14.5M, 2009




**DETAIL A SCALE 16:1** 

DOCUMENT NUMBER:	IMBER: 98AON13739G Electronic versions are uncontrolled except when accessed directly from the Printed versions are uncontrolled except when stamped "CONTROLLED CO		
DESCRIPTION:	SOIC14		PAGE 1 OF 1

onsemi and ONSemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**DATE 17 FEB 2016** 



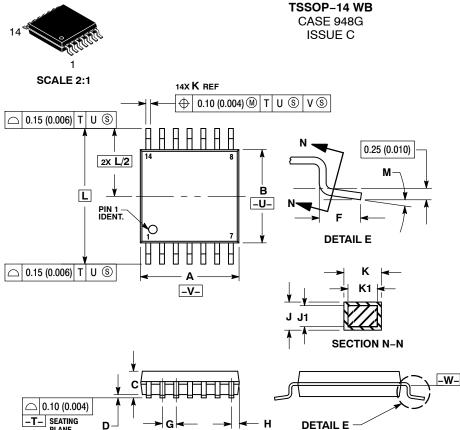

- NOTES.

  1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

  2. CONTROLLING DIMENSION: MILLIMETER.

  3. DIMENSION A DOES NOT INCLUDE MOLD
- FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
  DIMENSION B DOES NOT INCLUDE
- INTERLEAD FLASH OR PROTRUSION.
  INTERLEAD FLASH OR PROTRUSION SHALL
- INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.

  DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.

  TERMINAL NUMBERS ARE SHOWN FOR DEEEDENIC OMITY.
- REFERENCE ONLY.
  DIMENSION A AND B ARE TO BE
- DETERMINED AT DATUM PLANE -W-

	MILLIMETERS		INC	HES	
DIM	MIN	MAX	MIN	MAX	
Α	4.90	5.10	0.193	0.200	
В	4.30	4.50	0.169	0.177	
С		1.20		0.047	
D	0.05	0.15	0.002	0.006	
F	0.50	0.75	0.020	0.030	
G	0.65	BSC	0.026 BSC		
Н	0.50	0.60	0.020	0.024	
J	0.09	0.20	0.004	0.008	
J1	0.09	0.16	0.004	0.006	
K	0.19	0.30	0.007	0.012	
K1	0.19	0.25	0.007	0.010	
L	6.40	BSC	0.252	BSC	
м	o °	8 °	o °	a °	

#### **GENERIC MARKING DIAGRAM\***



= Assembly Location

= Wafer Lot = Year


= Work Week W

= Pb-Free Package (Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may

not follow the Generic Marking.

#### **RECOMMENDED SOLDERING FOOTPRINT\***

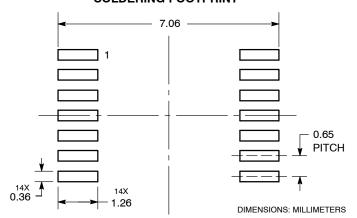

\*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98ASH70246A	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	TSSOP-14 WB		PAGE 1 OF 1

onsemi and ONSEMI. are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI., and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems. or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales