

Test Procedure for the NCP1593 Evaluation Board

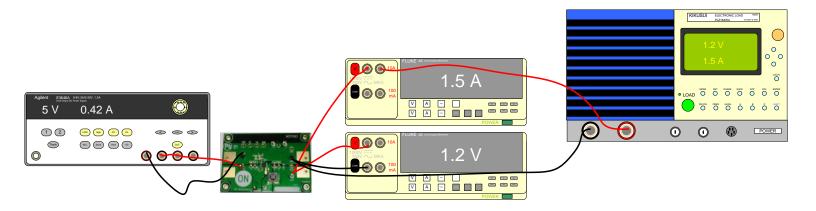


Figure 1: Test Setup

The following steps describe the test procedure for all of these boards:

Suggested Equipment:

Current limited DC Power Supply (e.g. AGILENT 6645A)	1pc
DC Volt-Meter able to measure up to 60 V DC (e.g. KEITHLEY 2000)	2pcs
DC Amp-Meter able to measure up to 1 A DC (e.g. KEITHLEY 2000)	1pc
DC Amp-Meter able to measure up to 6 A DC (e.g. FLUKE 89 IV)	1pc
DC Electronic Load (e.g. AGILENT 6060B)	1pc

7/25/2012 - 1 - www.onsemi.com

ON Semiconductor

Test Procedure:

- 1. Connect the test setup as shown in Figure 1.*
- 2. Apply an input voltage, V_{IN} = 4-5 Vdc (Current Limit must be set to 5A)
- 5. Apply Iouт(load) = 0 A
- 4. Check that Vouт = 1.1 − 1.9 Vdc
- 6. Set lout to desired level 0 A- 3 A
- 7. Check that Vout = 1.15 1.25 Vdc
- 8. Turn off the load
- 9. Turn off VIN
- 10. End of the test

7/25/2012 - 2 - www.onsemi.com

^{*}Keep lead length from Input Supply to IN,GND connections short.