

NVC6S5A444NLZ

Power MOSFET

60 V, 78 mΩ, 4.5 A, N-Channel

Automotive Power MOSFET designed to minimize gate charge and low on resistance. AEC-Q101 qualified MOSFET and PPAP capable suitable for automotive applications.

Features

- 4.5 V Drive
- High ESD Protection
- Low On-Resistance
- CPH6 Package is Pin-Compatible with SOT-26
- Pb-Free, Halogen Free and RoHS Compliance

Typical Applications

- Load Switch
- Motor Drive

Specifications

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

| Parameter | Symbol | Value | Unit |
|---|----------------|-----------------|------------------|
| Drain to Source Voltage | V_{DS} | 60 | V |
| Gate to Source Voltage | V_{GS} | ± 20 | V |
| Drain Current (DC) (Note 1) | I_D | 4.5 | A |
| Drain Current (DC) (Note 2) | | 3.5 | A |
| Drain Current (Pulse) $PW \leq 10 \mu\text{s}$, duty cycle $\leq 1\%$ | I_{DP} | 18 | A |
| Power Dissipation $T_a = 25^\circ\text{C}$ (Note 1) | P_D | 1.9 | W |
| Power Dissipation $T_a = 25^\circ\text{C}$ (Note 2) | | 0.97 | W |
| Junction Temperature and Storage Temperature | T_J, T_{stg} | -55 to $+175$ | $^\circ\text{C}$ |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL RESISTANCE MAXIMUM RATINGS

| Parameter | | Symbol | Value | Unit |
|---------------------|----------|------------------|-------|------|
| Junction to Ambient | (Note 1) | R _{θJA} | 78.1 | °C/W |
| | (Note 2) | | 153 | °C/W |

1. Surface mounted on ceramic substrate ($900 \text{ mm}^2 \times 0.8 \text{ mm}$).
2. Surface mounted on FR4 board using a 92 mm^2 , 1 oz. Cu pad.




ON Semiconductor®


www.onsemi.com

| V_{DS} | $R_{DS(on)}$ MAX | I_D MAX |
|----------|------------------|-----------|
| 60 V | 78 mΩ @ 10 V | 4.5 A |
| | 120 mΩ @ 4.5 V | |


ELECTRICAL CONNECTION N-Channel



MARKING DIAGRAM



CASE 318BD



ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 5 of this data sheet.

NVC6S5A444NLZ

ELECTRICAL CHARACTERISTICS (T_a = 25°C)

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|--|----------------------|--|-----|------|-----|------|
| Drain to Source Breakdown Voltage | V _{(BR)DSS} | I _D = 1 mA, V _{GS} = 0 V | 60 | – | – | V |
| Zero-Gate Voltage Drain Current | I _{DSS} | V _{DS} = 60 V, V _{GS} = 0 V | – | – | 1.0 | μA |
| Gate to Source Leakage Current | I _{GSS} | V _{GS} = ±16 V, V _{DS} = 0 V | – | – | ±10 | μA |
| Gate Threshold Voltage | V _{GS(th)} | V _{DS} = 10 V, I _D = 1 mA | 1.2 | – | 2.6 | V |
| Forward Transconductance | g _{FS} | V _{DS} = 10 V, I _D = 2 A | – | 3.0 | – | S |
| Static Drain to Source On-State Resistance | R _{DS(on)} | I _D = 2 A, V _{GS} = 10 V | – | 60 | 78 | mΩ |
| | | I _D = 1 A, V _{GS} = 4.5 V | – | 84 | 120 | mΩ |
| Input Capacitance | C _{iss} | V _{DS} = 20 V, f = 1 MHz | – | 505 | – | pF |
| Output Capacitance | C _{oss} | | – | 57 | – | pF |
| Reverse Transfer Capacitance | C _{rss} | | – | 37 | – | pF |
| Turn-ON Delay Time | t _{d(on)} | See Figure 1 | – | 7.3 | – | ns |
| Rise Time | t _r | | – | 9.8 | – | ns |
| Turn-OFF Delay Time | t _{d(off)} | | – | 40 | – | ns |
| Fall Time | t _f | | – | 24 | – | ns |
| Total Gate Charge | Q _g | V _{DS} = 30 V, V _{GS} = 10 V, I _D = 4.5 A | – | 10 | – | nC |
| Gate to Source Charge | Q _{gs} | | – | 1.6 | – | nC |
| Gate to Drain "Miller" Charge | Q _{gd} | | – | 2.1 | – | nC |
| Forward Diode Voltage | V _{SD} | I _S = 4.5 A, V _{GS} = 0 V | – | 0.86 | 1.2 | V |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

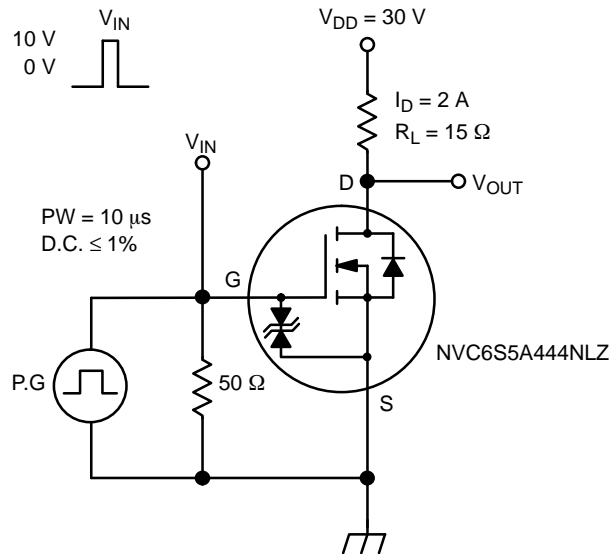


Figure 1. Switching Time Test Circuit

TYPICAL CHARACTERISTICS

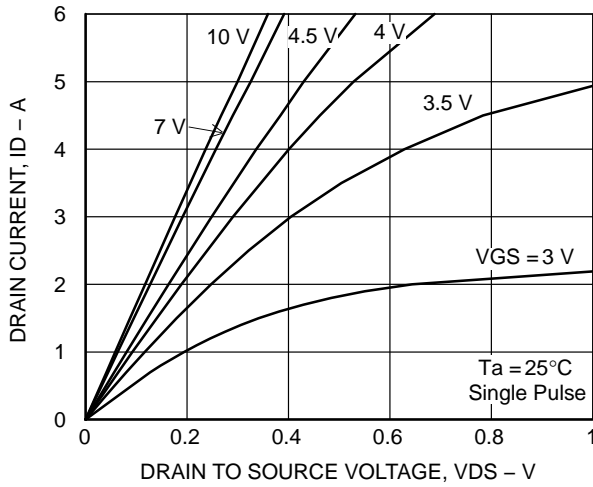


Figure 2. $I_D - V_{DS}$

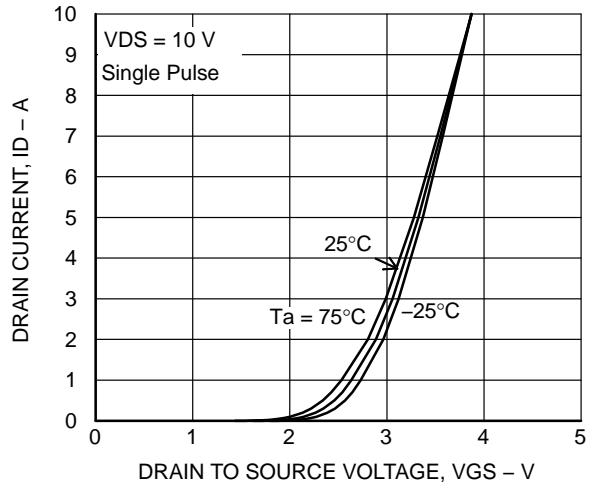


Figure 3. $I_D - V_{GS}$

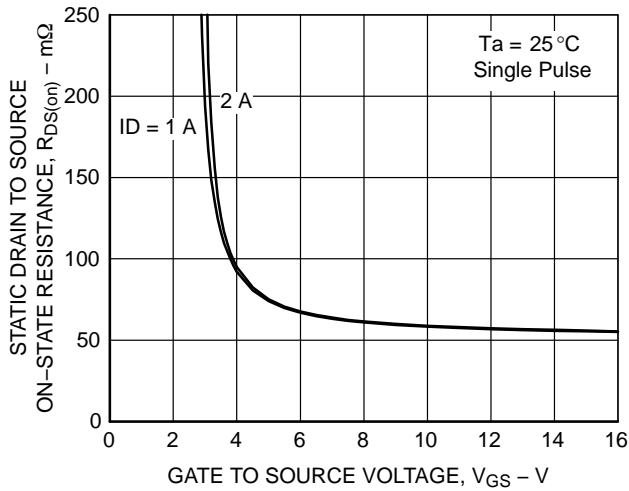


Figure 4. $R_{DS(on)} - V_{GS}$

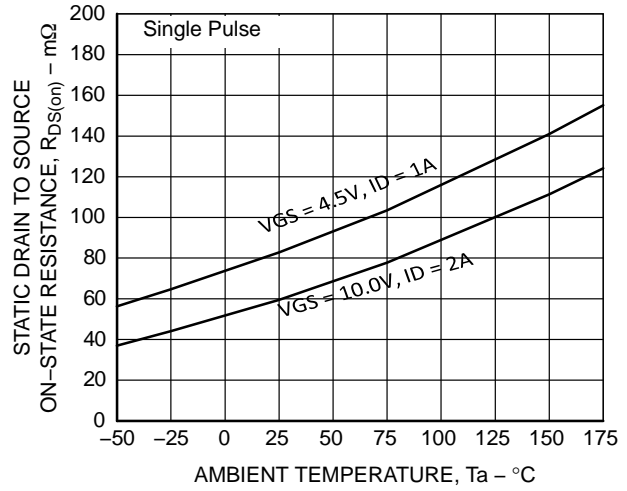


Figure 5. $R_{DS(on)} - T_a$

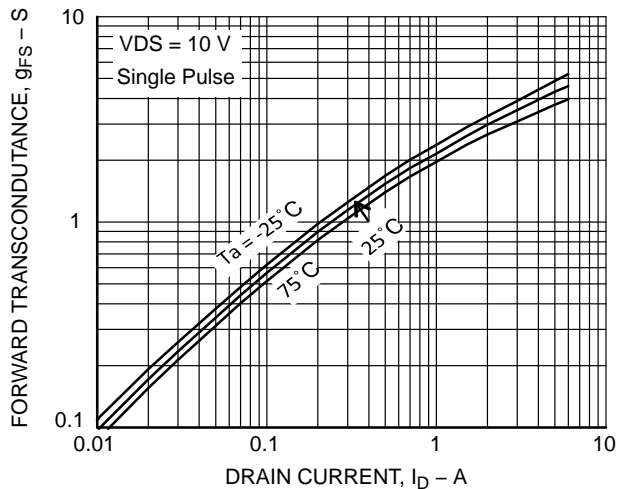


Figure 6. $g_{FS} - I_D$

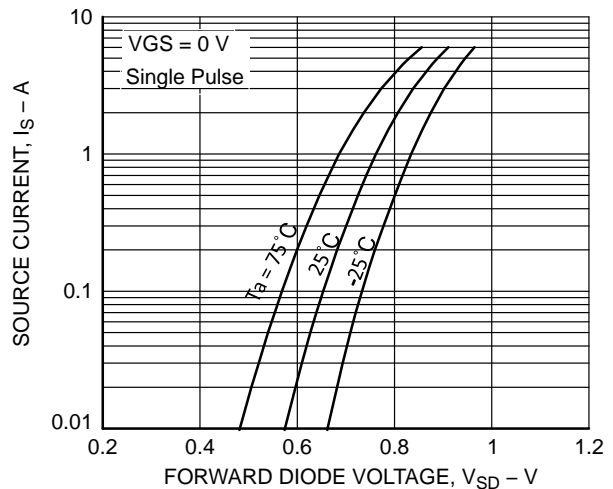


Figure 7. $I_S - V_{SD}$

TYPICAL CHARACTERISTICS

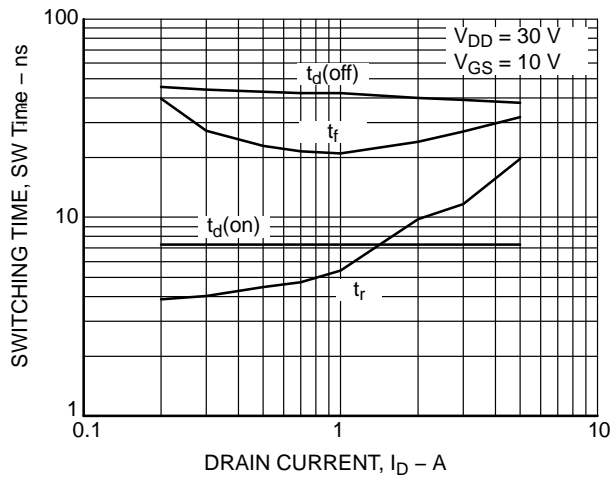


Figure 8. SW TIME - I_D

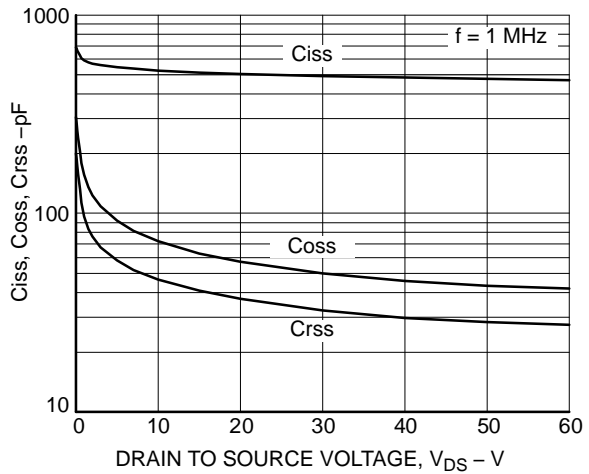


Figure 9. Ciss, Coss, Crss - V_{DS}

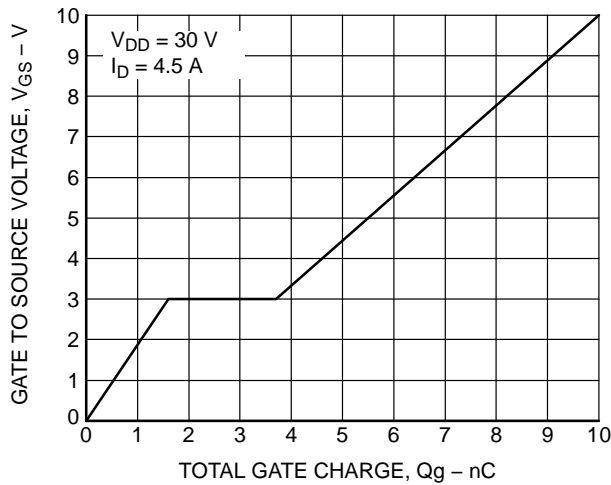


Figure 10. V_{GS} - Q_g

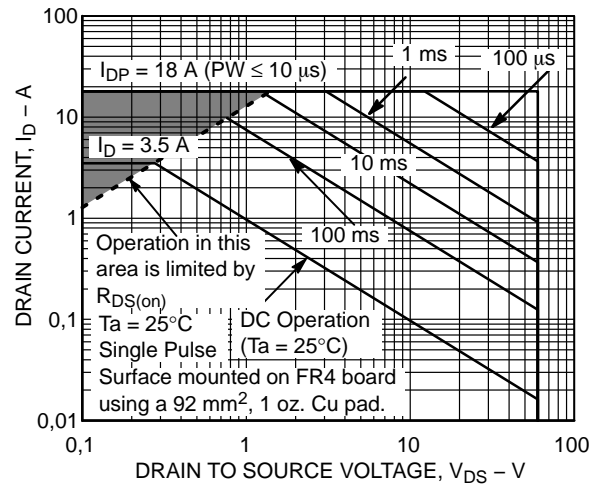


Figure 11. SOA

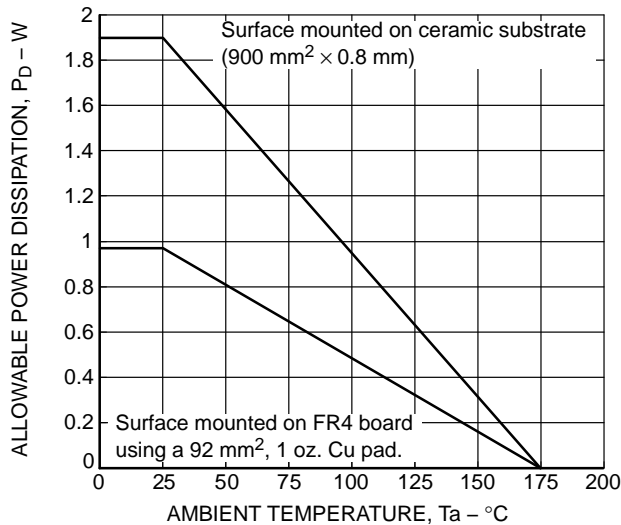


Figure 12. P_D - T_a

NVC6S5A444NLZ

TYPICAL CHARACTERISTICS

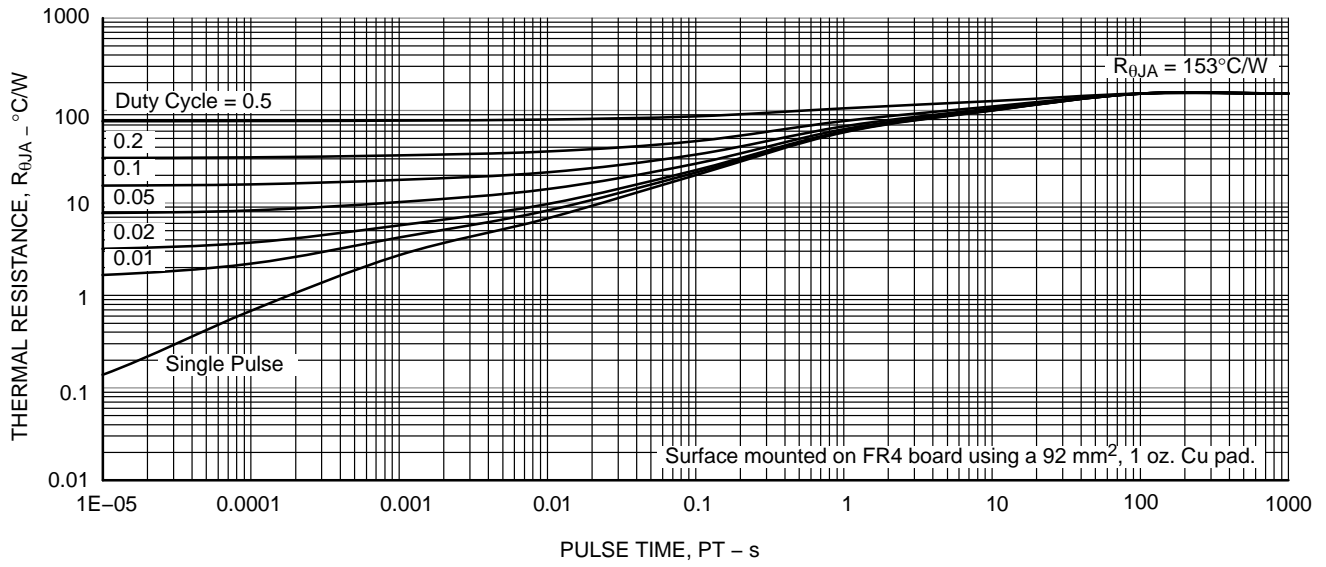



Figure 13. $R_{\theta JA}$ – PULSE TIME

DEVICE ORDERING INFORMATION

| Device | Marking | Package | Shipping [†] |
|------------------|---------|----------------------------------|-----------------------|
| NVC6S5A444NLZT1G | ZW | CPH6 (Pb-Free / Halogen Free) | 3,000 / Tape & Reel |
| NVC6S5A444NLZT2G | | | |


[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

Since the NVC6S5A444NLZ is a MOSFET product, please avoid using this device in the vicinity of highly charged objects.



CPH6 2.90x1.60x0.90, 0.95P
CASE 318BD
ISSUE A

DATE 20 SEPT 2024

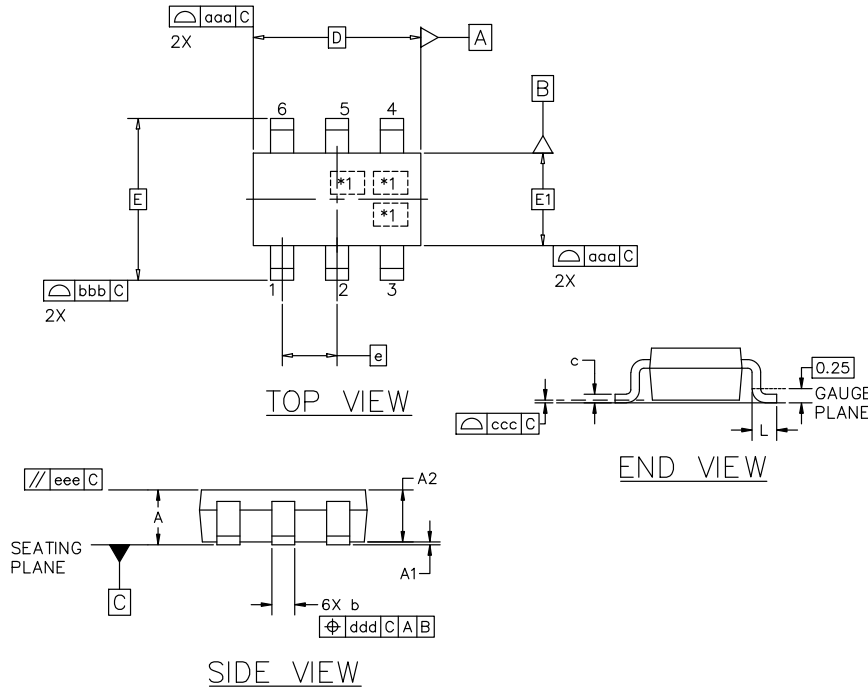


| MILLIMETERS | | | |
|-----------------------------|----------|------|------|
| DIM | MIN | NOM | MAX |
| A | 0.85 | 0.95 | 1.05 |
| A1 | 0.00 | 0.05 | 0.10 |
| A2 | 0.85 | 0.90 | 0.95 |
| b | 0.30 | 0.40 | 0.50 |
| c | 0.10 | 0.15 | 0.25 |
| D | 2.90 BSC | | |
| E | 2.80 BSC | | |
| E1 | 1.60 BSC | | |
| e | 0.95 BSC | | |
| L | 0.10 | 0.20 | 0.30 |
| TOLERANCE FORM AND POSITION | | | |
| aaa | 0.10 | | |
| bbb | 0.15 | | |
| ccc | 0.05 | | |
| ddd | 0.10 | | |
| eee | 0.10 | | |

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
2. CONTROLLING DIMENSION: MILLIMETERS
3. *1 IS FOR LOT INDICATION


GENERIC
MARKING DIAGRAM*



XXX = Specific Device Code
M = Date Code
▪ = Pb-Free Package

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

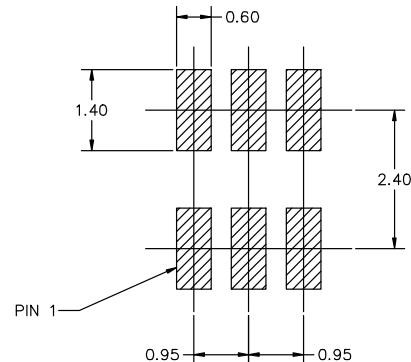

RECOMMENDED MOUNTING FOOTPRINT

* For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERM/D.

| | | |
|------------------|----------------------------|--|
| DOCUMENT NUMBER: | 98AON65440E | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION: | CPH6 2.90x1.60x0.90, 0.95P | PAGE 1 OF 1 |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales