

NPN Low Saturation Transistor

NZT902

These devices are designed with high current gain and low saturation voltage with collector currents up to 3 A continuous.

Features

• This is a Pb-Free Device

ABSOLUTE MAXIMUM RATINGS (Notes 1, 2)

(T_A = 25°C unless otherwise noted.)

Symbol	Parameter	Value	Unit
V _{CEO}	Collector-Emitter Voltage	90	V
V _{CBO}	Collector-Base Voltage	120	V
V _{EBO}	Emitter-Base Voltage	5	V
Ic	Collector Current – Continuous	3	Α
TJ	Junction Temperature	150	°C
T _{STG}	Storage Temperature Range	-55 to ∼+150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


- 1. These ratings are based on a maximum junction temperature of 150°C.
- These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

THERMAL CHARACTERISTICS (Note 3)

 $(T_A = 25^{\circ}C \text{ unless otherwise noted.})$


Symbol	Characteristics	Value	Unit
P _D	Total Device Dissipation	1	W
$R_{ heta JA}$	Thermal Resistance, Junction to Ambient	125	°C/W

3. Device mounted on FR-4 PCB 36 mm \times 18 mm \times 1.5 mm.



SOT-223 CASE 318H 1:Base 2:Collector 3:Emitter

MARKING DIAGRAM



A = Assembly Location
 Y = Year
 W = Work Week
 902 = Specific Device Code

ORDERING INFORMATION

Device	Package	Shipping [†]
NZT902	SOT-223 (Pb-Free)	4000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

NZT902

ELECTRICAL CHARACTERISTICS (Note 4)

 $(T_A = 25^{\circ}C \text{ unless otherwise noted.})$

Symbol	Parameter	Test Condition	Min	Тур	Max	Unit
BV _{CEO}	Collector-Emitter Breakdown Voltage	I _C = 10 mA	90			V
BV _{CBO}	Collector-Base Breakdown Voltage	I _C = 100 μA	120			V
BV _{EBO}	Emitter-Base Breakdown Voltage	I _E = 100 μA	5			V
I _{CBO}	Collector-Base Cut-Off Current	V _{CB} = 100 V			100	nA
		V _{CB} = 100 V, T _A = 100°C			10	μΑ
I _{EBO}	Emitter-Base Cut-Off Current	V _{EB} = 4 V			100	nA
h _{FE}	DC Current Gain	I _C = 0.1 A, V _{CE} = 2 V	80			
		I _C = 1 A, V _{CE} = 2 V	80			1
		I _C = 2 A, V _{CE} = 2 V	25			1
V _{CE} (sat)	Collector-Emitter Saturation Voltage	I _C = 0.1 A, I _B = 5.0 mA			50	mV
		I _C = 1.0 A, I _B = 100 mA			250	1
		I _C = 3.0 A, I _B = 300 mA			600	1
V _{BE} (sat)	Base-Emitter Saturation Voltage	I _C = 1.0 A, I _B = 100 mA			1.25	V
C _{obo}	Output Capacitance	V _{CB} = 10 V, I _E = 0, f = 1 MHz			35	pF
f _T	Transition Frequency	I _C = 100 mA, V _{CE} = 5 V, f = 100 MHz	75			MHz

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

^{4.} Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%

NZT902

TYPICAL PERFORMANCE CHARACTERISTICS




Figure 1. Static Characteristic




Figure 2. DC Current Gain




Figure 3. Collector-Emitter Saturation Voltage




Figure 4. Base-Emitter Saturation Voltage




Figure 5. Output Capacitance




Figure 6. Power Dissipation vs.

Ambient Temperature

NZT902

TYPICAL PERFORMANCE CHARACTERISTICS





Figure 7. Safe Operating Area



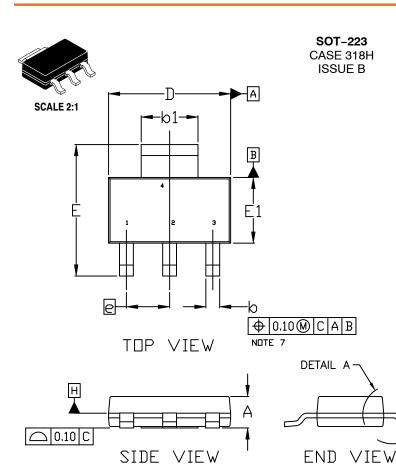


DATE 13 MAY 2020

NUTES:

- DIMENSIONING AND TOLERANCING PER ASME
- DIMENSIDNING AND TOLERANCING PER ASME Y14.5M, 2009.
 CONTROLLING DIMENSION: MILLIMETERS DIMENSIONS D & E1 ARE DETERMINED AT DATUM H. DIMENSIONS DO NOT INCLUDE MOLD FLASH, PROTRUSIONS DR GATE BURRS. SHALL NOT EXCEED 0.23mm PER SIDE.
 LEAD DIMENSIONS & AND &1 DO NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBBAR PROTRUSION. ALLOWABLE DAMBBAR PROTRUSION IS 0.08mm PER SIDE.
 DATUMS A AND B ARE DETERMINED AT DATUM H. A1 IS DEFINED AS THE VERTICAL DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT OF THE PACKAGE BODY.
 POSITIONAL TOLERANCE APPLIES TO DIMENSIONS & AND &1.


- b AND b1.

	MILLIMETERS		
DIM	MIN.	N□M.	MAX.
Α			1.80
A1	0.02	0.06	0.11
b	0.60	0.74	0.88
b1	2.90	3.00	3.10
С	0.24		0.35
D	6.30	6.50	6.70
E	6.70	7.00	7.30
E1	3.30	3.50	3.70
е	2.30 BSC		
L	0.25		
Ż	0*		10°

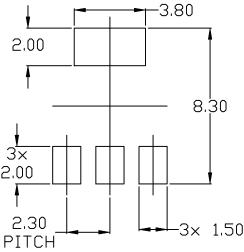

GENERIC MARKING DIAGRAM*

A1



= Assembly Location

Υ = Year

DETAIL A

W = Work Week

XXXXX = Specific Device Code

= Pb-Free Package

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

RECOMMENDED MOUNTING FOOTPRINT

For additional information on our Pb-Free strategy and soldering details, please download the IIN Semiconductor Soldering and Mounting Techniques Reference Manual, SILDERRM/D.

DOCUMENT NUMBER:	98ASH70634A	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOT-223		PAGE 1 OF 1	

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales