MOSFET – Power, Single, N-Channel, TOLL

60 V, 0.9 mΩ, 422 A

NTBLS001N06C

$V_{(BR)DSS}$	$R_{DS(ON)}$ MAX	I_D MAX
60 V	0.9 mΩ @ 10 V	422 A
	1.4 mΩ @ 6 V	



MO−299A
TOLL
CASE
100CU

Features

- Low $R_{DS(on)}$ to Minimize Conduction Losses
- Low Q_G and Capacitance to Minimize Driver Losses
- Lowers Switching Noise/EMI
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant

Applications

- Power Tools, Battery Operated Vacuums
- UAV/Drones, Material Handling
- BMS/Storage, Home Automation

MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)

Parameter			Symbol	Value	Unit
Drain−to−Source Voltage			V_{DSS}	60	V
Gate−to−Source Voltage			V_{GS}	±20	V
Continuous Drain Current $R_{\theta JC}$ (Note 2)	Steady State	T_C = 25°C	I_D	422	A
Power Dissipation $R_{\theta JC}$ (Note 2)	Steady State	T_C = 25°C	P_D	284	W
Continuous Drain Current $R_{\theta JA}$ (Notes 1, 2)	Steady State	T_A = 25°C	I_D	51	A
Power Dissipation $R_{\theta JA}$ (Notes 1, 2)	Steady State	T_A = 25°C	P_D	4.2	W
Pulsed Drain Current	T_A = 25°C, t_p = 10 μs		I_{DM}	900	A
Operating Junction and Storage Temperature Range			T_J, T_{stg}	−55 to +175	°C
Source Current (Body Diode)			I_S	236	A
Single Pulse Drain−to−Source Avalanche Energy ($I_{L(pk)}$ = 39 A)			E_{AS}	760	mJ
Lead Temperature Soldering Reflow for Soldering Purposes (1/8″ from case for 10 s)			T_L	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL RESISTANCE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Junction−to−Case − Steady State (Note 2)	$R_{\theta JC}$	0.53	°C/W
Junction−to−Ambient − Steady State (Note 2)	$R_{\theta JA}$	36	

1. Surface−mounted on FR4 board using a 1 in^2 pad size, 2 oz. Cu pad.
2. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.

ORDERING INFORMATION

Device	Package	Shipping†
NTBLS001N06C	MO−299A (Pb−Free)	2000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

© Semiconductor Components Industries, LLC, 2018

Table 1. ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Units
OFF CHARACTERISTICS							
Drain−to−Source Breakdown Voltage	$V_{(BR)DSS}$	I_D = 250 μA, V_{GS} = 0 V		60			V
Drain−to−Source Breakdown Voltage Temperature Coefficient	$V_{(BR)DSS}/T_J$	I_D = 562 μA, ref to 25°C			26		mV/°C
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 60 V, V_{GS} = 0 V	T_J = 25°C			10	μA
			T_J = 125°C			100	μA
Gate−to−Source Leakage Current	I_{GSS}	V_{DS} = 0 V, V_{GS} = 20 V				100	nA
ON CHARACTERISTICS (Note 3)							
Gate Threshold Voltage	$V_{GS(th)}$	V_{GS} = V_{DS}, I_D = 562 μA		2.0	2.8	4.0	V
Negative Threshold Temperature Coefficient	$V_{GS(th)}/T_J$	I_D = 562 μA, ref to 25°C			9.9		mV/°C
Drain−to−Source On Resistance	$R_{DS(on)}$	V_{GS} = 10 V, I_D = 80 A			0.75	0.9	mΩ
Drain−to−Source On Resistance	$R_{DS(on)}$	V_{GS} = 6 V, I_D = 56 A			1.09	1.4	mΩ
Forward Transconductance	g_{FS}	V_{DS} = 5 V, I_D = 80 A			290		S
Gate−Resistance	R_G	T_A = 25°C			0.6		Ω
CHARGES & CAPACTIANCES							
Input Capacitance	C_{iss}	V_{GS} = 0 V, V_{DS} = 30 V, f = 10 kHz			11575		pF
Output Capacitance	C_{oss}				5973		pF
Reverse Transfer Capacitance	C_{rss}				76		pF
Total Gate Charge	$Q_{G(tot)}$	V_{GS} = 10 V, V_{DS} = 30 V, I_D = 80 A			143		nC
Threshold Gate Charge	$Q_{G(th)}$				31		nC
Gate−to−Source Charge	Q_{gs}				54		nC
Gate−to−Drain Charge	Q_{gd}				13		nC
Total Gate Charge	$Q_{G(tot)}$	V_{GS} = 6 V, V_{DS} = 30 V, I_D = 80 A			52		nC
SWITCHING CHARACTERISTICS, V_{GS} = 10 V (Note 3)							
Turn−On Delay Time	$t_{d(on)}$	V_{GS} = 10 V, V_{DS} = 30 V, I_D = 80 A, R_G = 6 Ω			34		ns
Rise Time	t_r				53		ns
Turn−Off Delay Time	$t_{d(off)}$				119		ns
Fall Time	t_f				91		ns
DRAIN−SOURCE DIODE CHARACTERISTICS							
Forward Diode Voltage	V_{SD}	I_S = 80 A, V_{GS} = 0 V	T_J = 25°C		0.79	1.2	V
		I_S = 80 A, V_{GS} = 0 V	T_J = 125°C		0.66		V
Reverse Recovery Time	t_{rr}	V_{GS} = 0 V, dI_S/d_t = 100 A/μs, I_S = 56 A			120		ns
Charge Time	t_a				60		ns
Discharge Time	t_b				60		ns
Reverse Recovery Charge	Q_{rr}				322		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

3. Switching characteristics are independent of operating junction temperatures

TYPICAL CHARACTERISTICS

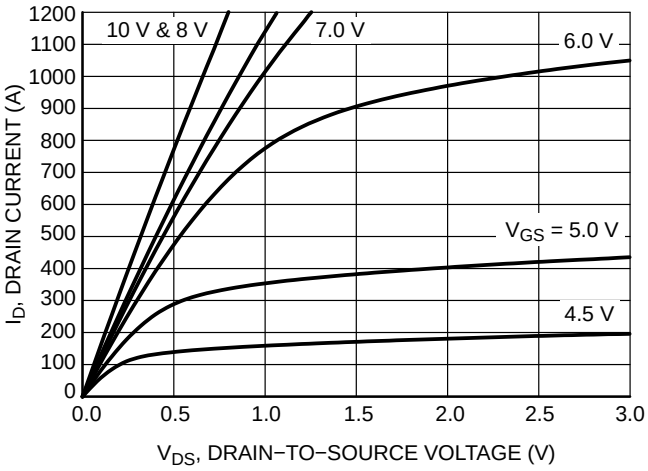

Figure 1. On−Region Characteristics

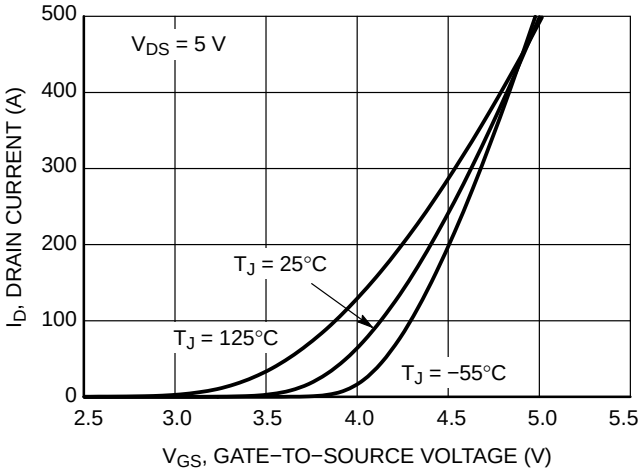

Figure 2. Transfer Characteristics

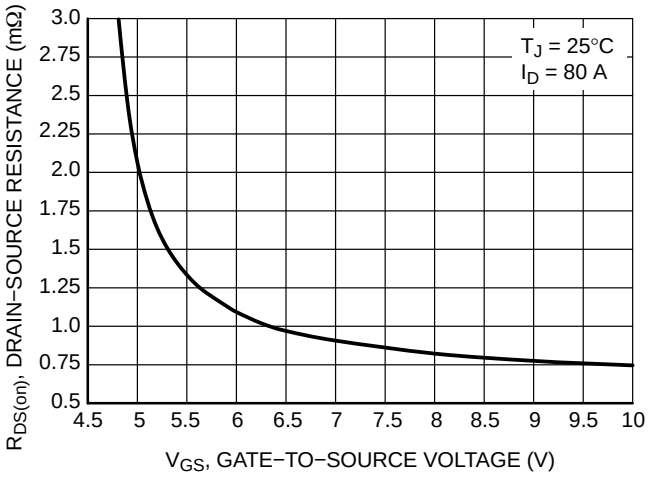

Figure 3. On−Resistance vs. V_{GS}

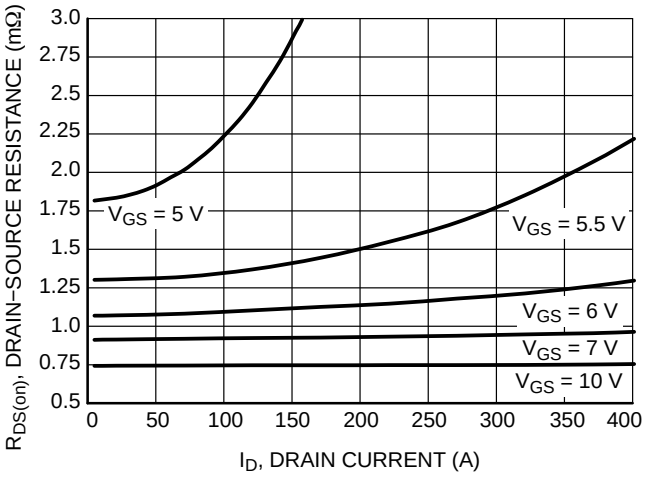

Figure 4. On−Resistance vs. Drain Current and Gate Voltage

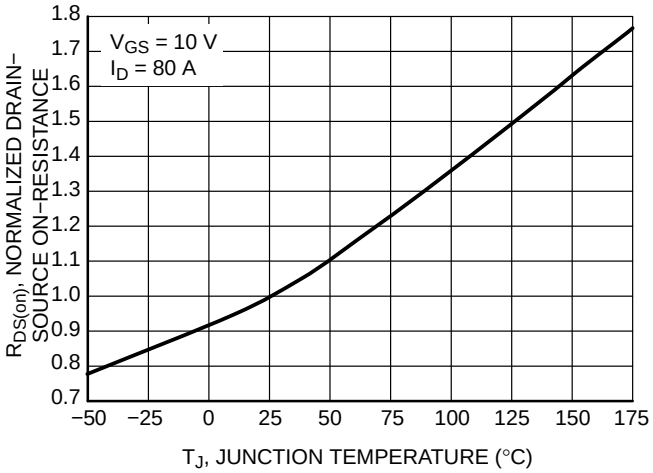

Figure 5. On−Resistance Variation with Temperature

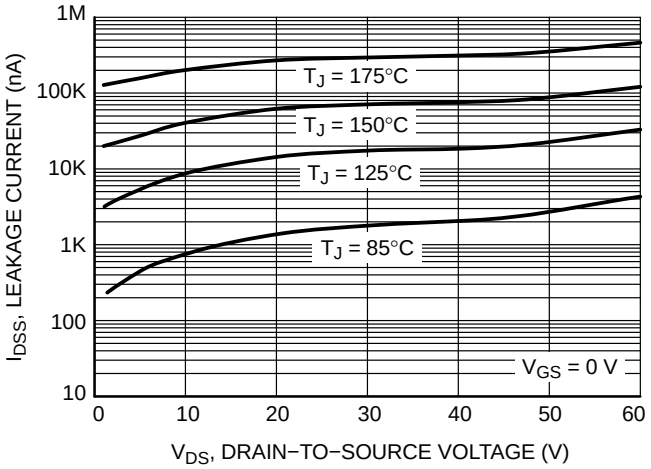

Figure 6. Drain−to−Source Leakage Current vs. Voltage

TYPICAL CHARACTERISTICS

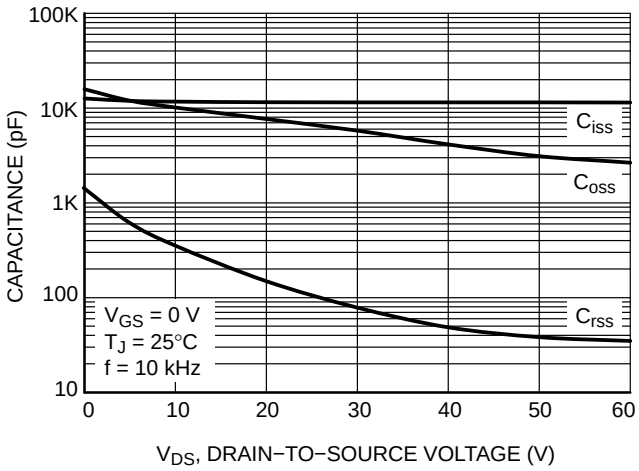

Figure 7. Capacitance Variation

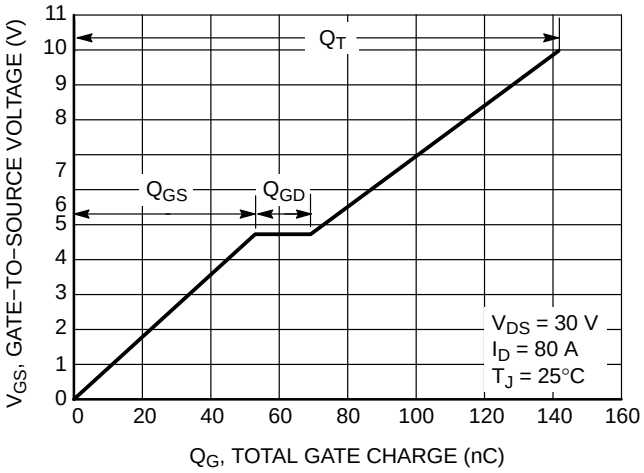

Figure 8. Gate−to−Source Voltage vs. Total Gate Charge

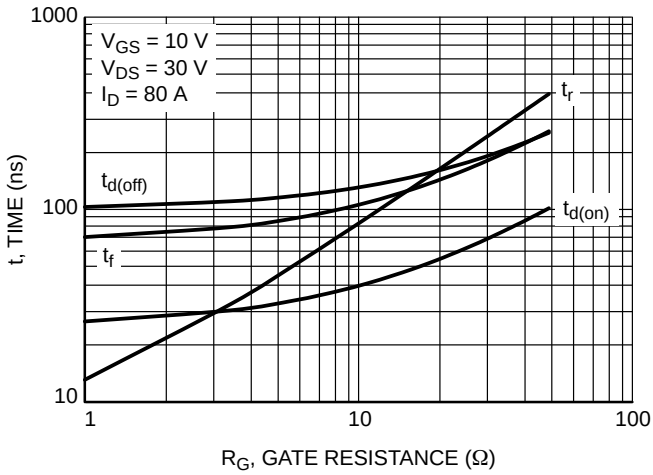

Figure 9. Resistive Switching Time Variation vs. Gate Resistance

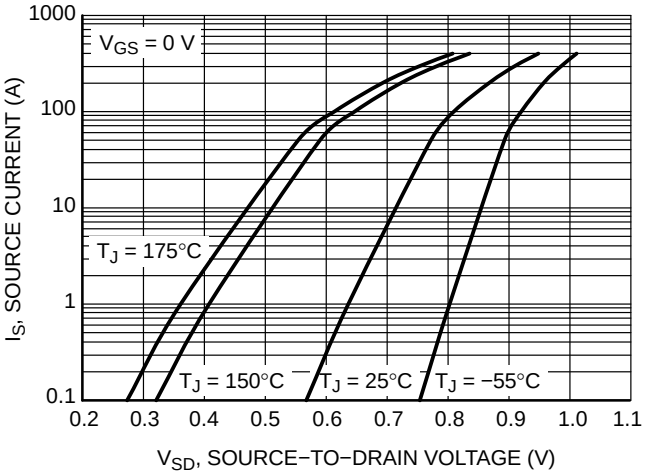

Figure 10. Diode Forward Voltage vs. Current

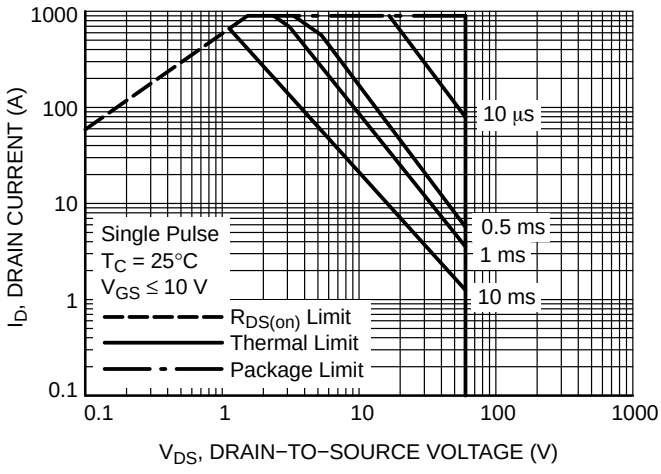

Figure 11. Maximum Rated Forward Biased Safe Operating Area

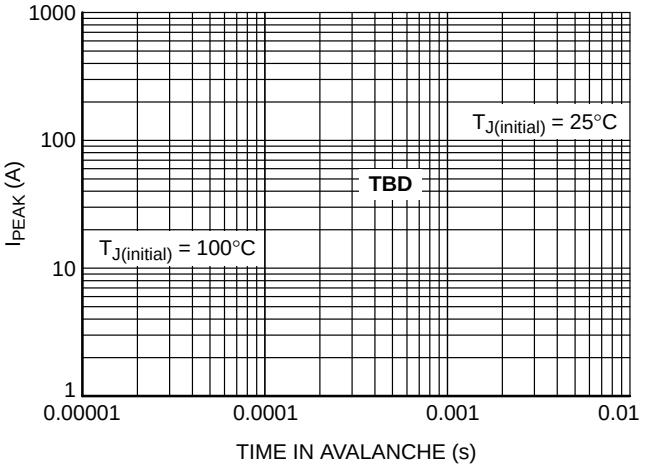

Figure 12. Peak Power

TYPICAL CHARACTERISTICS

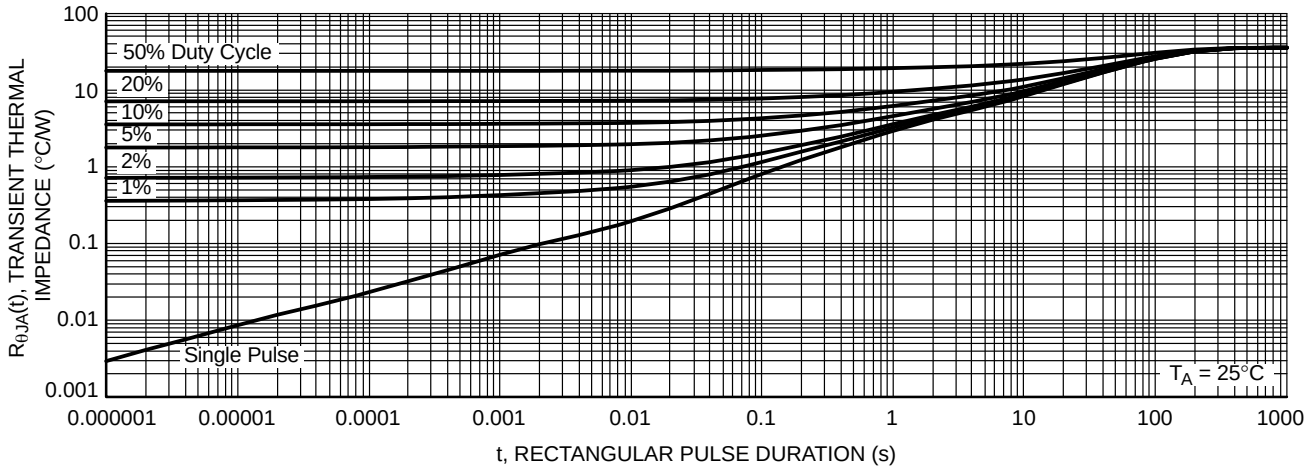

Figure 13. Thermal Response (Junction−to−Ambient)

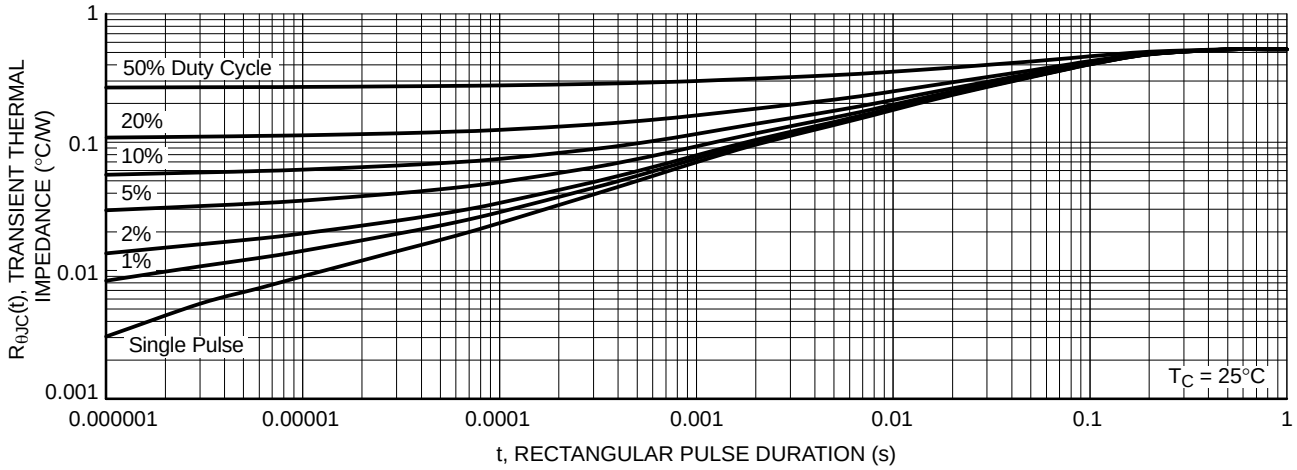

Figure 14. Thermal Response

MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS



H−PSOF8L 11.68x9.80
CASE 100CU
ISSUE C

DATE 22 MAY 2023

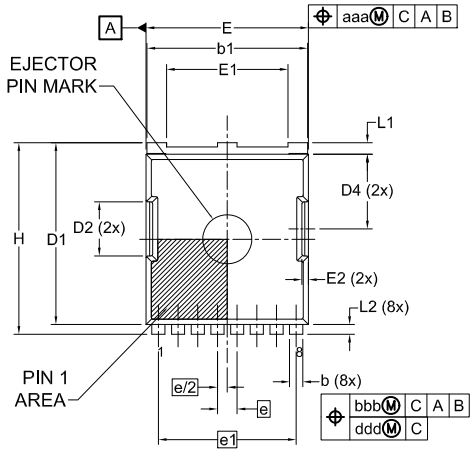

TOP VIEW



SIDE VIEW



DETAIL "A"
SCALE: 2X

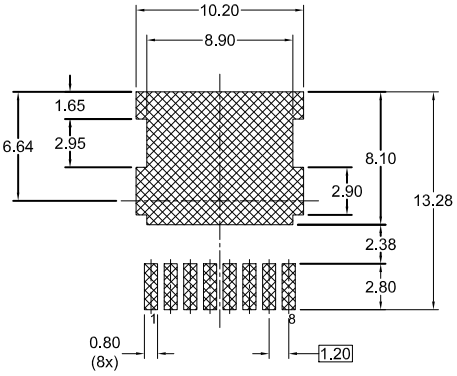

LAND PATTERN
RECOMMENDATION

*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

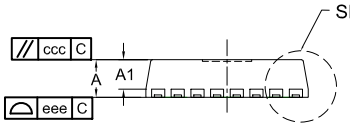

FRONT VIEW



DETAIL "B"
SCALE: 2X

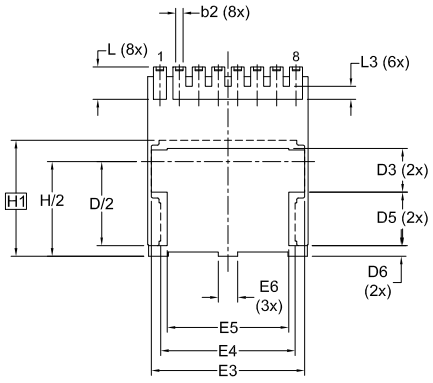

BOTTOM VIEW

NOTES:
1. PACKAGE STANDARD REFERENCE: JEDEC MO-299, ISSUE A.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
3. CONTROLLING DIMENSION: MILLIMETERS.
4. COPLANARITY APPLIES TO THE EXPOSED WELL AS THE TERMINALS.
5. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.
6. SEATING PLANE IS DEFINED BY THE TERMINALS. "A1" IS DEFINED AS THE DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	2.20	2.30	2.40
A1	1.70	1.80	1.90
b	0.70	0.80	0.90
b1	9.70	9.80	9.90
b2	0.35	0.45	0.55
c	0.40	0.50	0.60
c1	0.10	—	—
D	10.28	10.38	10.48
D/2	5.09	5.19	5.29
D1	10.98	11.08	11.18
D2	3.20	3.30	3.40
D3	2.60	2.70	2.80
D4	4.45	4.55	4.65
D5	3.20	3.30	3.40
D6	0.55	0.65	0.75
E	9.80	9.90	10.00
E1	7.30	7.40	7.50
E2	0.30	0.40	0.50
E3	9.36	9.46	9.56

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
E4	8.20	8.30	8.40
E5	7.40	7.50	7.60
E6	1.10	1.20	1.30
e	1.20 BSC		
e/2	0.60 BSC		
e1	8.40 BSC		
H	11.58	11.68	11.78
H/2	5.74	5.84	5.94
H1	7.15 BSC		
L	1.90	2.00	2.10
L1	0.60	0.70	0.80
L2	0.50	0.60	0.70
L3	0.70	0.80	0.90
Θ	0°	—	12°
aaa	0.20		
bbb	0.25		
ccc	0.20		
ddd	0.20		
eee	0.10		

GENERIC MARKING DIAGRAM*



A = Assembly Location
Y = Year
WW = Work Week
ZZ = Assembly Lot Code
XXXX = Specific Device Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98AON13813G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**H−PSOF8L 11.68x9.80**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales