

# ON Semiconductor

## Is Now

# onsemi™

To learn more about onsemi™, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

---

**onsemi** and **onsemi** and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.



**ON Semiconductor®**

<http://onsemi.com>

## A Solution for Peak EMI Reduction with Spread Spectrum Clock Generators

Prepared by: Apps Team, BIDC  
ON Semiconductor

---

### APPLICATION NOTE

#### Introduction

This application note will outline Spread Spectrum Clock Generators as a method to solve peak Electromagnetic Interference (EMI) issue, parameters of the spread spectrum clock, types of spread, and depict the effect of various amounts of frequency deviation on the signal with Modulation Domain Analyzer (MDA) and Spectrum Analyzer plots.

#### What is the problem?

Electromagnetic Interference is the Electromagnetic emission from a device or a system that interferes with the normal operation of another device or a system (external source). It is also referred to as Radio Frequency Interference (RFI). EMI is caused by electromagnetic induction or electromagnetic radiation emitted from an external source.

Conducted EMI and Radiated EMI are the two types of electromagnetic interference. Conducted EMI is caused by the physical contact of the conductors where as radiated EMI is caused by induction (without physical contact of the conductors).

EMI is an unwanted RF energy that interferes with other systems' normal operation. It is the excess radiated energy from the interfering device or the system, beyond the limits of electromagnetic compliance.

Disturbances experienced in local receiving equipments such as television, radio, and cell phones are examples of interference due to unwanted RF energy which is EMI.

With TV reception as an example, the poor picture quality seen could be due to EMI. Interference may prevent reception altogether, may cause only a temporary loss of a signal, or may affect the quality of the sound or picture produced by the interfered equipment.

Radio frequency interference can occur due to the harmonic frequencies of the interfering device or equipment even if the interfering device itself is not operating at the interfered frequency.

This interference is unwanted by the user as this would affect the normal operation of the device or system.

#### Why it is to be contained?

Legal limits have been imposed on electromagnetic emissions from all digital equipments and apparatus intended for general population, by monitoring bodies like the Federal Communication Commission (FCC) in the USA, the International Special Committee for Radio Interference (CISPR) in Europe, VCCI in Japan etc. Many countries now have similar requirements for products to meet some level of Electromagnetic compatibility (EMC) regulation. CISPR sets standards for radiated and conducted electromagnetic interference.

The FCC has two classes of radiation levels, stated as Class A and Class B. Class A devices are digital devices intended for use in commercial, industrial or businesses and not intended for use by the general public or in the home. Class B digital devices are intended to be used in the home but could also be used elsewhere.

The regulations and regulators are in place to ensure that the emissions from devices / systems released to market do not interfere with the normal functioning of other devices / systems already in the market.

Non-compliant products are at risk of being recalled which can negatively impact brand image. Thus ensuring EM compliance for products becomes critical for company's success.

With faster clock speeds, lower voltage/power requirements due to the recent advances in the semiconductor and computing technology coupled with the explosion of the wireless technologies, Electromagnetic compatibility (EMC) is becoming one of the most important standard requirements in the new technology world.

#### How it can be contained?

Reducing the interference levels from the EMI source is among the many approaches to Electromagnetic Compatibility. This can be achieved by reducing the signal level of the source or by frequency modulation at the source. Other means are careful system design, to modify the signal routing, adding local filtering, reducing the number of interconnections, increase the separation of the coupling

path, use of passives like the EMI/RFI filters, conductive coating, shielding, and operating frequency selection.

Use of bypass or decoupling capacitors on each active device (connected across the power supply, as close to the device as possible), and rise time control of high speed signals using Series damping resistors are some of the other methods used to control EMI. Shielding is usually a last resort after other techniques have failed, because of the added expense of shielding components such as conductive gaskets.

**Spread Spectrum Clock Generation (SSCG) – a Definition**

Spread Spectrum Clock Generation is a method by which the energy contained in the narrow band of a clock source is spread over a wider band in a controlled manner thus reducing the peak spectral amplitude of the fundamental and the harmonics to lower the radiated emission from the clock source. This is achieved by frequency modulating the clock with a unique waveform. Linear and Hershey Kiss profiles are commonly used to achieve the peak EMI reduction.

By varying the clock frequency over a band in a controlled manner, the time spent by the signal at a given frequency is reduced thereby the energy concentration at any frequency is reduced. Thus energy is spread over the band of frequencies reducing the peak amplitude.

**Using Spread Spectrum Clock Generators – Advantages**

Spread Spectrum Clock Generation provides a way to achieve EMC.

It is an active solution, preserves the integrity of the clock signal, can cover a wide frequency range to provide compliance, and is cost effective.

As compared to the traditional methods of using passive components like ferrite beads, RF chokes to suppress EMI, SSCG uses an integrated circuit of active devices to reduce the peak EMI using frequency modulation.

SSCG reduces peak EMI at the clock source, allowing system wide reduction of EMI of downstream clock and data

dependent signals. It allows for significant system cost savings by reducing the number of circuit board layers, ferrite beads, shielding and other passive components that are traditionally required to pass EMI regulations.

SSCG can be designed to be user programmable for ‘spread’ or can be custom made for the requirement.

Passive solutions predominantly use filters, and in some cases integrate ESD protection on each line for reducing EMI and consume no power. SSCG uses frequency modulation to spread the energy over a controlled band of frequencies to reduce peak EMI at source and of downstream clock and data signals. Being an active solution SSCG needs power for operation.

**Definition of Modulation Parameters**

Three parameters primarily control the Spread Spectrum on a clock source.

Modulation Rate (MR) is the rate at which the energy of the clock source is distributed over the band of frequencies around the output clock frequency. Modulation Rate will be much lower than the source clock frequency, and will be chosen to be above the audio frequency range.

Modulation Depth is the frequency range over which the clock will make the frequency excursion at the rate of MR. It is denoted by the percentage (%) spread which is the ratio of the band of frequency excursion ( $\Delta F$ ) to the output clock frequency. This would determine the amount of peak EMI reduction achievable. Generally, higher the Modulation Depth, greater is the EMI reduction. However the system constraints on the frequency variation need to be evaluated while selecting the modulation depth for a system.

Modulation profile will determine the effectiveness of the peak EMI reduction. Linear, and Hershey Kiss profiles are commonly used to implement the manner in which the frequency of the clock source is varied during spread spectrum clock generation.

Figures 1 through Figure 4 depict examples of the linear and Hershey Kiss profiles on MDA and Spectrum analyzer

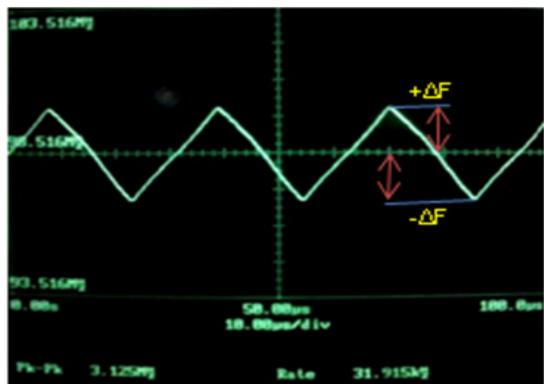


Figure 1. Linear Profile (MDA plot)

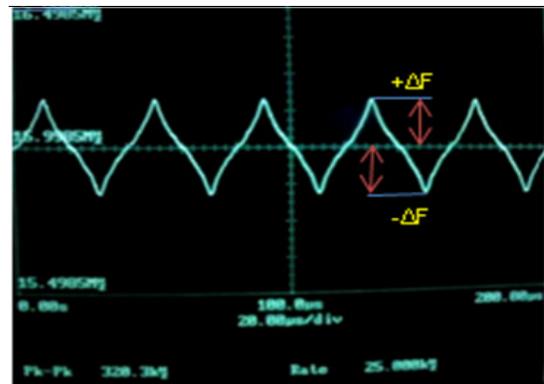


Figure 2. Hershey Kiss Profile (MDA Plot)



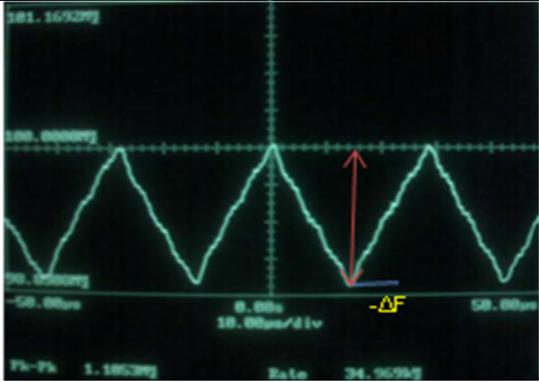


Figure 7. Down Spread (MDA Plot)

Up spread is where the minimum frequency of the spread spectrum clock will be the same as that of the non-modulated output clock. In a system where the non-modulated output clock is of the same frequency as the input frequency, the output clock will vary from  $f_c$  to  $(f_c + \Delta f)$  at MR as per the modulation profile. It can be represented as

$$f_o = f_c + \Delta f$$

where  $f_o$  = modulated output clock frequency

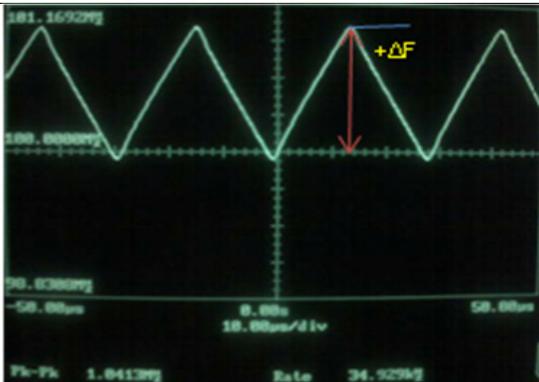


Figure 9. Up Spread (MDA Plot)

The effect of different modulation depth on the peak spectral amplitude reduction is shown in Figure 11. It is seen that with the increase in modulation depth, peak amplitude reduction increases. Peak spectral amplitude of an un-modulated clock (SSOFF) is also given for reference.

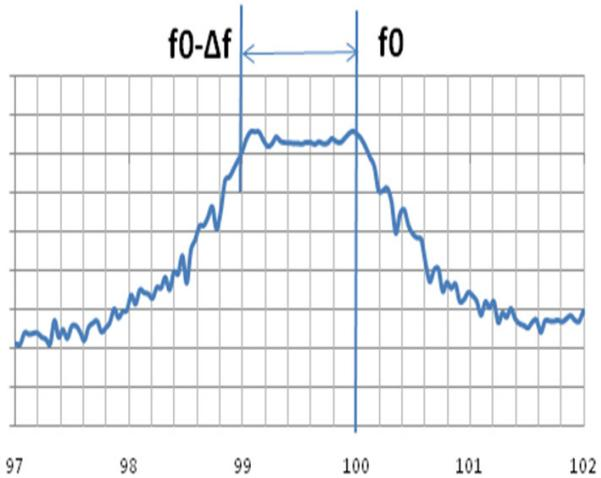


Figure 8. Down Spread (Spectrum Analyzer Plot)

$f_c$  = input clock frequency

$\Delta f$  = frequency excursion band

For example, a 100 MHz clock with a +1% modulation depth indicates that the modulated clock is varying over a band of 100 MHz to 101 MHz

MDA plot in Figure 9 and Spectrum Analyzer plot in Figure 10 depict the same.

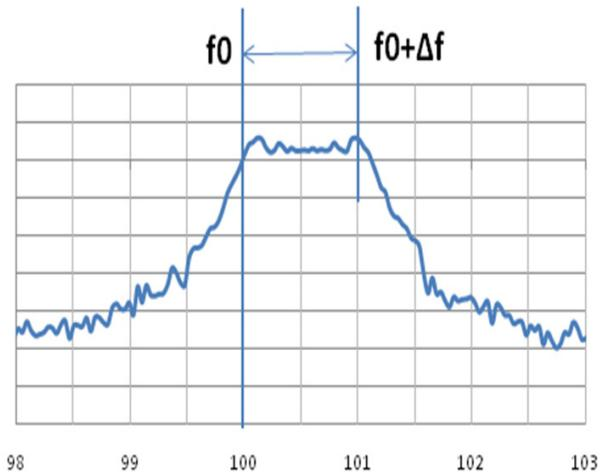


Figure 10. Up Spread (Spectrum Analyzer Plot)

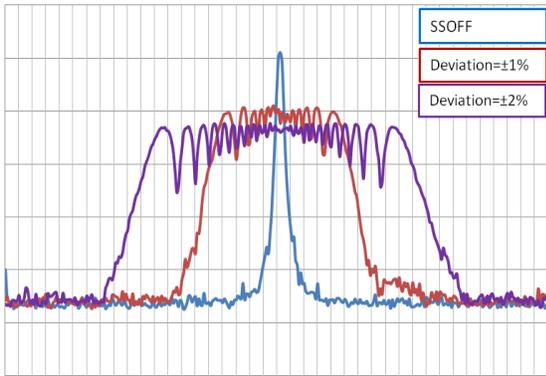


Figure 11. Effect of Variation in Modulation Depth

The peak amplitude reduction for various odd harmonics of a frequency modulated clock is shown in Figure 12. It is seen that the peak EMI reduction increases with the harmonic frequency. At the harmonic frequencies, the energy distribution is over a wider band. As such we see higher peak EMI reduction with the increased harmonic frequency. It is also seen that with increased frequency deviation, the peak EMI reduction also increases.

ON Semiconductor’s patented TIMING SAFE™ technology extends the benefits of conventional spread spectrum technology to synchronized clock and data interfaces. This allows system designers to address EMI

problems on local clocks rather than global clocks. More information on TIMING SAFE technology can be found at [http://www.onsemi.com/pub\\_link/Collateral/AND8443-D.PDF](http://www.onsemi.com/pub_link/Collateral/AND8443-D.PDF)

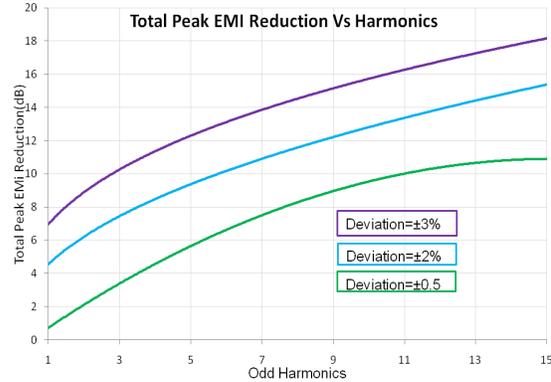


Figure 12. Peak EMI Reduction Across Harmonics

ON Semiconductor has many Spread Spectrum Clock Generators addressing the needs of various segments of the industry like computing, consumer, and industrial, to achieve EM compliance. For product details visit the website <http://www.onsemi.com>

TIMING SAFE is a trademark of Semiconductor Components Industries, LLC (SCILLC).

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

**PUBLICATION ORDERING INFORMATION**

**LITERATURE FULFILLMENT:**  
 Literature Distribution Center for ON Semiconductor  
 P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
 Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
 Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
 For additional information, please contact your local Sales Representative